


INDOOR/OUTDOOR DOME CAMERA SETUP GUIDE

INTRODUCTION

The ADC-VC825 from Alarm.com is a high-performance fixed dome camera optimized for indoor and outdoor video monitoring. Its discreet, compact design and outstanding HD quality video make the camera ideal for both commercial and residential video installations. The camera features a vandal-resistant exterior casing with an IP66 rating and Power over Ethernet (PoE) capabilities.

PRE-SETUP CHECKLIST

- ADC-VC825 camera (included)
- AC power adapter (required for non-PoE connections)
- Broadband (Cable, DSL or Fiber Optic)
- Internet connection with router
- A computer or mobile device with Internet access
- An Ethernet / Cat5 cable
- Login and Password for the Alarm.com account to which you will add the camera

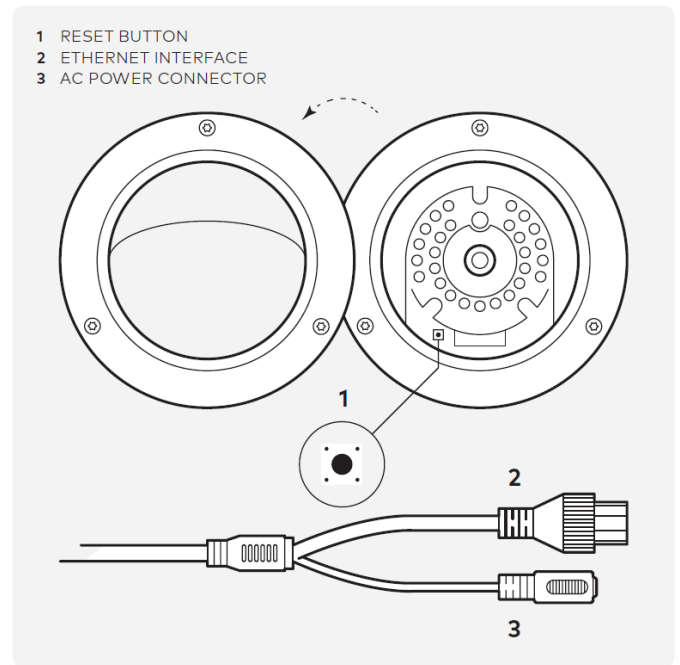

ADD THE CAMERA TO AN ALARM.COM ACCOUNT

Complete these steps prior to installing the camera in its final location:

1. Connect the camera to the router via an Ethernet cable.
2. If the Ethernet connection does not provide power, connect the camera to an AC power adapter and plug the adapter into a non-switched outlet.
3. Wait 2 minutes for the camera to connect to the Internet.
4. Add the device by either selecting the account in MobileTech OR by using a web browser and entering the following URL: www.alarm.com/addcamera
5. Select the camera from the video list or type in its MAC address to begin adding the camera. The camera's MAC address is located on the base of the camera.
6. Follow the on-screen instructions to finish adding the camera. You may configure camera settings from the Customer Website.

You can now power down the camera and install it in its final location using the included hardware.

TROUBLESHOOTING

If you have issues connecting the camera to the account, power cycle the camera and try again.

If issues persist, reset the camera to factory defaults by using the Reset button located under the camera cover.

- Disconnect the camera from the power supply.
- Unscrew and remove the camera cover, being careful not to damage the connecting wires.
- Press and hold the Reset button while reconnecting power. Continue to hold the Reset button for 10 seconds.

QUESTIONS?

Visit: www.alarm.com/supportcenter

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.