




AM-51D Adapting Plate for 4" Electrical Box - Prism Series Mount Installation Guide

Compatible Alarm.com cameras

- ADC-VC8498P
- ADC-VC8498PA


AM-51D Adapter Plate for 4" Electrical Box

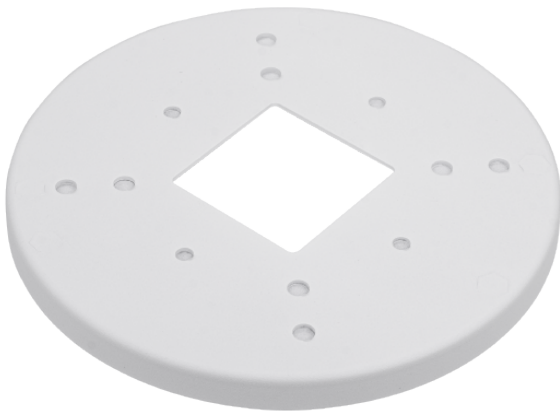

The AM-51D Adapting Plate for 4" Electrical Box can be ordered through the Partner Portal's [Order Equipment page](#).

In the box

- AM-51D
- Installation guide
- Panhead M3x10 screws (x3)
- Plastic stopper
- Double-sided tape

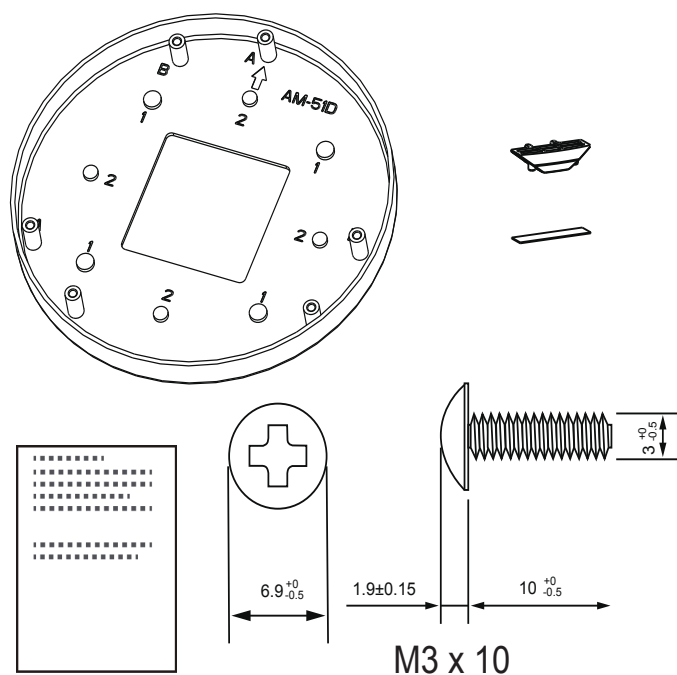

Mounting hole definitions and mounting cap dimensions



Camera mounting hole definitions

Reference the *In the box* image above for the mounting hole definitions outlined in this table:


Hole type	Compatible Cameras	Screw type	Number of screws
A	ADC-VC8498P, ADC-VC8498PA	M3x10	3

Electrical box mounting hole definitions


Reference the *In the box* image above for the mounting hole definitions outlined in this table:

Hole type	Compatible box	Example drawing	Screw type	Number of screws
1	4" octagon box		#8-32, L15 (User-supplied)	2
2	1" single gang box		#6-32, L15 (User-supplied)	2


Example with octagon box

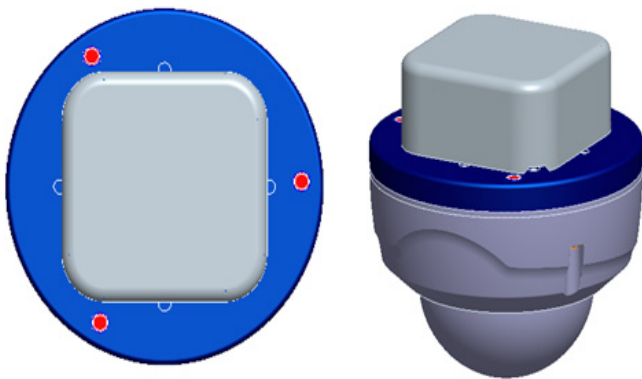

Example with single gang box

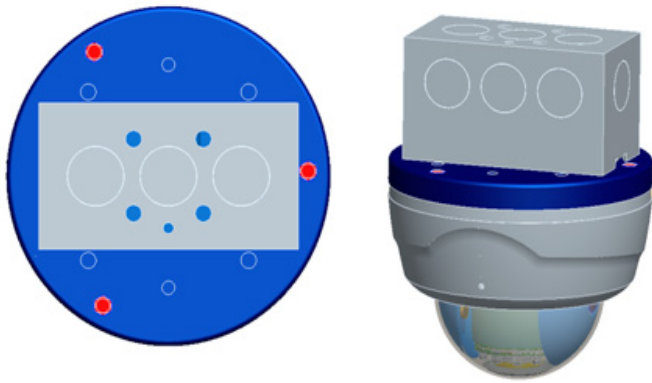


Mounting cap dimensions

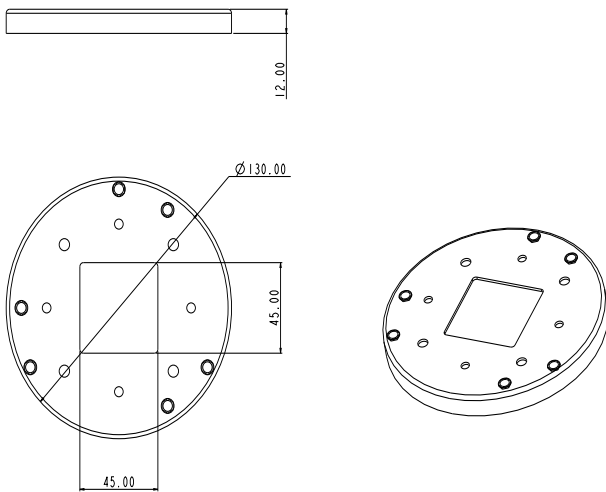


Pre-installation

1. Use a hammer and screwdriver to open the knock out holes needed for the installation.

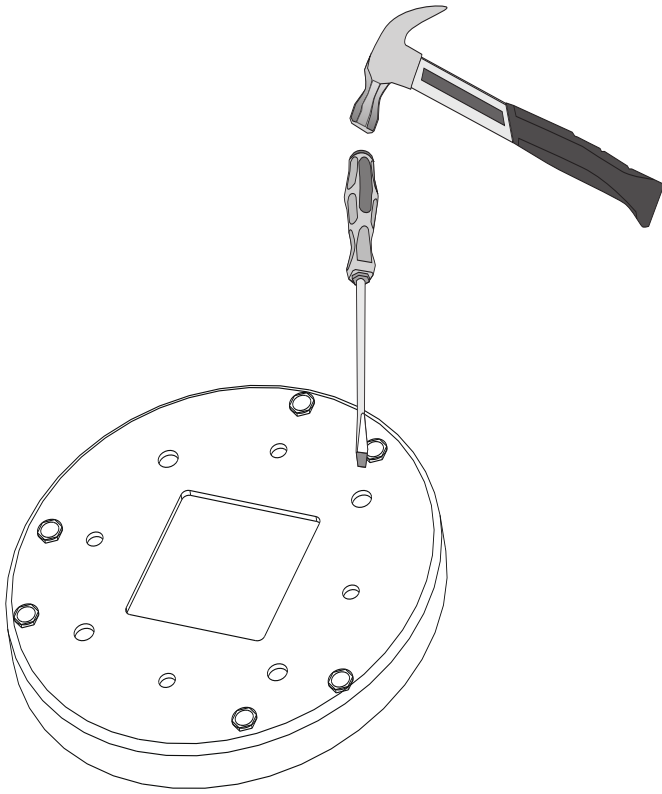


2. The camera's cowl must be removed in order to install the video device. Retain the camera screws and cover for re-installation after cable routing and mounting is complete.

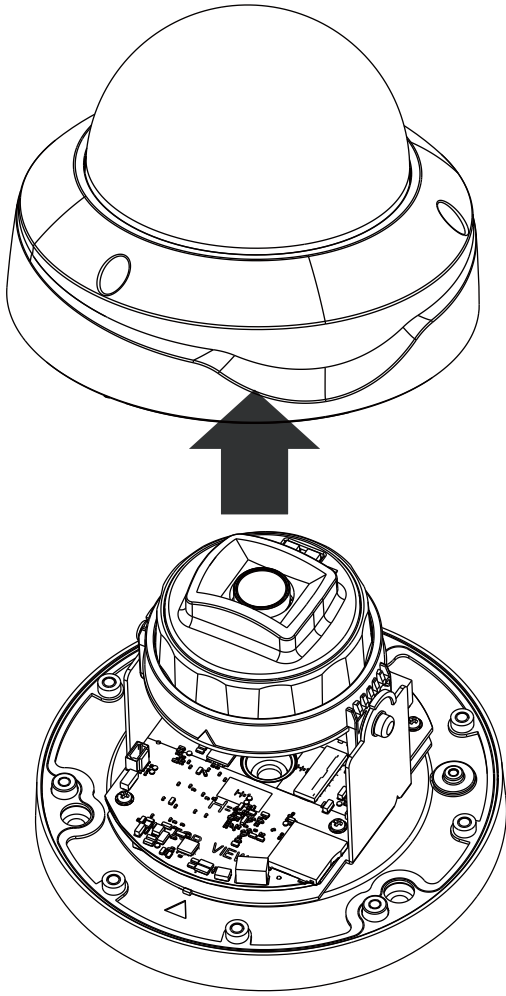


Installation instructions

1. Route cables through the electrical box.

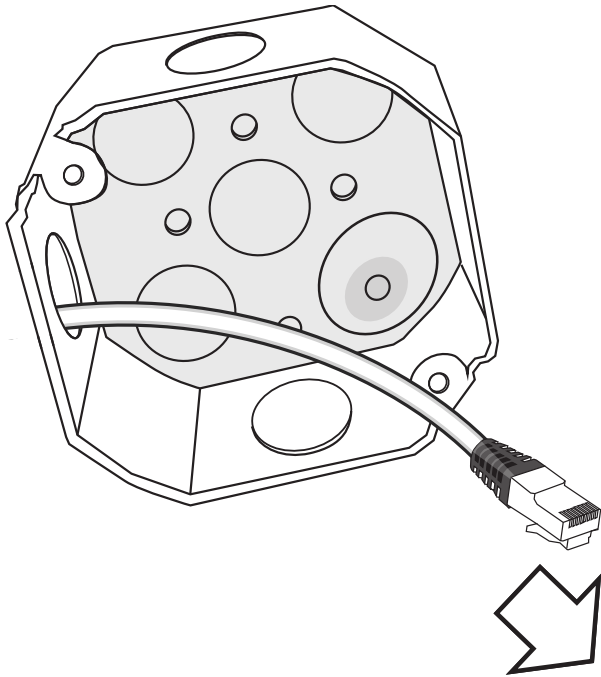


Note: Route the cables before you install the mounting accessories to a wall.


2. Install the mount cap to the electrical box. Verify the correct screw holes are being used based on the definitions outlined above.

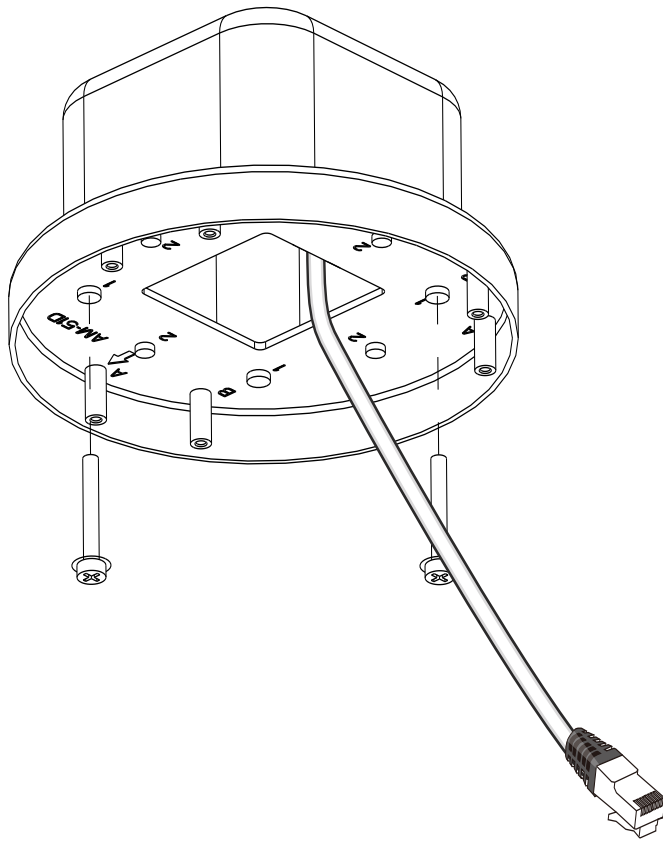

3. Install the camera to the mounting cap by fastening screws to the 'A' holes on the mounting cap. Refer to the camera's Installation Guide for how to make the waterproof connections. For more information, see [Prism Series Cameras - Installation Guide](#).

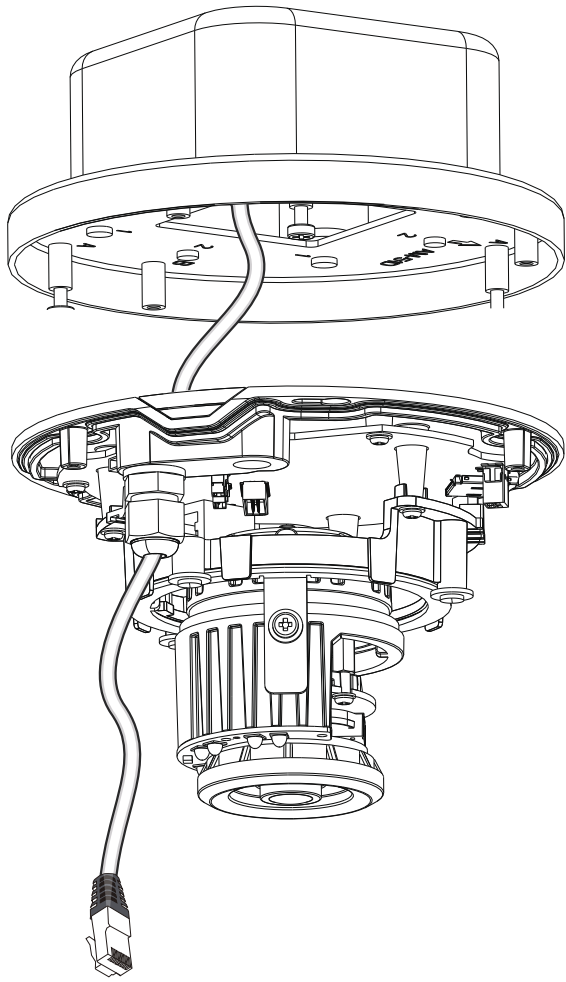

4. Open the camera's live view to assist with adjusting the camera's field of view as desired.
5. Re-install the dome cowl once the live view has been adjusted.

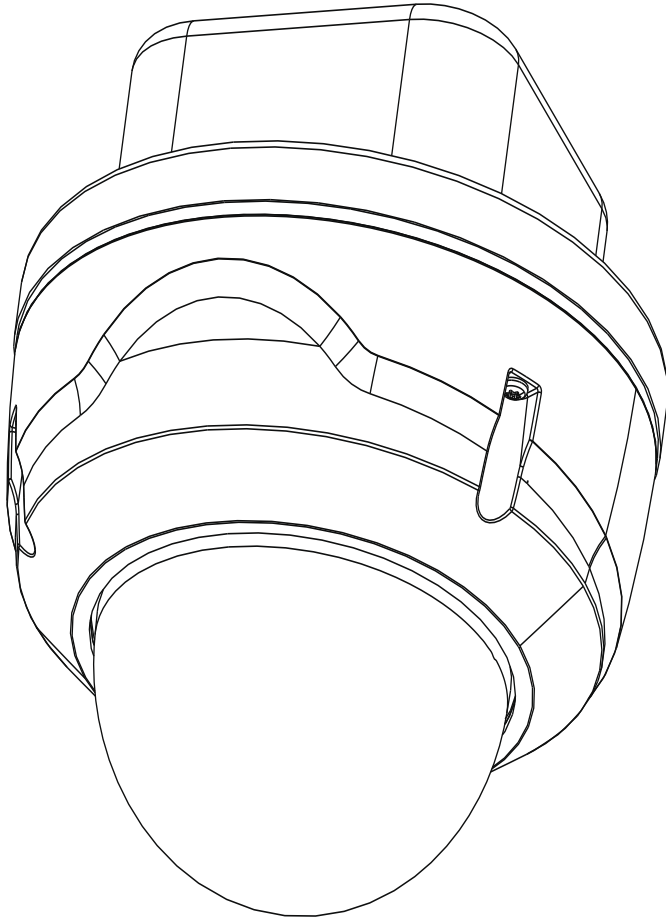

Additional resources

- For assistance with choosing the correct mounting accessories for your installation, see [Prism Series Camera Mounting Accessories](#).
- For steps and information about installing Prism Series Cameras, see [Prism Series Cameras - Installation Guide](#).