

## IQ2.1

### Secondary tablet for the IQ Panel



## NEED HELP?


(855) 4-QOLSYS  
TECHSUPPORT@QOLSYS.COM

### INFORMATION

Document#: IQ2.1-QG-12-15  
Revision#: 12/1/15  
Issue Date: DEC 2016  
Qolsys Part #: QW9101-840  
Software : IQ2-1.5  
Additional documentation located on [qolsys.com](http://qolsys.com)

The IQ2 is a 7" secondary tablet that can be installed to create additional access to the IQ Panel. You can pair up to three (3) of these tablets with the IQ Panel.

## IN THE BOX

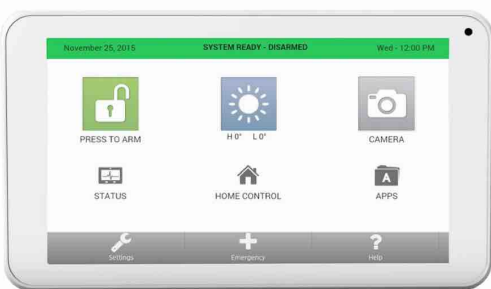

IQ2



Wall Mount Bracket and screws



Power supply



Optional Table Stand

## OPTION 1: WALL MOUNTING



Choose your location



Secure wall mount to the wall with provided hardware



Connect power supply to the back



Slide IQ2 onto wall mount bracket

## OPTION 2: TABLE STAND



Choose your location



Connect table stand to upper holes on the back of the device and snap into place



Connect your power supply

## POWER UP THE DEVICE




Press and hold the power button until the screen illuminates (approx 3-5 sec)

## CONNECTING THE IQ2 TO WI-FI

The IQ2 pairs with the IQ Panel over a secure Wi-Fi Network (802.11 B, G, N) and must be connected to the same network as the IQ Panel before you can add it to the system. To connect to a secure Wi-Fi:



Touch "Settings"



Type in Master Code (default is 1234)



Touch "WiFi Settings"



Touch "WiFi Settings"



Make sure Wi-Fi is turned on (swipe right)



Select network from available list. Enter Wi-Fi network password.

**IMPORTANT:** Please check that the IQ2 can successfully connect to the network in the chosen installation location


## PAIRING THE IQ2 WITH THE IQ PANEL



Perform the following steps on the IQ Panel to pair an IQ2 (*Note: The IQ Panel must be on 1.5.1 software or higher and connected to the same Wi-Fi Network as your IQ2*)



Touch "Settings"



Enter installer code (default is 1111)



Touch "Installation"



Touch "Security Account"



Scroll to the bottom of the page and make sure the box next to "IQ2 Panel" is checked.



Touch "Back" twice to get to the Settings page



Touch "IQ2 Devices"



Touch "Add New"



Touch "Quick Name" to open a selection of default name choices\*  
\*Or create a custom name by touching the "Device Name" box)



Enter the IP Address of the IQ2\* into the appropriate field on the IQ Panel then touch "Save"

The IQ2 will take a moment to synchronize with the IQ Panel over the network. Once complete it will display the home screen. To add additional IQ2 tablets repeat steps above with up to three (3) total devices.

To get the IP Address from your IQ2:



Touch "Settings"



Touch "About"



Locate "IP Address"