


# Pharos . . . Simply Brilliant

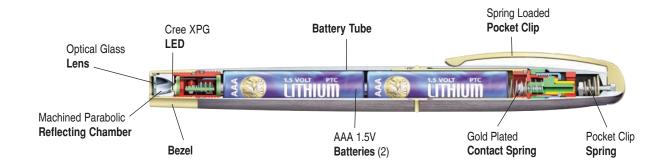

#### Background

Aerospace aluminum construction

Precision machined
O-ring sealed
Water resistant
Distinctive profile

# **Specifications**

 Length
 5.75"
 146.05 mm

 Diameter
 .530"
 13.462 mm

 Weight
 1.52 ounces (with batteries)
 43.09 grams

System 3 volt
High Level 180 lumens
Run Time 1 hour
Low Level 15 lumens
Run Time 12 hours

## **Body**

6061 T6 aluminum Brushed finish Architectural anodizing Gold accents

## Pocket Clip

Coil spring biased Non fatiguing



AAA Lithium Power Cells are available worldwide. ASP Link™ cases provide battery protection and storage.

#### Power Cells

1.5 volt Lithium AAA PTC protected Safety vent Ten year shelf life Leak proof Vibration resistant

## Activation

Rotary switch
Position location under stress
O-ring sealed
Positive circuit contact

#### Reflector Assembly

Machined aluminum
Computer calculated parabola
Metalized surface
Long distance penetrating beam
Room illuminating halo
Tempered optical glass lens

# **LED Assembly**

Proprietary heat management
Custom driver
Smart chip technology

## Pen Compliment

Matching body Matching finish Matching clip

# Warranty

Limited Lifetime





ASP