



# Dolphin<sup>®</sup> 9500/9550 Mobile Computer *Windows<sup>®</sup> Powered Pocket PC 2002*



User's Guide

---

## *Trademarks*

Dolphin, HomeBase, Mobile Base, and QuadCharger are trademarks or registered trademarks of Hand Held Products, Inc. Microsoft Pocket PC 2002, Windows, Windows NT, Windows 2000, Windows ME, Windows XP, ActiveSync, Outlook, and the Windows logo are trademarks or registered trademarks of Microsoft Corporation.

Intel is a registered trademark of Intel Corporation.

Chapter 7 (pages 7-1–7-11) contains copyrighted information from SyChip, Inc.

Chapter 7 (pages 7-12–7-25) contains copyrighted information from Meetinghouse Corporation. Meetinghouse, the Meetinghouse logo, and all other Meetinghouse trademarks/service marks contained herein are trademarks or registered trademarks of Meetinghouse.

The Bluetooth trademarks are owned by Bluetooth SIG, Inc., U.S.A. and licensed to HHP. Chapter 8 is copyrighted information used by permission from Bluetooth SIG, Inc.

Information appears in Chapter 9 (9-3–9-15 and 9-17–9-22) with permission from INTRINSYC Software, Inc.

Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

## *Disclaimer*

Hand Held Products, Inc. d/b/a HHP (“HHP”) reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HHP to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HHP.

HHP shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HHP.

© 2000-2004 Hand Held Products, Inc. All rights reserved.

Web Address: [www.hhp.com](http://www.hhp.com)

---

# Table of Contents

## Chapter 1 - Introduction

Required Safety Labels .....	1-2
Location.....	1-2
Dolphin 9500/9550 Batch Terminal.....	1-2
Regulatory and Safety Approvals for all Dolphin 9500/9550 Terminals .....	1-3
Dolphin 9500/9550 WLAN or WPAN Radio .....	1-4
FCC Compliance.....	1-5
Dolphin 9500/9550 Batch Terminal.....	1-5
Dolphin 9500/9550 RF Terminal with 802.11b and/or Bluetooth Radio.....	1-5
Dolphin 9500/9550 802.11b and/or Bluetooth R&TTE Compliance Statement .....	1-6
Pacemakers, Hearing Aids and Other Electrically Powered Devices .....	1-6
Microwaves .....	1-6
Care and Cleaning of the Dolphin 9500/9550 .....	1-6

## Chapter 2 - Getting Started

Overview.....	2-1
Dolphin 9500/9550 Models and Options.....	2-2
Image Engine Options .....	2-2
Dolphin 9500/9550 Peripherals .....	2-3
Dolphin 9500/9550 Accessories .....	2-4
Bar Code Symbolologies Supported .....	2-5
Using the Dolphin 9500/9550 for the First Time.....	2-6
Resetting the Terminal.....	2-12
Soft Reset (Warm Boot).....	2-12
Hard Reset (Cold Boot).....	2-12
Suspend Mode.....	2-12

## Chapter 3 - Dolphin 9500/9550 Overview

System Features .....	3-1
Front Panel Features .....	3-2
Back Panel Features.....	3-4
Dolphin 9500.....	3-4
Dolphin 9550.....	3-6
Side Panel Features .....	3-8
Bottom Panel Features .....	3-9
Mechanical Connector.....	3-9

---

Batteries .....	3-10
Main Battery Pack .....	3-10
The Li-ion battery pack requires four hours to charge completely. ....	3-10
Internal Backup Battery.....	3-10
Managing Battery Power.....	3-11
Default Critical and Low Battery Points .....	3-11
Setting Critical and Low Battery Points.....	3-11
Checking Battery Power.....	3-12
Storing Batteries .....	3-12
Guidelines for Battery Use and Disposal .....	3-12
Dolphin 9500/9550 Technical Specifications.....	3-13

### ***Chapter 4 - Using the Dolphin 9500/9550 Mobile Computer***

Entering Data .....	4-1
Today Screen .....	4-2
Navigation Bar.....	4-3
Command Bar.....	4-3
Pop-Up Menus .....	4-4
Selecting Programs .....	4-5
Imager .....	4-6
Decoding .....	4-6
Capturing Images .....	4-8
Using the Keyboards.....	4-9
35-Key Numeric/Alpha Keyboard .....	4-12
43-Key Alpha/Numeric Keyboard .....	4-13
56-Key Full Alpha/Numeric Keyboard.....	4-14
Key Combinations.....	4-14
Adjusting the Backlight .....	4-15
Color Display .....	4-15
Monochrome Display .....	4-15
Communication Media Options.....	4-17
Software Communication Programs .....	4-17
Radio Options .....	4-18
Radio Driver Installation.....	4-18
The Radio Manager .....	4-18
Powering Up a Radio .....	4-18
Entering Text Using the Input Panel.....	4-20
Using the SIP.....	4-20
Using the Letter Recognizer.....	4-20
Using the Block Recognizer.....	4-21
Selecting Text.....	4-21
Input Panel Options .....	4-22
Writing on the Screen .....	4-23
To Select Writing .....	4-23
Drawing on the Screen.....	4-24
Selecting a Drawing .....	4-24
Status Icons .....	4-25
Notifications.....	4-25

---

Finding and Organizing Information .....	4-26
--	------

## **Chapter 5 - Settings**

Overview .....	5-1
Personal Tab.....	5-2
Adding a Program to the Start Menu.....	5-3
System Tab.....	5-5
About .....	5-5
Backlight .....	5-6
Clock .....	5-6
CPU Speed .....	5-6
HHP WLAN Settings .....	5-6
IrDA Config .....	5-7
Memory .....	5-8
Power.....	5-11
Radio Manager .....	5-11
Regional Settings.....	5-11
Remove Programs .....	5-13
Screen .....	5-15
Connection Settings .....	5-16
Connections Tab.....	5-17
Deleting Connections .....	5-24
Creating a Custom Connection.....	5-24
Connecting.....	5-26
Network Card Connections .....	5-27
Network Adapters .....	5-28
Editing Properties .....	5-29

## **Chapter 6 - Communications**

Overview .....	6-1
Help on Connecting.....	6-1
Installing Additional Software .....	6-1
Using ActiveSync .....	6-2
Additional Capabilities.....	6-2
Requirements.....	6-2
Setting Up Your Desktop Computer .....	6-2
Synchronizing from Your Desktop Computer .....	6-2
Synchronizing from the Terminal .....	6-3
Adding Programs to the Terminal Using ActiveSync .....	6-3
Using Infrared .....	6-5
Verify That the IrDA Port is Enabled .....	6-5
Verify That Beam Settings Are Set to Receive .....	6-6
IrDA Port Location on the Terminal .....	6-6
Sending and Receiving Information.....	6-7
Troubleshooting.....	6-8
Using an ISP .....	6-9
Adding Programs Directly from the Internet .....	6-9

---

## **Chapter 7 - Wireless LAN Communications with 802.11b**

Overview .....	7-1
Powering Up the 802.11b Radio Driver .....	7-1
Configuring the 802.11b Radio.....	7-1
Accessing the Configuration Utility .....	7-1
The Configuration Utility .....	7-1
Status Tab .....	7-2
Config Tab.....	7-4
Advanced Tab.....	7-9
About Tab.....	7-10
The Status Icon .....	7-10
802.11b Wireless Security Supplement .....	7-12
Installing the AEGIS Client Software .....	7-12
Configuring the Pocket PC Client.....	7-16
Running AEGIS Client.....	7-17
Configuring the AEGIS Client Software.....	7-18
Port Setting Menus .....	7-22
Port Setting Parameters .....	7-24
Certificate Management .....	7-25

## **Chapter 8 - Wireless PAN Communications with Bluetooth**

Overview .....	8-1
Powering Up the Bluetooth Radio Driver .....	8-1
Setting Up Your Bluetooth Card.....	8-1
Assign COM Ports .....	8-2
Discover Bluetooth Device(s).....	8-3
Bond With Discovered Device(s).....	8-3
View Device Properties.....	8-5
Set Up Your Favorite Device .....	8-6
Change Views.....	8-6
Delete a Device From the Folder .....	8-7
Turn Radio Transmitter ON/OFF .....	8-8
Bluetooth ActiveSync .....	8-9
Bluetooth LAN Access .....	8-11
OBEX.....	8-14
Exchange Business Cards.....	8-14
Send a Contact.....	8-15
Send a File .....	8-16
Browse Remote Device .....	8-18
Receive Contact or File .....	8-22
Enable File Sharing .....	8-22
Using the Dialer .....	8-24
Get Connected Wizard.....	8-26
Dial-up to Your Network .....	8-29

---

## Chapter 9 - Applications

Calendar: Scheduling Appointments and Meetings.....	9-1
Using the Summary Screen .....	9-3
Creating Meeting Requests .....	9-3
Contacts.....	9-4
Using the Summary Screen .....	9-6
Tasks .....	9-7
Using the Summary Screen .....	9-9
Notes .....	9-10
Inbox .....	9-12
Synchronizing E-mail Messages .....	9-12
Connecting Directly to an E-mail Server .....	9-12
Using the Message List .....	9-13
Composing Messages .....	9-15
Managing E-mail Messages and Folders.....	9-15
Folder Behavior with a Direct Connection to an E-mail Server .....	9-16
Pocket Internet Explorer .....	9-17
Accessing Pocket Internet Explorer .....	9-17
Browse the Internet on Your Terminal.....	9-17
The Mobile Favorites Folder .....	9-18
Creating and Synchronizing Mobile Favorites.....	9-18
Using AvantGo® Channels .....	9-19
Companion Programs.....	9-21
Pocket Word.....	9-21
Using Pocket Word .....	9-21
Typing Mode .....	9-22
Writing Mode .....	9-23
Drawing Mode.....	9-24
Pocket Excel.....	9-25
Tips for Working in Pocket Excel.....	9-25

## Chapter 10 - Dolphin 9500/9550 HomeBase

Overview.....	10-1
Dolphin 9500/9550 HomeBase Parts and Functions .....	10-2
Front Panel .....	10-2
Rear Panel .....	10-4
Powering the HomeBase.....	10-5
HomeBase Serial Connector.....	10-6
Charging the Main Battery.....	10-7
To Power a Terminal and Charge its Main Battery.....	10-7
Charging a Spare Battery Using the Auxiliary Battery Well .....	10-7

---

Communications .....	10-8
Communications Types .....	10-8
Equipment Requirements .....	10-8
Setting up the HomeBase for RS-232 Communications .....	10-8
Setting up the HomeBase for USB Communication .....	10-10
Communicating with the Dolphin 9500/9550 Terminal .....	10-12
Verifying Communication .....	10-12
Verifying Data Transfer .....	10-12
Mounting the HomeBase .....	10-13
Desk Mounting .....	10-13
Wall Mounting .....	10-13

### ***Chapter 11 - Dolphin 9500/9550 Mobile Base***

Overview .....	11-1
Mobile Base Parts and Functions .....	11-2
Front Panel .....	11-2
Bottom Panel .....	11-3
Powering the Dolphin Terminal .....	11-4
Charging the Dolphin Terminal .....	11-4
Installing the Dolphin Mobile Base .....	11-5
Mounting the Mobile Base .....	11-5
Powering the Dolphin Mobile Base .....	11-6
Setting the Mobile Base Up for Communications .....	11-7
Connecting the Cables .....	11-7
Mobile Base Serial Connector .....	11-8
Configuring the Dolphin Terminal .....	11-8

### ***Chapter 12 - Dolphin 9500/9550 ChargeBase***

Overview .....	12-1
Dolphin ChargeBase Parts and Functions .....	12-2
Front Panel .....	12-2
Back Panel .....	12-2
Power Supply .....	12-3
Supplying Power to the ChargeBase .....	12-3
Inserting and Removing Terminals .....	12-4
Inserting .....	12-4
Removing .....	12-4
Charging Terminals in the ChargeBase .....	12-5
Mounting the ChargeBase .....	12-6
Bottom Panel .....	12-6
Using the DIN Rail .....	12-6
Using the Mounting Brackets .....	12-8

---

## **Chapter 13 - Dolphin 9500/9550 QuadCharger**

Overview .....	13-1
Dolphin QuadCharger Parts and Functions .....	13-1
Front Panel .....	13-1
Rear Panel.....	13-2
Supplying Power to the QuadCharger .....	13-3
Inserting and Removing Battery Packs.....	13-3
Storing Batteries .....	13-3
Charging Batteries in the QuadCharger .....	13-3
Using the Battery Analyzer.....	13-4
To Analyze a Battery.....	13-4
Mounting the QuadCharger .....	13-5
Troubleshooting .....	13-6

## **Chapter 14 - Warranty, Support, and Service**

Limited Warranty .....	14-1
How to Extend Your Warranty .....	14-1
Return Information.....	14-2
Calling for an RMA Number.....	14-2
Service and Repair Locations.....	14-2
Shipping.....	14-2
Repair .....	14-2
Technical Assistance.....	14-3
Assistance Online .....	14-3

## **Appendix A - Keyboards**

Overview .....	A-1
General Windows Keyboard Shortcuts .....	A-1
43-Key Alpha/Numeric Keyboard .....	A-2
Blue Key Functions and Characters .....	A-2
Red Key Functions and Characters .....	A-3
Key Combinations.....	A-3
35-Key Numeric/Alpha Keyboard.....	A-5
Blue Key Functions and Characters .....	A-5
Key Combinations.....	A-6
56-Key Full Alpha/Numeric .....	A-7
Key Combinations.....	A-9
Com Port Assignment Table .....	A-10



# Introduction

## Congratulations on the Purchase of Your New Dolphin 9500 or Dolphin 9550 Mobile Computer!

You have made a wise choice in selecting the Dolphin, a device known worldwide for its ergonomic form factor, light-weight, rugged design and single-handed data collection capabilities.

### Ergonomics

The patented shape of the Dolphin 9500 fits into either hand comfortably with major function keys that are easy to access. The adjustable hand strap on the back panel ensures a secure grip enabling true, one-handed operation. The integrated pistol-grip handle on the Dolphin 9550 provides intuitive point-and-shoot scanning over extended periods of use.

### Rugged Design

Dolphin 9500/9550 terminals are the most durable mobile computers on the market. Their rugged design can withstand repeated five-foot drops onto a concrete floor, extreme temperatures, and high humidity, moisture, and dust conditions. The terminals are independently

to meet IP64 specifications.

### Mobile Computing

Built to last, the Dolphin's durably built case houses

- A low-power, high-resolution digital image engine for omni-directional and auto-discrimination decoding of most bar code symbologies; see [Bar Code Symbologies Supported](#) on page 2-5.
- Co-located and integrated 802.11b and Bluetooth™ wireless radios for real-time data collection applications (optional)
- An Intel® X-Scale 400MHz RISC microprocessor for fast processing
- A Microsoft® Windows® for Pocket PC platform that is easily programmable with standard programming tools
- 64 MB RAM and 32 MB Flash memory configuration for ample and secure data storage
- An optional Secure Digital (SD) memory interface for additional memory capabilities

You can also install custom software applications, making the Dolphin 9500/9550 the ultimate mobile data collection solution for your enterprise needs.

### Additional Features

The Dolphin 9500/9550 features:

- Long-lasting Lithium Ion (Li-ion) batteries
- A large, easy-to-read 1/4 VGA (240 x 320) color or monochrome backlit touch screen that can display text or graphics
- Three keyboard options: 43-key alpha/numeric, 35-key numeric/alpha, and 56-key full alpha/numeric
- An industrial-grade connector that supports serial and USB communications, power in for charging and power, and power out to peripheral devices
- A full suite of compatible peripheral devices
- Decoding of stacked linear and matrix codes
- Digital picture capability
- Optical Character Recognition (OCR) functionality
- Audio jack for headset use
- IrDA port
- Speaker
- Microphone

### Application Development Tools

- Dolphin SDK for Pocket PC 2002 with embedded VB or C++
- Dolphin.NET SDK for Pocket PC 2002 with Visual Studio.NET 2003

### This User's Guide

The Dolphin 9500/9550 Mobile Computer User's Guide is designed to provide you with the information you need to make the most of your Dolphin terminal. Sections on the basics, safety, battery use, accessories, and service make this guide a complete source of information.

## Required Safety Labels


The Dolphin 9500/9550 mobile computer meets or exceeds the requirements of all applicable standards organizations for safe operation. However, as with any electrical equipment, the best way to ensure safe operation is to operate them according to the agency guidelines that follow. Please read these guidelines carefully before using your Dolphin mobile computer.

### Location

Safety labels appear on the back panel of both terminals. On the Dolphin 9500 units, the required information is contained in the label. On the Dolphin 9550, some required information is embedded in the plastic and the rest is in the label.

#### Dolphin 9500



Safety labels appear here.

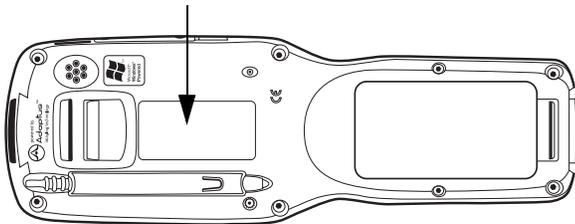

#### Dolphin 9550

Safety labels appear here.

Safety information is embedded in the plastic here.

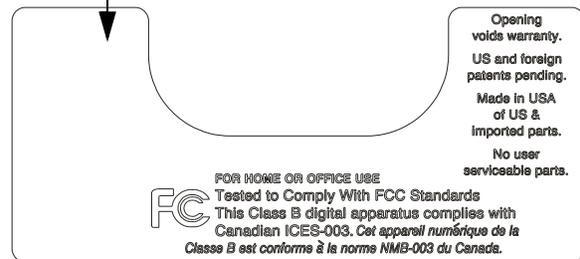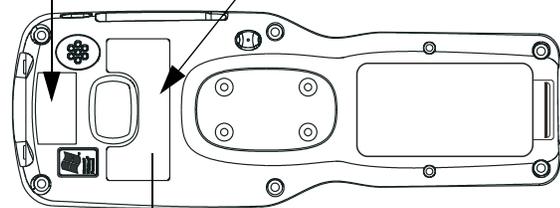

## Dolphin 9500/9550 Batch Terminal

The following are the required safety labels for batch terminals that appear on the back panel:

#### Dolphin 9500



#### Dolphin 9550



---

## ***Regulatory and Safety Approvals for all Dolphin 9500/9550 Terminals***

<b>Parameter</b>	<b>Specification</b>
U.S.A	FCC Part 15, Class B
Canada	ICES-003
European Community	EN 55022 (CISPR 22) Class B EN60950 EN60825-1 EN55024: 1998



The CE Mark on the product indicates that the system has been tested to and conforms with the provisions noted within the 89/336/EEC Electromagnetic Compatibility Directive and the 73/23/EEC Low Voltage Directive.

For further information, please contact:

Hand Held Products, Inc.  
Nijverheidsweg 9  
5627 BT Eindhoven  
The Netherlands

HHP shall not be liable for use of our product with equipment (i.e., power supplies, personal computers, etc.) that is not CE marked and does not comply with the Low Voltage Directive.

---

## Dolphin 9500/9550 WLAN or WPAN Radio

The Dolphin® 9500/9550 RF terminal is designed to comply with the most current applicable standards on safe levels of RF energy developed by the Institute of Electrical and Electronics Engineers (IEEE) and the American National Standards Institute (ANSI) and has been recommended for adoption by the Federal Communications Commission (FCC).

### 802.11b

The following is the required safety label that appears on the back panel of Dolphin RF terminals equipped with an 802.11b radio:

#### Dolphin 9500



#### Dolphin 9550



### Bluetooth

The following is the required safety label that appears on the back panel of Dolphin RF terminals equipped with a Bluetooth radio:

#### Dolphin 9500



#### Dolphin 9550



### 802.11b and Bluetooth

The following is the required safety label that appears on the back panel of the RF terminals equipped with an 802.11b and a Bluetooth radio combination:

#### Dolphin 9500



#### Dolphin 9550



---

## ***FCC Compliance***

Dolphin mobile computers meet or exceed all applicable standards and have been manufactured to the highest level of quality.

### ***Dolphin 9500/9550 Batch Terminal***

Dolphin 9500/9550 Batch terminals comply with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

### ***Dolphin 9500/9550 RF Terminal with 802.11b and/or Bluetooth Radio***

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

If necessary, the user should consult the dealer or an experienced radio/television technician for additional suggestions. The user may find the following booklet helpful: "Something About Interference." This is available at FCC local regional offices. Our company is not responsible for any radio or television interference caused by unauthorized modifications of this equipment or the substitution or attachment of connecting cables and equipment other than those specified by our company. The correction is the responsibility of the user. Use only shielded data cables with this system.

In accordance with FCC 15.21, changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



**This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. To maintain compliance with FCC RF exposure guidelines for body-worn operation, do not use accessories that contain metallic components and ensure that the terminal is at least 15mm (0.6 inches) from the body.**

## ***Canadian Compliance***

This Class B digital apparatus complies with Canadian ICES-003. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

To prevent radio interference to the licensed service, this device is intended to be operated indoors and away from windows to provide maximum shielding. Equipment (or its transmit antenna) that is installed outdoors is subject to licensing.

Cet appareil numérique de la Classe B est conforme à la norme NMB-003 du Canada.

---

## ***RF, Regulatory, and Safety Agency Approvals***

<b>Parameter</b>	<b>Specification</b>
RF Approvals	
U.S.A	FCC Part 15.247
Canada	RSS 210
Europe	ETS 300 328
Mexico	Telecom RCPHAD002-485

## ***Dolphin 9500/9550 802.11b and/or Bluetooth R&TTE Compliance Statement***

The HHP Dolphin 9500RF and Dolphin 9550RF are in conformity with all essential requirements of the R&TTE Directive (1999/5/EC). This equipment has been assessed to the following standards:

<b>Parameter</b>	<b>Specification</b>
R&TTE	EN 300 328-2:2000 EN 301 489-1 (August 2000) EN 301 489-17 (Sept. 2000) EN 60950: 1992 Incl Amdt 1-4,11 EN 50361: 2001

This product is marked with **CE 0681** in accordance with the Class II product requirements specified in the R&TTE Directive, 1999/5/EC.

The equipment is intended for use throughout the European Community. Its authorization for use in France is restricted as follows:

PAN European Frequency Range: 2.402 - 2.480 GHz

Restricted Frequency Range for use in France: 2.448 - 2.480 GHz

## ***Pacemakers, Hearing Aids and Other Electrically Powered Devices***

Most manufacturers of medical devices adhere to the IEC 601-1-2 standard. This standard requires devices to operate properly in an EM Field with a strength of 3V/m over a frequency range of 26 to 1000MHz.

The maximum allowable field strength emitted by the Dolphin is 0.3V/m according to Subpart B of Part 1 of the FCC rules. Therefore, the Dolphin RF has no effect on medical devices that meet the IEC specification.

## ***Microwaves***

The radio in the Dolphin RF terminal operates on the same frequency band as a microwave oven. Therefore, if you use a microwave within range of the Dolphin RF terminal you may notice performance degradation in your wireless network. However, both your microwave and your wireless network will continue to function.

The Dolphin Batch terminal does not contain a radio, and therefore, is not affected by microwave ovens.

## ***Care and Cleaning of the Dolphin 9500/9550***

When needed, clean the image engine window and the LCD display with a clean, non-abrasive, lint-free cloth. The terminal can be cleaned with a damp cloth.

## Getting Started

### *Overview*

The Dolphin 9500/9550 mobile computer is designed for easy, single-handed mobile data collection. Each mobile computer is equipped with an Intel PXA255 400MHz RISC processor for fast processing and is built to run the Pocket PC 2002 platform.

Dolphin 9500/9550 computers are available with different types of 2D imagers and wireless radios to meet most any enterprise mobile data collection requirement. There are three keyboard options and a 240 x 320 pixel, backlit 1/4 VGA display available in color or monochrome.

The Dolphin 9500/9550 platform contains an integrated imager that can take digital images of damaged packages and recipient signatures, for example, in addition to decoding standard linear and two-dimensional symbologies.

### **Adapting the Dolphin to Your Environment**

The Dolphin 9500/9550 comprises one element of an enterprise data collection system that includes various models, peripherals, and accessories that you can combine to suit your exact needs.

---

## ***Dolphin 9500/9550 Models and Options***

HHP's family of Dolphin 9500/9550 mobile data collection terminals includes these models:

### **Dolphin 9500 Batch**

This is a Pocket PC mobile computer with a unique, ergonomic shape designed for single-handed use. The standard Dolphin 9500 is available with 64 MB RAM and 32 MB non-volatile Flash. The industrial, mechanical connector supports serial RS-232 up to 115 Kbps and USB communications up to 12 Mbps. It also features an IrDA infrared port to communicate data to portable printers and IrDA compliant devices.

For additional functionality, an integrated digital imager is available for imaging and decoding. For additional memory, an optional Secure Digital (SD) memory interface is also available.

### **Dolphin 9550 Batch**

This mobile computer offers the same enhanced productivity features of the Dolphin 9500 terminal with the added convenience of an integrated pistol grip-style form factor for high volume scanning applications.

### **Dolphin 9500/9550 WLAN (802.11b)**

These terminals integrate the basic functionality of the Batch terminals with an integrated, IEEE 802.11b direct sequence radio that enable communication with a host computer through a wireless local area network (WLAN).

### **Dolphin 9500/9550 WPAN (Bluetooth)**

This terminal allows Bluetooth communications to Bluetooth enabled devices such as printers, mobile phones, access points, Bluetooth-enabled PCs, etc.

### **Dolphin 9500/9550 WLAN and WPAN (802.11b and Bluetooth)**

This terminal features co-located 802.11b and Bluetooth radios, which means that your terminal contains the capabilities of both radios while being able to switch between them.

## ***Image Engine Options***

Dolphin 9500/9550 terminals may be equipped with one of the following:

- IMAGETEAM™ 4100SR: green aimer scans from 2.5 to 12.5 in. (6.3 to 32 cm.)
- IMAGETEAM™ 4100SF: green aimer scans from 2.1 to 8.9 in. (5 to 22.6 cm.)
- IMAGETEAM™ 4100HD: green aimer scans from 2.2 to 6.5 in. (5.6 to 16.5 cm.)

Specifications are for 100% UPC Code.

---

## *Dolphin 9500/9550 Peripherals*

Each of the following items is sold separately to enhance your Dolphin 9500/9550 terminals capabilities.

### **Dolphin HomeBase™**

The Dolphin HomeBase charging and communication cradle supports both RS-232 and USB communications, which enable it to interface with the majority of PC-based enterprise systems. When a terminal is seated in the HomeBase, its main battery pack charges in less than four hours. In addition, the HomeBase contains an auxiliary battery well that charges a spare Li-ion battery.

For more information, see [Dolphin 9500/9550 HomeBase](#) on page 10-1.

### **Dolphin Mobile Base**

The Dolphin Mobile Base charging and communication cradle is designed specifically for in-premise and in-transit data collection applications. It features a flexible mounting bracket, a cigarette lighter adapter, and power cable to adapt it to your environment.

When a terminal is seated in the Mobile Base, its main battery pack charges in less than four hours. The serial connector supports RS-232 communication and power out to peripheral devices, such as hand held scanners.

For more information, see [Dolphin 9500/9550 Mobile Base](#) on page 11-1.

### **Dolphin ChargeBase**

The Dolphin ChargeBase is a four-slot charging cradle that holds, powers, and charges a terminal in each slot.

For more information, see [Dolphin 9500/9550 ChargeBase](#) on page 12-1.

### **Dolphin Net Base**

The Dolphin Net Base is a four-slot charging/communication cradle that holds, powers, charges, and communicates with the terminal in each slot. Communications occurs via Ethernet and dynamically-assigned IP addresses.

For more information about the Dolphin Net Base, please consult the Dolphin 9500/9550 Net Base Quick Start Guide.

### **Dolphin QuadCharger™**

The Dolphin QuadCharger is a four-slot charging station for Dolphin Li-ion battery packs. It can charge each battery in less than four hours. The fourth slot features a battery analyzer that completely resets and re-calibrates a battery and displays its resulting capacity.

For more information, see [Dolphin 9500/9550 QuadCharger](#) on page 13-1.

---

## ***Dolphin 9500/9550 Accessories***

Each of the following items is sold separately to enhance your Dolphin 9500/9550 terminals capabilities.

### **Charging/Communication Cables**

USB and serial cables connect the Dolphin 9500/9550 directly to both a peripheral device for communication and a power source for charging.

### **Dolphin Mobile Charger**

This charging cable plugs the terminal directly into a vehicle cigarette lighter/power port to power the terminal and charge the battery pack. This accessory converts the 12 Volts out of the vehicle to the 9 Volts required by the terminal.

### **Protective Enclosure**

This enclosure wraps around the terminal to protect it from wear and tear.

### **Protective Holster**

The protective holster secures the terminal for mobile use.

### **Dolphin Mobile Mount**

The Dolphin Mobile Mount solution secures the Dolphin 9500 computers in place in the cab of any vehicle. Used in conjunction with the Mobile Charger, Dolphin terminals can be adapted to almost any in-transit environment.

### **Li-ion Battery Pack**

The 7.4v, 14.8 watt hour Li-ion rechargeable battery pack provides the main power supply for Dolphin 9500/9550 terminals.

## *Bar Code Symbologies Supported*

<b>Symbology type</b>	<b>Symbologies supported</b>
<b>1D Symbologies</b>	Codabar Code 3 of 9 Code 11 Code 32 Pharmaceutical (PARAF) Code 93 Code 128 EAN with Add-On and EAN with Extended Coupon Code EAN-13 Interleaved 2 or 5 Matrix 2 of 5 Plessey PosiCode RSS Straight 2 of 5 IATA Straight 2 of 5 Industrial Telepen Trioptic Code UCC/EAN-128 UPC and UPC-A
<b>2D Symbologies</b>	Aztec Code 16K Composite Data Matrix MaxiCode OCR PDF417 QR RSS
<b>Composite Codes</b>	Aztec Mesa Codablock F EAN-UCC RSS-14
<b>OCR Codes</b>	OCR A and OCR B
<b>Postal Codes</b>	Postnet and most international 4 state codes Australian Post British Post Canadian Post China Post Japanese Post KIX (Netherlands) Post Korea Post Planet Code

---

## Using the Dolphin 9500/9550 for the First Time

### Step 1. Unpack the Carton and Verify its Contents

Verify that the carton contains the following items:

- Dolphin 9500/9550 mobile computer (the terminal)
- Main battery pack (7.4v Li-Ion)
- Microsoft Companion CD
- Dolphin 9500 Quick Start Guide

Be sure to keep the original packaging in the event that the Dolphin terminal should need to be returned for service. For details, see [Return Information](#) on page 14-2.


Each order includes a Dolphin Software Development Kit and User's Guide CD; verify that you received this CD with your order. If you ordered accessories for your terminals, verify that they are also included with the order.

#### The Dolphin 9500 Handstrap

The Dolphin 9500 ships with the handstrap installed and fastened with a clip on the bottom panel; see [Bottom Panel Features](#) on page 3-9. To install the battery pack, you must detach the handstrap.

To detach the handstrap, push the clip of the handstrap down and away from the terminal. Move the strap up and away from the bottom panel.

To re-attach the handstrap, slide the clip back into place on the bottom panel.

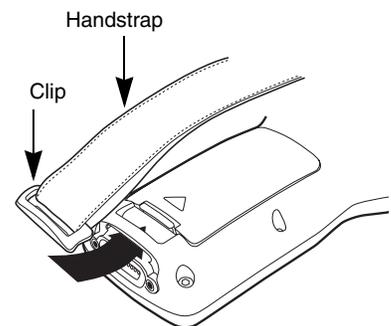


### Step 2. Install the Main Battery Pack



*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

1. Unpack the Li-ion battery pack. Hold the terminal with the front panel (keyboard) facing down. On the Dolphin 9500, detach the handstrap.
2. Take the battery and insert the end without the locking tab into the top of the battery well and push down with a hinging motion until the locking tab snaps.
3. On the Dolphin 9500, re-attach the handstrap.

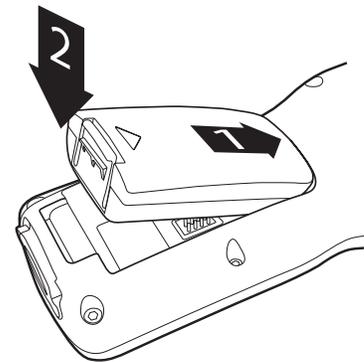

#### To Remove the Main Battery Pack

1. Detach the handstrap (on the 9500).
2. Press the locking tab on the battery pack away from the bottom panel, and pull the battery pack up with a hinging motion.

### Step 3. Charge the Main and Backup Batteries

The power supply for the Dolphin mobile computer consists of two types of battery power: the main battery pack installed on the back panel and the backup battery that resides inside the terminal.

The main battery powers the terminal. The internal backup battery charges off the main battery and maintains the application data stored in RAM and system clock for up to 30 minutes when the terminal's main battery pack is completely discharged or removed.

**Before initial use** - The terminals are shipped with both batteries discharged of all power. Charge the main battery pack for a minimum of four hours before initial use.

When installed in the terminal, the battery pack can be charged in the HomeBase, Mobile Base, or with the appropriate charging cable. When not installed in the terminal, battery packs can be charged in the QuadCharger or the auxiliary well of the HomeBase.

**Time to Charge** - Four hours for the main battery pack, eight hours for the internal backup battery the first time.




Use only Dolphin 9500 series peripherals, power cables, and power adapters. Use of peripherals, cables, or power adapters not sold/manufactured by HHP will void the warranty and may damage the terminal.


### ***Using the Dolphin HomeBase***

1. Connect the HomeBase to the power supply provided by HHP.
2. Slide the terminal (with installed battery pack) into the terminal well until the Dock LED lights solid green to indicate that the terminal is properly seated.
3. The battery pack begins charging.

### **Charging a Spare Battery Pack**

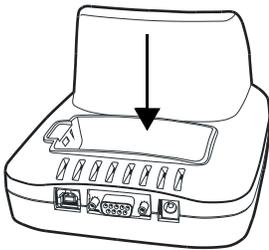

The HomeBase features an auxiliary battery well. Insert a spare battery pack into this well and the battery charges in four hours. The auxiliary battery well charges batteries independently of the terminal well.

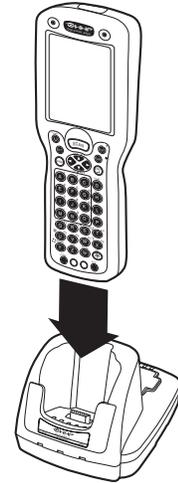


### ***Using the Mobile Base***

1. Connect the Mobile Base to the appropriate power source using an HHP cable.
2. Slide the terminal (with installed battery pack) into the terminal well until the Dock LED lights solid green to indicate that the terminal is properly seated.
3. The battery pack begins charging.

### ***Other Charging Options***

When the Li-ion battery is installed in the terminal, connect a charging/communication cable such as the Mobile Charger to the 17-pin connector and plug the cable into a power outlet.

When the Li-ion battery is not installed in the terminal, place the battery pack in the Dolphin QuadCharger.

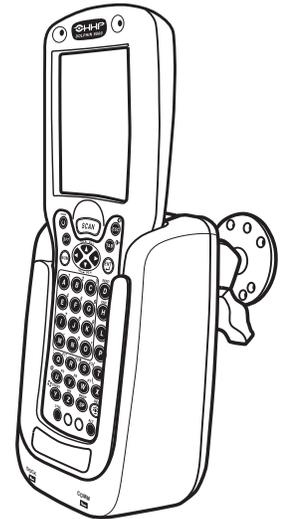

---

## Step 4. Initialize the Mobile Computer


1. When power is applied from a newly installed battery, the decode LED lights and the scan LED blinks for approximately three seconds. Do **NOT** press any keys while the terminal is booting up.
2. The terminal initializes and the HHP splash screen displays for a few seconds. The Build numbers indicate the software version number.



3. The system performs a hard reset. When the display activates again, follow the instructions that appear.

## Step 5. Align the Screen




You are prompted to align the screen by tapping the target five times. Use the stylus provided by HHP.

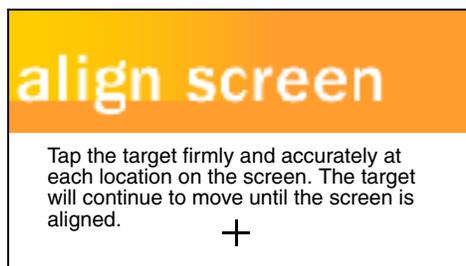

- Alignment should always be performed with a stylus designed for touch screen applications. The small point is required for accurate calibration.
- Press the stylus firmly into the center of the cross-hair target once and release. Do not “double-tap” the target.
- You can re-align the screen at any time by going to **Start > Settings > System tab > Screen**.

## Step 6. Complete the Screens


After aligning the screen, follow the directions on the screen which take you through a simple exercise showing how to use the stylus and pop-up menus.

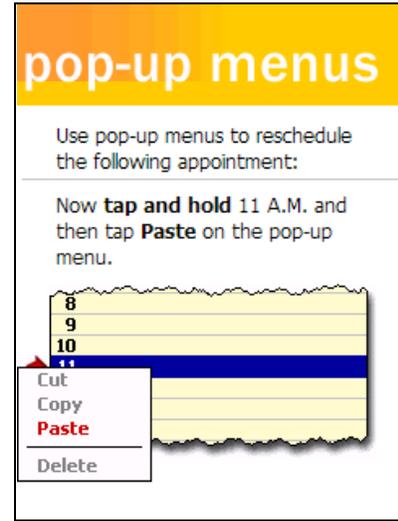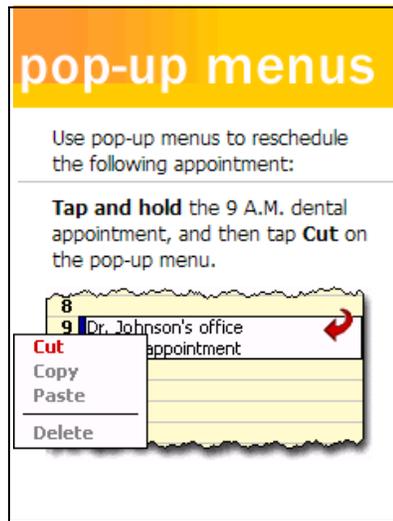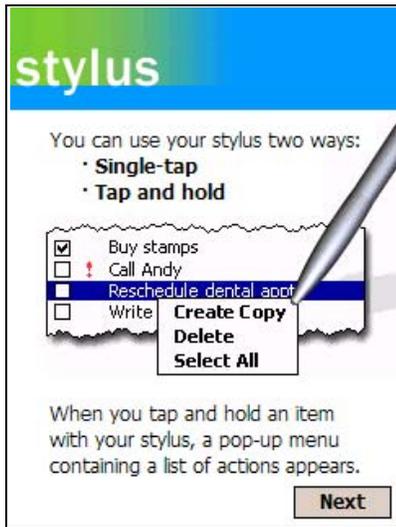

*Note:* HHP recommends using screen protectors for Dolphin 9500/9550 terminals; especially for those terminals used within applications that require high-volume interfacing with the touch screen. Screen protectors help prevent damage to the touch screen and are easily installed. Screen protectors can be purchased at any major computer retail store or directly from HHP, Inc. Please contact HHP directly for part numbers and pricing.

### Step 7. Set the Time Zone

After screen alignment is completed, the Location screen shown below displays.

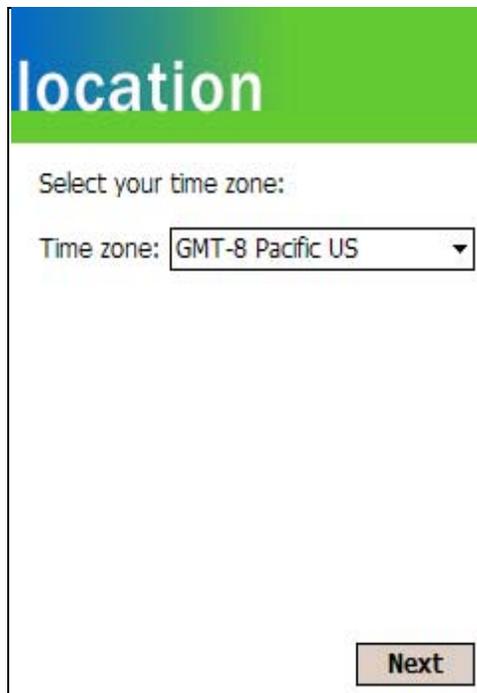

Use the drop-down list to select your time zone, and tap **Next**. This does not necessarily set the correct time; only the time zone. You set the time and date manually. See [Setting the Time and Date](#) on page -10.

After setting the time zone, you are finished with the initial setup of your Dolphin mobile computer. The system begins autoinstalling.

---

## Step 8. Autoinstall

For each program that loads, a status bar indicates that the program is loading. Autoinstall occurs after each hard reset. Do NOT touch the keyboard or the screen while programs are loading.


All configurations of the Dolphin 9500/9550 install HHP Demos and HHP Utilities. If the terminal is configured with a wireless radio, the appropriate radio drivers (\*.cabs) and utilities for each radio install.

After Autoinstall is complete, the terminal performs a soft reset automatically. When it finishes booting up after the soft reset, the Today screen appears; see [Today Screen](#) on page 4-2.

### Setting the Time and Date

You need to re-set the time and date after every hard reset of the terminal. It is a good idea to set the time and date now before you begin using the device.

To set the time and date, go to **Start > Settings > Systems tab > Clock** to set the date and time.

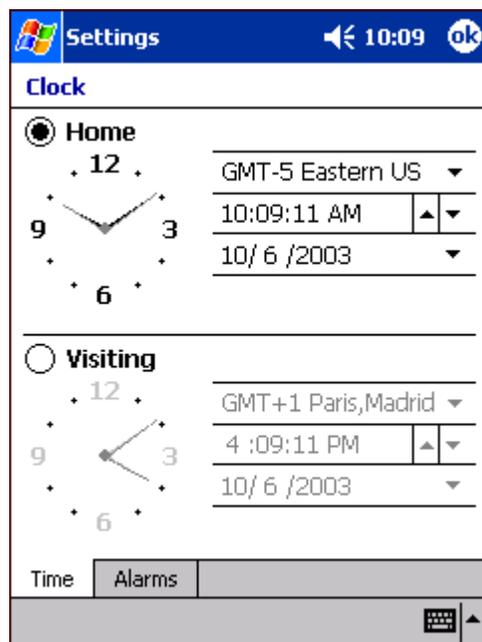

## Step 9. Verifying Operations with HHP Demos

The Dolphin 9500/9550 mobile computer comes loaded with HHP Demos you can use to verify imaging and decoding.

### Verify Imaging

The Image Demo enables you to use the imager to capture an image.

1. Go to **Start > HHP Demos > Image Demo**. The image demo opens.
2. Point the terminal at an object and press the SCAN key. A preview of the object appears on the terminal screen.
3. Release the SCAN key. The image is captured. By default, the image saves to the My Device folder as "imagedemo.jpg." To save to a different location, go to **File > Save As** and select a new location.
4. Press the ESC key to close the demo.

For more information about taking an image, see [Imager](#) on page 4-6.

---

## ***Verify Decoding***

The Scan Demo enables you to decode a sample bar code.

1. Go to **Start > HHP Demos > Scan Demo**.
2. Aim the terminal at a bar code and press the SCAN key. The scan LED lights red, and a green aimer beam projects out from the scanner.
3. When a good scan is obtained, the decode LED lights solid green and the terminal beeps. The bar code readout appears on the screen.
4. Press the ESC key to close the demo.

### **Sample Bar Codes**

You can use the following bar codes to verify decoding:

Sample 128



Code 128

Sample PDF417



PDF417 Test Message

For more information, see [Decoding](#) on page 4-6.

---

## ***Resetting the Terminal***

### ***Soft Reset (Warm Boot)***

You would perform a soft reset if the terminal fails to respond. The soft reset re-boots the device without losing RAM data.

1. Press and hold the Control (CTRL) and the Shift (SFT) keys for approximately five seconds.
2. The decode and scan LEDs flash for approximately three seconds as the terminal resets.
3. When the reset is complete, the Today screen displays.

### ***Hard Reset (Cold Boot)***

A hard reset resets the operating system, restores the terminal back to factory defaults, and resets the terminal after a bootloader, keyboard, and kernel upgrade.



*A hard reset erases all of the data stored in RAM memory and all RAM installed applications.*

1. Press and hold the Control (CTRL) and the Escape (ESC) keys for approximately five seconds.
2. The decode and scan LEDs light for approximately three seconds.
3. The terminal re-initializes (see page 2-8 for details).

### ***Suspend Mode***

To put the Dolphin terminal into suspend mode manually, press and hold the POWER key. The terminal goes into suspend mode automatically when the terminal is inactive for a programmed period of time. For more information, see [Power](#) on page 5-11.

To wake the Dolphin terminal from suspend mode, press the Power or SCAN key.

The Dolphin terminal also goes into suspend mode if you remove the main battery pack while the terminal is powered on. To wake the Dolphin terminal from suspend mode, simply install a fully charged battery. The terminal powers on.



*If the main battery and back-up battery are ever fully discharged of power, the terminal performs a hard reset when power is restored. The terminal will be restored to its original state. All data stored in RAM memory will be lost.*

## ***Dolphin 9500/9550 Overview***

### ***System Features***

#### **Processor**

The Dolphin 9500/9550 terminal is equipped with an Intel X-Scale 400MHz RISC microprocessor that runs on a 100 MHz RAM BUS, making it one of the most powerful Pocket PC platforms on the market.

#### **Operating System**

The Pocket PC platform is a compact, highly efficient, scalable operating system. Its open architecture facilitates development of applications for energy-efficient data collection devices like the Dolphin 9500/9550 terminal.

#### **Memory**

Main Board/IPSM - The standard memory configuration is 64 MB RAM and 32 MB non-volatile Flash.

Secure Digital Card (SD) - Dolphin 9500/9550 terminals contain one Secure Digital (SD) memory interface for additional application and data storage. You can order memory upgrades of 64 MB, 128 MB, and 256 MB. Each terminal contains an access door that makes the SD memory user-accessible. However, when that access door is fastened securely and properly, the terminal's environmental rating is preserved.

For more information about each kind of memory, see [Memory](#) on page 5-8.


#### **Wireless Radio Options**

For more information, see [Radio Options](#) on page 4-18.

---

## Front Panel Features

This section describes features on the Dolphin 9500/9550 terminal front panel.

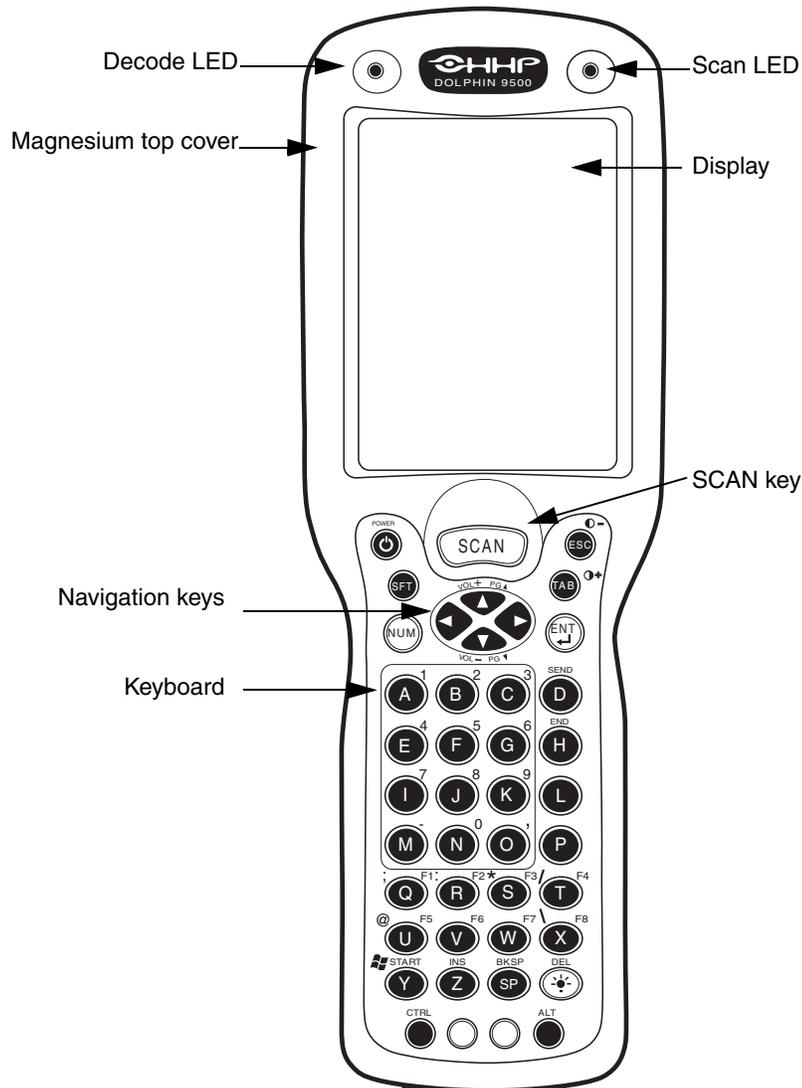

### LEDs

The two light emitting diodes (LEDs) located at the top of the LCD display flash and illuminate during resets and scanning/imaging. Both can be programmed by various software applications.

**Scan LED** - Located in the upper right corner, this LED lights red when you press the SCAN key.

**Decode LED** - Located in the upper left corner, this LED lights green when a scanned bar code is successfully decoded.

### Display

The Dolphin 9500/9550 terminals feature a 3.5" liquid crystal display (LCD) touch screen and is covered with an industrial, protective lens. The video graphic array (VGA) resolution is 1/4 (240 X 320 pixel). The touch screen is activated with the stylus (included with the terminal) or a finger. The LCD display is available in monochrome and color.

**Color** - The color LCD is 16 bits/pixel and uses active display or thin film transistor (TFT) technology. The backlight for the display illuminates when the screen is touched, but not when the Backlight key is pressed.

---

**Monochrome** - The monochrome LCD is grayscale and 4 bits/pixel. The backlight illuminates when the touch screen or the Backlight key is pressed. Monochrome units contain an additional contrast setting to enhance readability.

For more information about the Backlight, see [Adjusting the Backlight](#) on page 4-15.

## SCAN Key

The SCAN key is centrally located for easy access with the right or left hand. When pressed, the SCAN key activates the scanner/imager. The SCAN key also functions as an on or system wakeup control for the terminal.

## Navigation Keys

The centrally-located navigation keys enable you to move and position the cursor through software programs. The up and down arrows are programmed to perform specific functions when pressed in combination with the Blue and Red modifier keys.

## Keyboard

The Dolphin 9500/9550 series features three keyboard options: 35-key numeric/alpha keyboard, 43-key numeric/alpha keyboard, and 56-key full alpha/numeric keyboard. Each keyboard is backlit for easy viewing in various lighting conditions and contains centrally located keys for both right- and left-hand operation. The silver background of both the keys and the overlay enhances the readability of each.

The overlay of all three keyboards are color-coded to indicate the functions performed or characters typed when the color-coded key is pressed immediately after the Red or Blue Modifier key at the bottom of the keyboard.

For a complete overview of each keyboard, see [Using the Keyboards](#) on page 4-9.


---

## Back Panel Features

Because the back panel of the Dolphin 9500 and the Dolphin 9550 are different, each is featured in its own section.

### Dolphin 9500

The following graphic describes features on the back panel of the Dolphin 9500 terminal.

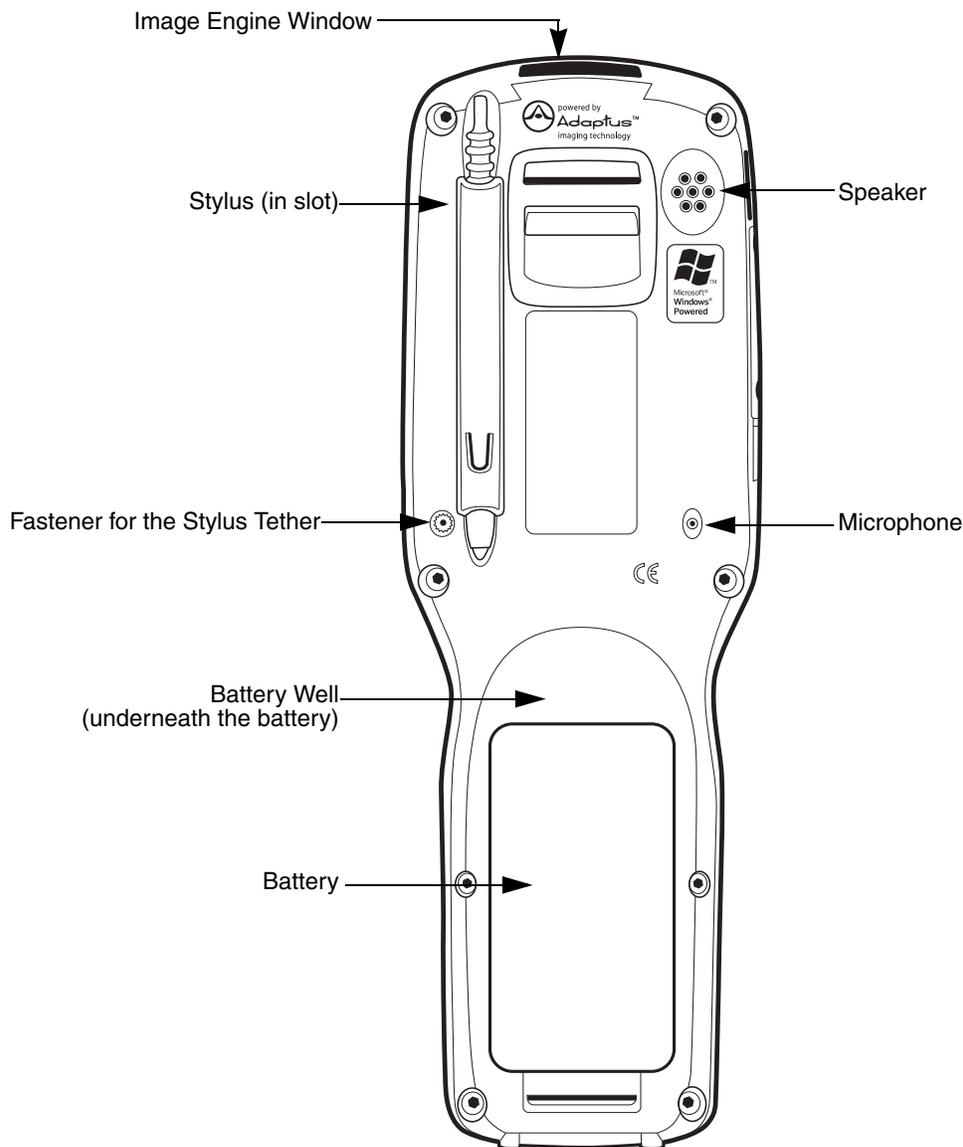

### Image Engine Window

Dolphin 9500/9550 terminals have an optional image engine that reads and decodes linear, stacked linear (PDF417), and 2D matrix bar code symbologies. With the latest CMOS-based technology, the engine works like a digital camera and enables digital image capture, signature capture, and reading of OCR characters.

Digital images taken with the Dolphin 9500/9550 terminal have a maximum image size of 640 x 480 pixels and may have up to a 256 grayscale image definition. File formats supported for image storage include Bitmap (.bmp), JPEG (.jpg) and Portable Network Graphics (.png).

For a frontal view of the Image Engine Window, see [Image Engine Window](#) on page 3-6.

---

## Speaker

The Dolphin 9500/9550 terminal has an integrated speaker that sounds audio signals as you scan bar code labels and enter data. The operating frequency range is 500Hz at 71 dB up to 80 dB. The speaker can also be used for playing sounds (e.g., WAV files).

## Hand Strap

The Dolphin 9500 has an adjustable, elastic hand strap to provide a comfortable, secure grip on the terminal. It is attached to the terminal with a clip on the bottom panel; see [Hand strap clip](#) on page 3-9. If desired, the strap may be adjusted or removed.

## Microphone

Dolphin 9500/9550 terminals feature an integrated microphone that provides audio input to the terminal.

## Battery/Battery Well

The Battery Well is a recessed area on the back of the Dolphin that holds the Li-Ion battery pack. For more information, see [Batteries](#) on page 3-10.

## Stylus and Fastener

The stylus is used to operate the touch screen. The back panel features this storage slot to hold the stylus when not in use. There is also a fastener on the back panel for stylus tethers.

Stylus tethers can be purchased separately to help you keep the stylus attached to the terminal when not in the slot to prevent loss. A stylus tether is a coiled elastic with one end to attach to the stylus and another to attach fasten to the back panel.


---

## ***Dolphin 9550***

This section describes the back panel of the Dolphin 9550. It contains the same features as the Dolphin 9500 described in the previous section with the additions of

- a pistol-grip handle to hold and maneuver the terminal with greater ease,
- a scanner/imager trigger on the handle that activates the scan, and
- rubber bumpers that enable the terminal to rest safely and securely when not in use.

The following is a graphic of the 9550 back panel.

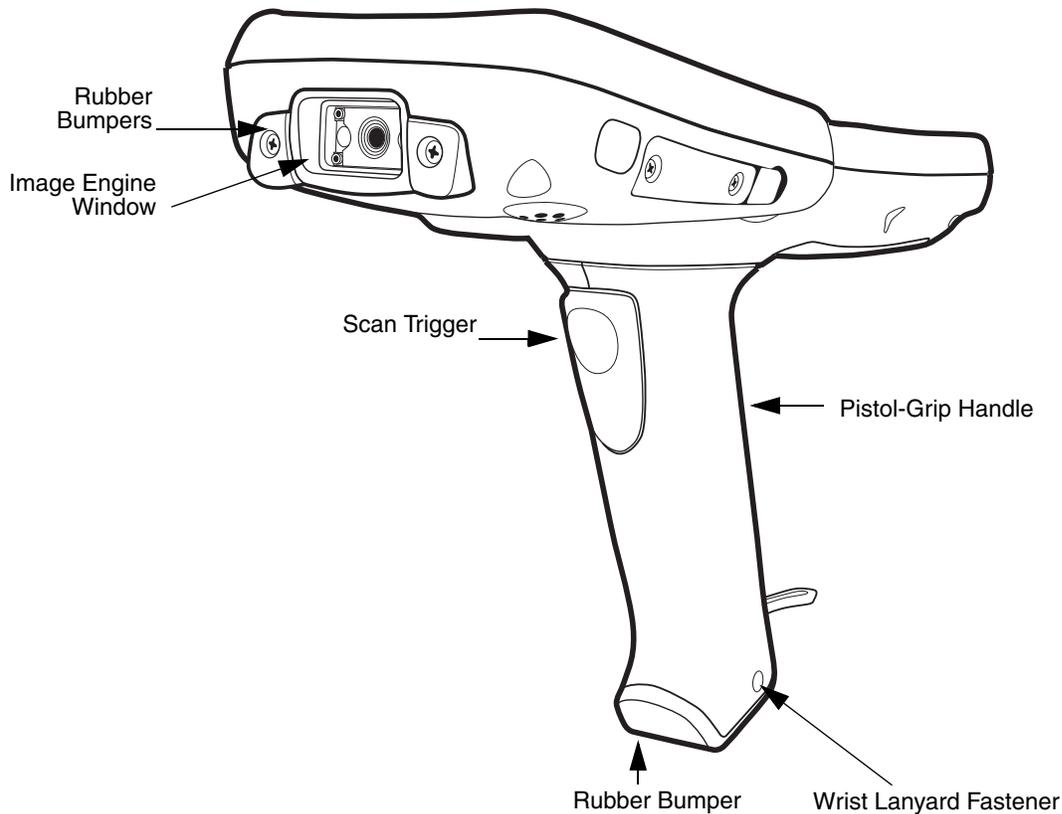

### **Rubber Bumpers**

The rubber bumpers enable the Dolphin 9550 to rest in a nose-down position on a flat surface. See [Rubber Bumpers](#) on page 3-7.

### **Image Engine Window**

This is the front view of the window. For more information, see [Image Engine Window](#) on page 3-4.

### **Scan Trigger**

The scan trigger provides comfortable scan activation.

### **Pistol Grip Handle**

The comfortable, ergonomic handle is integrated into the back panel to enhance the terminal's durability in rugged, real-world settings; the handle cannot be removed from the terminal. Designed specifically for rapid, high-volume scanning, the handle features rubber surface details to improve handle grip, comfort, and shock absorption.


---

## Wrist Lanyard Fastener

A wrist lanyard is available for Dolphin 9550 terminals that you can attach to the handle in this location an.

## Rubber Bumpers

The following graphic shows the Dolphin 9550 in a nose-down position, resting on its rubber bumpers.

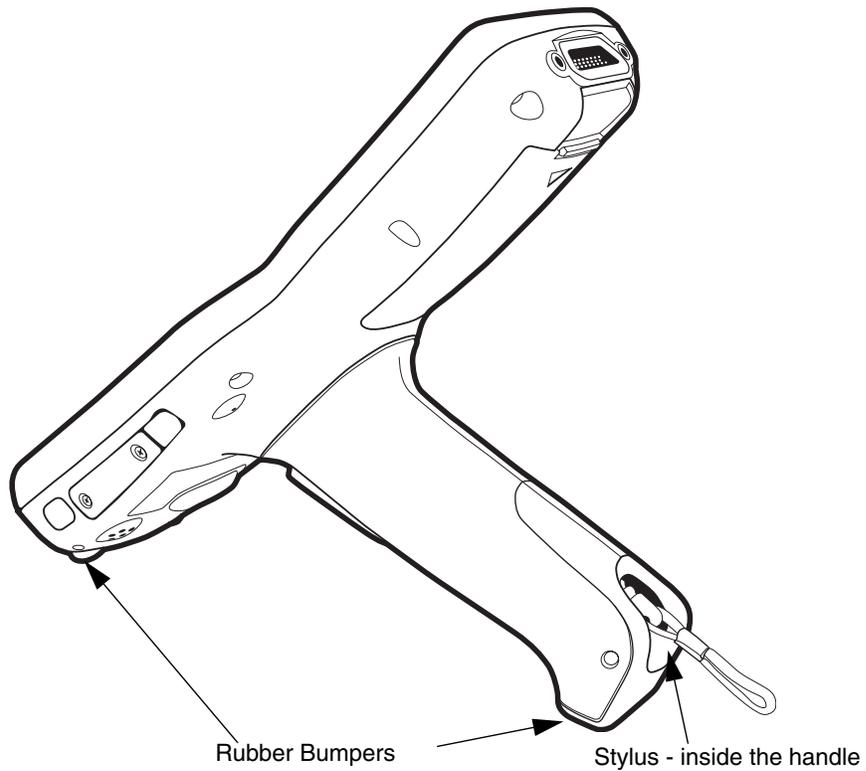


## Stylus

The stylus is used to operate the touch screen display. The Dolphin 9550 stores the stylus inside the pistol-grip handle.

---

## Side Panel Features

The following graphic shows the left, side panel.

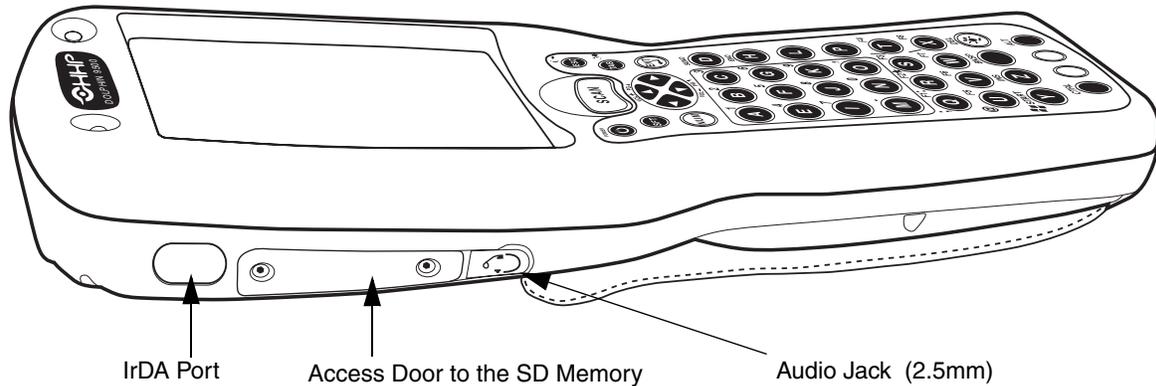

### IrDA Port

The Infrared Data Association or IrDA port communicates with IrDA-enabled devices such as PC's, printers, modems, or other Dolphin 9500/9550 terminals. The maximum speed is 115kbps.

### SD Memory

Dolphin 9500/9550 terminals contain an access door to an industry-standard SD memory interface. The secure digital access door seals the memory interface from moisture and particle intrusion and provides secure storage for read/write data. However, the user can open the access door manually to gain access to the SD.

You can custom-configure with SD memory of 64MB, 128MB, or 256MB. The SD memory interface does not support SDI/O or SDI/O devices.


### Audio Jack

Dolphin 9500/9550 terminals contain a 2.5mm audio jack for stereo audio playback. This jack serves as both a stereo headset interface or as a microphone (on the Dolphin 9500 GSM configuration). In both cases, you must use a 2.5mm plug.

---

## Bottom Panel Features

This following graphics describe the bottom panel of the Dolphin 9500/9550.

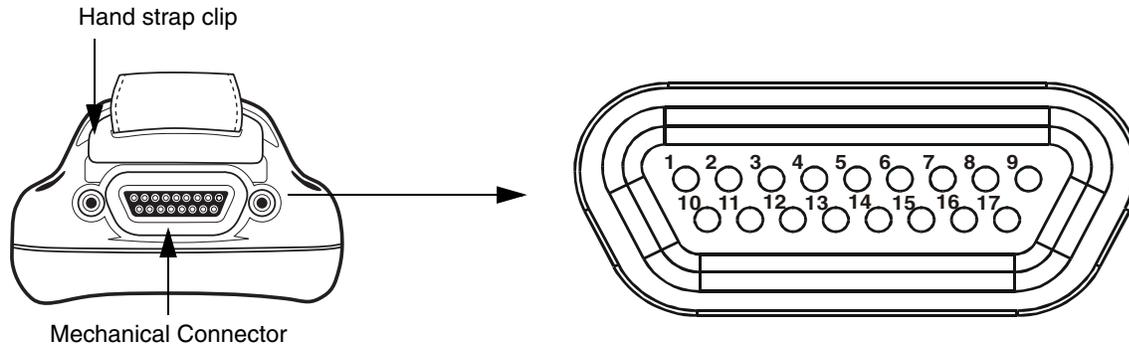

<u>Pin #</u>	<u>Description</u>
1	+USB
2	PWR
3	N / C
4	N / C
5	N / C
6	N / C
7	GND
8	5V OUT
9	DTR
10	-USB
11	USB DET
12	RI
13	DSR
14	RXD
15	RTS
16	TXD
17	CTS

Note: Signals referenced are for a DTE device.

### ***Mechanical Connector***

The bottom panel of the Dolphin 9500/9550 features a custom, industrial-grade connector with 17 pins. When seated in a Dolphin 9500 series peripheral, the terminal is powered, the main battery charged, and communication occurs via this connector. All Dolphin 9500 series peripherals are designed to work exclusively with this connector.

The 17-pin connector can communicate with Dolphin 9500 series peripherals via RS-232 or USB. For RS-232, the maximum communication speed is 115 Kbps with a seven baud rate setting. For USB, the communication speed is 12 Mbps. If the peripheral unit is connected to a PC, this connector also transmits data. This serial port is designated as COM port 1 on the PC.

The mechanical connector also provides power out (to peripheral devices) 5V at 500mA. This means that, with the proper HHP cable, the terminal can power another device.

---

## Batteries

The Dolphin 9500/9550 features intelligent battery technology. It is comprised of two types of battery power: the main battery pack installed in the back panel and the backup battery located inside the terminal. They are designed to work together to prevent data loss when the terminal is in use over long periods.

Both must be completely charged before using the Dolphin 9500/9550 for the first time.

### Main Battery Pack



*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

The 7.4V, 14.8 watt hour Li-Ion battery pack is the primary power source for the Dolphin. The Li-Ion battery is designed to operate in a temperature range of -10 to 50°C (14 to 122°F). They can be stored between -30 to 80°C (-22 to 176°F).

For the location of the Li-Ion battery on the terminal, see [Battery/Battery Well](#) on page 3-5.

### Charging Options

When the Li-ion battery is installed in the terminal:

- Place the terminal in a HomeBase (page 10-7) or Mobile Base (page 11-4) that is connected to an appropriate power supply.
- Connect a charging/communication cable to the mechanical connector, plug the cable into the AC adapter, and plug the adapter cable into a power outlet.
- Connect the terminal to the Mobile Charger and vehicle power port.

When the Li-ion battery is not installed in the terminal:

- Place the battery pack in the Dolphin QuadCharger - see [Charging Batteries in the QuadCharger](#) on page 13-3.
- Place the battery pack in the auxiliary battery well of the HomeBase - see page 10-7.

### Charging Time

The Li-ion battery pack requires four hours to charge completely.

### Internal Backup Battery

Located inside the terminal, the backup battery is a 3.6 Volt nickel metal hydride (NiMH) battery.

#### Purpose

The internal backup battery prevents the terminal from being reset if you need to remove and replace the main battery pack. It retains RAM data and allows the real-time clock to remain operational for up to 30 minutes when the main battery pack is removed.

#### Charging

The internal backup battery is powered by the main battery pack. Therefore, charging the internal backup battery requires that the main battery pack be installed in the terminal and the terminal be connected to a charging device.

The internal backup battery must be fully charged before using the terminal for the first time. The initial charge cycle takes approximately eight hours. After that, if the internal backup battery becomes fully discharged of power, it requires a minimum of 10 hours of charging time to function normally.

If the terminal is left without the main battery pack for more than 30 minutes, the internal backup battery needs to be recharged to function according to its specifications.

*Note:* Data and programs stored in flash memory are not lost even if the internal backup battery fails. However, you must reset the real-time clock using the Pocket PC time and date function; see [Setting the Time and Date](#) on page 2-10.

#### Guidelines

Follow these guidelines to maximize the life of the Dolphin's backup battery:

- Keep a charged Li-Ion battery pack in the Dolphin. The internal battery prematurely discharges if there is not at least a partially charged battery in the terminal.
- Keep the Dolphin connected to power when the terminal is not in use.

---

## ***Managing Battery Power***

Data and files saved on the Dolphin 9500/9550 terminal may be stored in RAM, so it is important to maintain a continuous power supply to the terminal. When the main battery pack becomes low, the Low Battery Charge icon appears in the notification tray at the top of the screen. The Critical icon appears when the battery is critically low. There is also a Low Battery icon that appears when the backup battery is low. For details about these icons, see [Status Icons](#) on page 4-25.

Letting the backup battery become fully discharged causes the terminal to lose all data in RAM. Therefore, you should keep a charged battery pack in the Dolphin at all times. The internal battery discharges prematurely if there is not at least a partially charged battery in the terminal. When you remove a battery pack, insert another charged battery pack in the Dolphin.

The battery status indicator displays in the notification tray when the battery is low or critically low. If there is no indicator, the battery is adequately charged.

If the main battery is low and the terminal is in suspend mode, pressing the SCAN or Power button does not wake the Dolphin 9500/9550 terminal; you must replace the discharged battery with a fully charged battery.

## ***Default Critical and Low Battery Points***

The Dolphin 9500/9550 is programmed to display warnings when the battery reaches critical and low battery points. There are two entries defined in the registry:

```
[HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Power]
```

```
“CriticalBatt”=dword:a
```

```
“LowBatt”=dword:19
```

### **“CriticalBatt”=dword:a**

This sets the Critical Battery point to 10 percent (a hex = 10 decimal). The critical battery setting is the point at which the customer is warned that the battery charge is very low. This warning is posted every 3 minutes until the situation is corrected.

### **“LowBatt”=dword:19**

This sets the Low battery point to 25 percent (19 hex = 25 decimal). The low battery setting is the point at which the user is notified that the battery is low. The user is notified only once for a low battery.


## ***Setting Critical and Low Battery Points***

Developers can reset these parameters in the registry from 0 (no warning) to 99 (would nearly always warn). Warnings do not appear when the terminal is on external power.

---

## Checking Battery Power

1. Go to **Start > Settings > System tab > Power**. The power settings screen appears displaying the charge status of both the installed Li-ion battery pack and the NiMH backup battery inside the terminal. This screen also displays the Suspend Mode settings for the terminal.

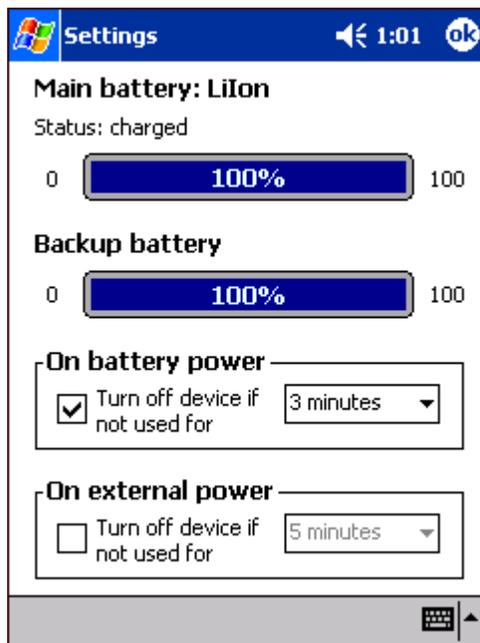

2. Select your time-out preferences from the drop-down lists. You can have both battery power and external power settings simultaneously.
3. Tap **OK** to save the changes and exit.

## Storing Batteries

To maintain optimal battery performance, follow the guidelines below when storing:

- Avoid storing batteries outside the specified range of -4 to 104° F (-20 to 40°C) or in extremely high humidity.
- For prolonged storage, do not keep batteries stored in a charger that is connected to a power source.

## Guidelines for Battery Use and Disposal

The following are general guidelines for the safe use and disposal of batteries:

- Use only the battery supplied, recommended, or approved by HHP.
- Replace a defective batteries immediately as it could damage the Dolphin terminal.
- Never throw a used battery in the trash. It contains heavy metals and should be recycled according to local guidelines.
- Don't short-circuit a battery or throw it into a fire. It can explode and cause severe personal injury.
- Excessive discharge damages a battery. Recharge the battery when your terminal indicates low battery power.
- Although your battery can be recharged many times, it will eventually be depleted. Replace it after the battery is unable to hold an adequate charge.
- If you are not sure the battery or charger is working properly, please send it to HHP or an authorized HHP service center, for inspection.

## Dolphin 9500/9550 Technical Specifications

<b>System Architecture</b>	
<b>Processor:</b>	Intel X-Scale PXA255 400MHz
<b>Development Environment:</b>	Dolphin SDK for Pocket PC 2002 supports Embedded VB or C++ Dolphin .NET SDK for Pocket PC 2002 supports Visual Studio.NET(VB.NET and C#.NET)
<b>Operating Platform:</b>	Pocket PC 2002 Professional Edition
<b>Third-Party Software:</b>	Support for Connect Terminal Emulation software (TNVT, 3270, 5250) and Java Virtual Machine (JVM) runtime
<b>Memory:</b>	64MB RAM x 32MB non-volatile Flash
<b>Data Inputs</b>	
<b>Imager/Scanner:</b>	See <a href="#">Image Engine Options</a> on page 2-2.
<b>1D Symbologies:</b>	See <a href="#">Bar Code Symbologies Supported</a> on page 2-5.
<b>2D Symbologies:</b>	See <a href="#">Bar Code Symbologies Supported</a> on page 2-5.
<b>Composite Codes</b>	See <a href="#">Bar Code Symbologies Supported</a> on page 2-5.
<b>OCR Fonts:</b>	See <a href="#">Bar Code Symbologies Supported</a> on page 2-5.
<b>Three Keyboard Options:</b>	35-key numeric-shifted alpha, 43-key alpha-shifted numeric, and 56-key full alpha/numeric See <a href="#">Using the Keyboards</a> on page 4-9.
<b>Data Outputs</b>	
<b>Display:</b>	See <a href="#">Display</a> on page 3-2.
<b>I/O Ports:</b>	Custom, industrial-grade, mechanical connector supports <ul style="list-style-type: none"> <li>• USB communications at 12Mbps</li> <li>• Serial RS-232 communication up to 115Kbps</li> <li>• Charging via peripheral cradles or AC adapter cables</li> </ul> Integrated IrDA port Speaker Microphone
<b>Mass Storage:</b>	User-accessible Secure Digital (SD) memory interface
<b>Wireless Radio Options</b>	
<b>WLAN:</b>	IEEE 802.11b DSSS Authentication Methodologies: LEAP, MD5, TLS, TTLS, and PEAP
<b>WWAN: (9500 only)</b>	GSM/GPRS Tri-band (900, 1800, 1900 MHz) radio with accessible SIM card interface
<b>WPAN:</b>	Bluetooth radio
<b>Physical</b>	
<b>Dimensions:</b>	9.6"L x 3.45"W x 1.66"D at display (24.53 x 8.76 x 4.23 cm), 2.7"W x 1.5"D at grip (6.9 x 3.8 cm)

## Dolphin 9500/9550 Technical Specifications

<b>Weight:</b>	<b>9500 Terminal –</b> Batch: 19.7 oz. (558 gm) WLAN: 20.2 oz. (573 gm) WPAN: 20 oz. (567 gm) WLAN/WPAN: 20.3 oz. (576 gm) <b>9550 Terminal –</b> Batch: 23.4 oz. (663 gm) WLAN: 23.9 oz. (677.5 gm)
<b>Operating Temperature:</b>	14 to 122°F (-10°C to 55°C) The terminal can operate in temperatures lower than -20°C with potential degradation in performance depending on the application
<b>Storage Temperature:</b>	-22 to 176°F (-30°C to 80°C)
<b>Humidity:</b>	95% humidity, non-condensing
<b>Electrical Static Discharge:</b>	15 kv on all surfaces
<b>Impact Resistance:</b>	Withstands multiple 5ft. (1.5m) drops onto concrete
<b>Environmental Resistance:</b>	Independently certified to meet IP64 standards for moisture and particle resistance
<b>Power:</b>	Lithium-Ion battery technology – 7.4V, 14.8 watt-hour main battery with hot-swappable design for fast replacement in the field
<b>Other:</b>	Integrated stylus with optional tether and adjustable, removable hand strap
<b>Peripherals/Accessories</b>	
<b>Dolphin HomeBase</b>	Charging/communications cradle with auxiliary battery well. Data transfer via RS-232 serial or USB ports.
<b>Dolphin Mobile Base</b>	Mobile charging/communication cradle. Data transfer via RS-232 serial. Power out 5 volts for peripheral devices.
<b>Dolphin QuadCharger</b>	Four-slot battery charger that charges four batteries in under four hours. One slot doubles as a battery analyzer.
<b>Dolphin Mobile Charger</b>	Charges a Dolphin terminal by plugging into a vehicle cigarette lighter/power port.
<b>Dolphin Net Base</b>	Four-slot charging/communication cradle designed for Ethernet-based communications.
<b>Dolphin ChargeBase</b>	Four-slot charging cradle that holds, powers, and charges a terminal in each slot.
<b>Charging/Communication cables</b>	USB or serial cables that charge and communicate with the terminal directly—without a cradle.
<b>Li-Ion Battery Pack</b>	7.4V, 14.8 watt hour Li-ion rechargeable main battery for the Dolphin.
<b>Regulatory Approvals</b>	
<b>FCC-CE-Radio Country:</b>	US/Canada, R&TTE

## Using the Dolphin 9500/9550 Mobile Computer

### Entering Data

To enter data, you may:

- Use the 35-key, 43-key, or 56-key keyboards
- Capture images or scan bar code data into data fields
- Use the Soft Input Panel (SIP) to enter text
- Write directly on the screen
- Draw pictures on the screen
- Use Microsoft® ActiveSync® to synchronize or copy information from your desktop computer. For more information on ActiveSync, see ActiveSync Help on your desktop computer. For information on communicating with ActiveSync, see [Using ActiveSync](#) on page 6-2.

### Touch Screen

HHP recommends using screen protectors to protect the touch screen; especially when used with applications that require high-volume interfacing with the touch screen. Screen protectors help prevent damage to the touch screen display and are easily installed. Screen protectors can be purchased at any major computer retail store or directly from HHP.




*For touch screen input, use the included stylus or your finger. The method you choose depends on which one is appropriate for your application. While there is a great deal of variation in different applications, for buttons or icons that are close together, you generally achieve greater accuracy with the stylus. Use of other objects, such as paper clips, pencils, or ink pens can damage the input panel and will void the warranty.*

---

## Today Screen


When the terminal powers one for the first time, you see the Today screen. You can also display it by tapping **Start** and then **Today**. On the Today screen, you can see at a glance important information for the day.

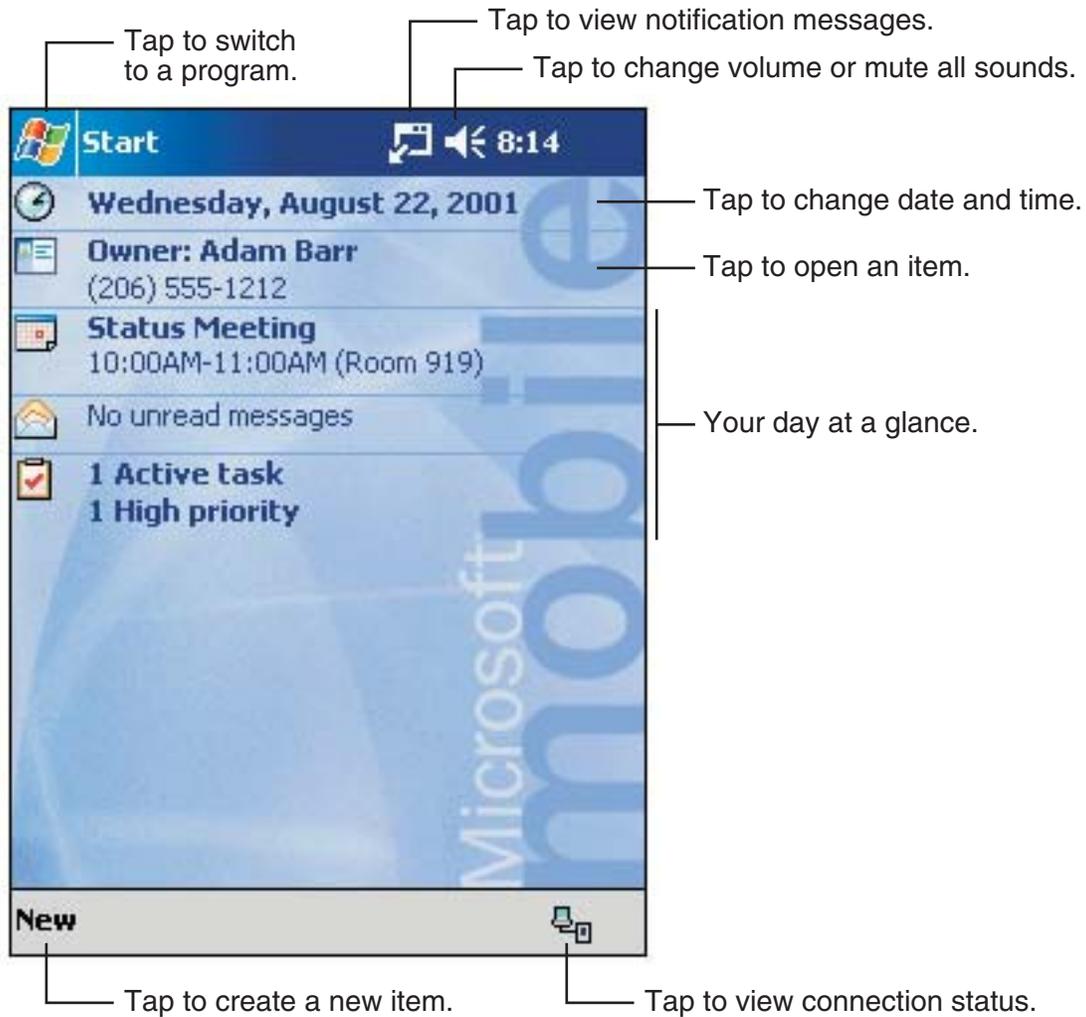

---


## Navigation Bar

The navigation bar is located at the top of the screen. It displays the active program and current time, and allows you to switch to programs and close screens.

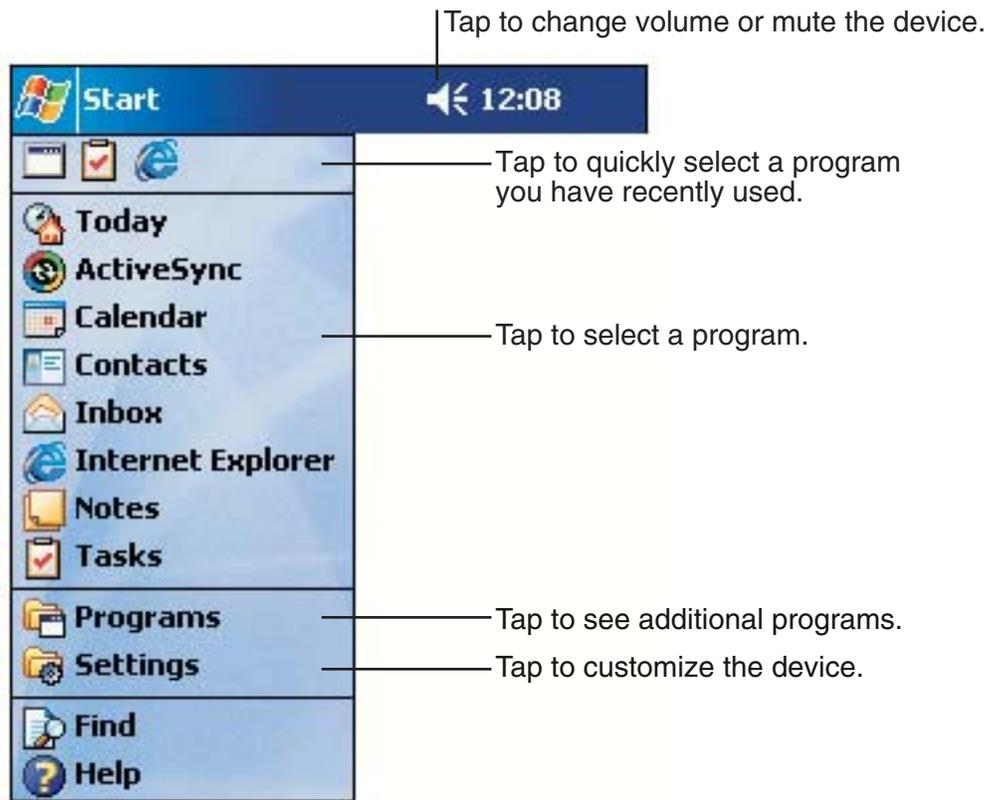

## Command Bar


Use the command bar at the bottom of the screen to perform tasks in programs. The command bar includes menu names, buttons, and the Input Panel button. To create a new item in the current program, tap **New**. To see the name of a button, tap and hold the stylus on the button. Drag the stylus off the button so that the command is not carried out.

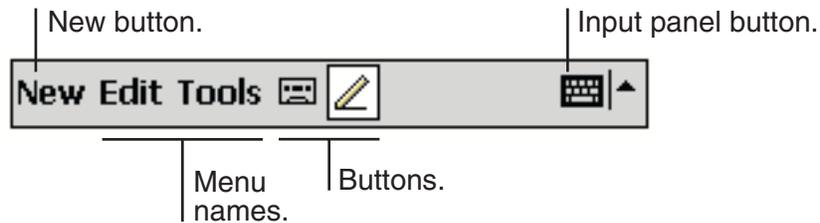

---

## Pop-Up Menus

With pop-up menus, you can quickly choose an action for an item. For example, you can use the pop-up menu in the contact list to quickly delete a contact, make a copy of a contact, or send an e-mail message to a contact. The actions in the pop-up menus vary from program to program. To access a pop-up menu, tap and hold the stylus on the item name of the action you want to perform the action. When the menu appears, lift the stylus, and tap the action you want to perform. Or tap anywhere outside the menu to close the menu without performing an action.

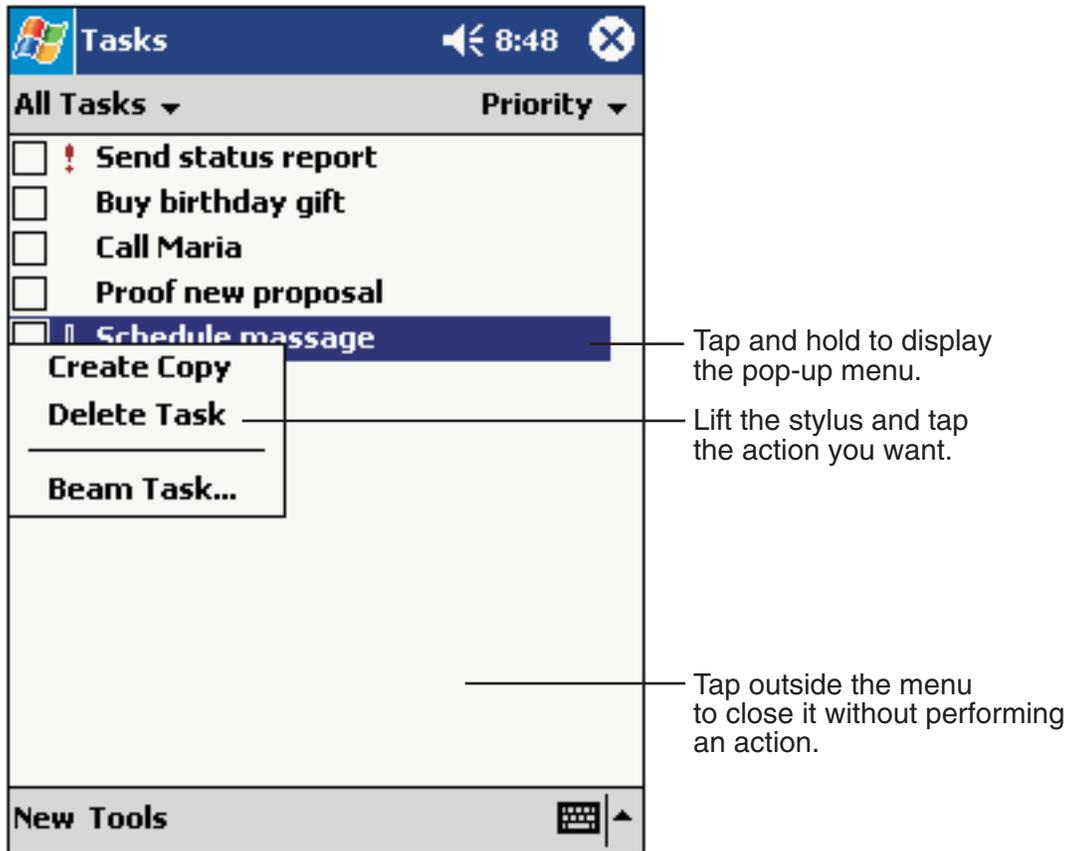

---

## Selecting Programs

To select a program, tap **Start > Programs**, then the program name.



*Note:* Some programs have abbreviated labels for check boxes and drop-down lists. To see the full spelling of an abbreviated label, tap and hold the stylus on the label. Drag the stylus off the label so that the command is not carried out.

---

## *Imager*

The terminal houses a compact image engine that instantly reads all popular 1D and 2D bar codes and supports omni-directional aiming and decoding for greater flexibility in real-world settings. The image engine can also capture digital images, such as signatures and pictures of damaged inventory. Images are saved in industry-standard file formats.

## *Decoding*

The terminal supports two types of image decoding for use in various bar code reading and imaging applications: full-area imaging and Advanced Linear Decoding (ALD).

### **Full-area Imaging**


Full-area imaging provides omni-directional reading of linear and non-linear 1D and 2D bar codes, OCR, signature capture, and picture taking. When reading all bar code types using full-area imaging, a positive read can be obtained from many positions; see [Scanning Position Options](#) on page 4-7. To achieve the best read, the aiming beam should be centered horizontally across the bar code.

### **ALD**

ALD provides fast reading of linear and stacked linear bar codes. To achieve a positive read when reading linear 1D and PDF417 bar codes, the green aiming beam should be centered horizontally across the bar code. When ALD is enabled, the reader does not read matrix or postal codes.

### *To Decode a Bar Code*

1. Point the Dolphin 9500/9550 terminal directly at the bar code. The imager faces straight out the top panel. The aiming beam should be oriented in line with the bar code to achieve optimal decoding. A range of 4-10 inches (10-25 cm) from the bar code is recommended.
2. Project the imager's green aiming beam by:
  - Pressing and holding the SCAN key on both the 9500 and 9550.
  - Pressing and holding the Scan Trigger on the 9550.
3. The scan LED lights red.

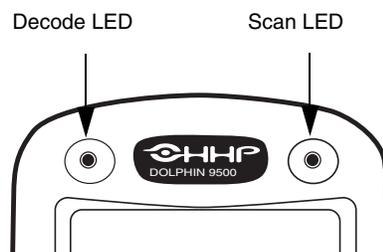

4. Center the aiming beam over the bar code.
5. When the bar code is successfully decoded, the decode LED lights green and the terminal beeps.
6. The bar code information is entered into the application in use.


---

## Scanning Position Options


The aiming beam is smaller when the terminal is held closer to the code and larger when it is farther from the code. Symbologies with smaller bars or elements (mil size) should be read closer to the unit. Symbologies with larger bars or elements (mil size) should be read farther from the unit.

The following chart displays the imager's aiming positions:

Linear bar code

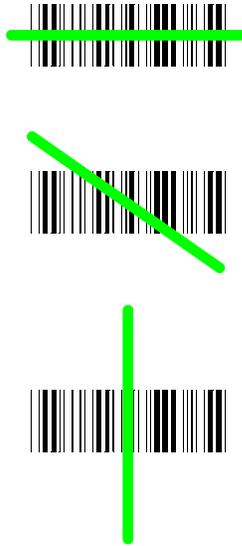

2D Matrix symbol

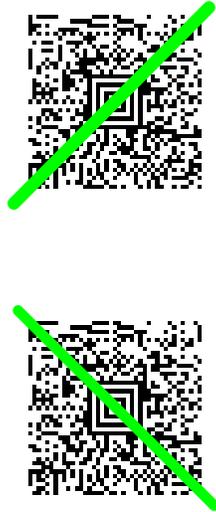

---

## *Capturing Images*

The image-capture process is an intuitive, split-second operation for experienced users. By following the basic guidelines, new users can easily develop their own technique and, with practice, quickly learn to adapt it to different application environments.

### **Image Preview**

When the imaging process is initiated, the Dolphin 9500/9550 touch screen displays a preview of the object. This is a live video image of what the imager is currently viewing. It has a slightly degraded appearance compared to the captured image. This is normal.

### **The Scan Key**

The Scan key captures images on both the Dolphin 9500 and the Dolphin 9550 terminals. It is the only way to capture an image on the 9500, while on the 9550, you can also use the scan trigger on the pistol-grip handle.

### **Image Files**

The terminal is capable of saving images in a number of industry-standard file formats such as \*.bmp, \*.jpg and \*.png. The default file format for images is a grayscale \*.jpg.

The image quality and related file size are determined by the data compression method used by the software application used to take images. The average size of the image file is approximately 4-8K. However, the size of the image depends on the content of the image - the more complex the content, the larger the file size.

For the highest quality, take grayscale images.

## *Taking an Image*

The following steps are basic guidelines for taking images:

1. Point the Dolphin 9500/9550 terminal directly at the object. The imager points straight out the top panel.
2. To preview the image:
  - Press and hold the **Scan** key on both the 9500 and 9550.
  - Press and hold the Scan Trigger on the 9550.
3. The touch screen displays a preview of the object, and the decode and scan LEDs light red.
4. Adjust the terminal's position until the object appears on the screen the way you want it to appear in the image.
5. Hold the terminal still and release the **Scan** key or Scan Trigger. The scan and decode LEDs flash red, the touch screen flashes, and the captured image appears on the screen.



6. Unless otherwise specified by the application in use, the image is saved to the My Device folder (Start > Programs > File Explorer > My Device).

### **Uploading Images**

Image files can be uploaded to a host PC via Microsoft ActiveSync and a Dolphin communication peripheral or your wireless radio connection.

---

## Using the Keyboards


The Dolphin 9500/9550 series features three keyboard options: 35-key numeric/alpha keyboard, 43-key alpha/numeric keyboard, and 56-key full alpha/numeric keyboard. Each keyboard is backlit for easy viewing in various lighting conditions and contains centrally located keys for both right- and left-hand operation. The silver background of both the keys and the overlay enhances the readability of each.

The overlay of all three keyboards are color-coded to indicate the functions performed or characters typed when the color-coded key is pressed, immediately after the Red or Blue Modifier key at the bottom of the keyboard. In addition to the alpha and numeric keys, each keyboard contains function, navigation and modifier keys.


**35-key numeric/alpha keyboard**



**43-key alpha/numeric keyboard**

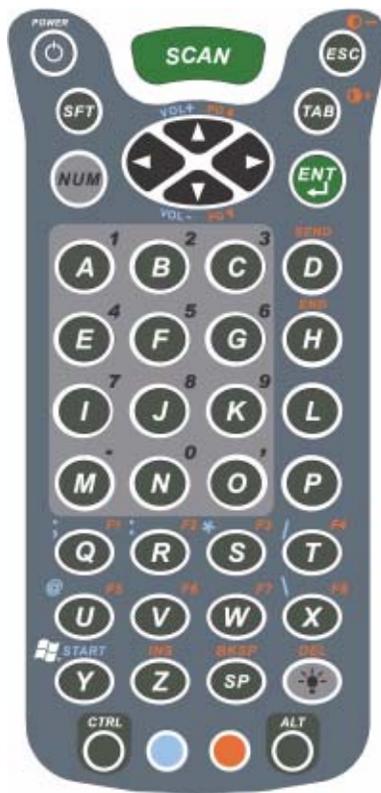

**56-key full alpha/numeric keyboard**

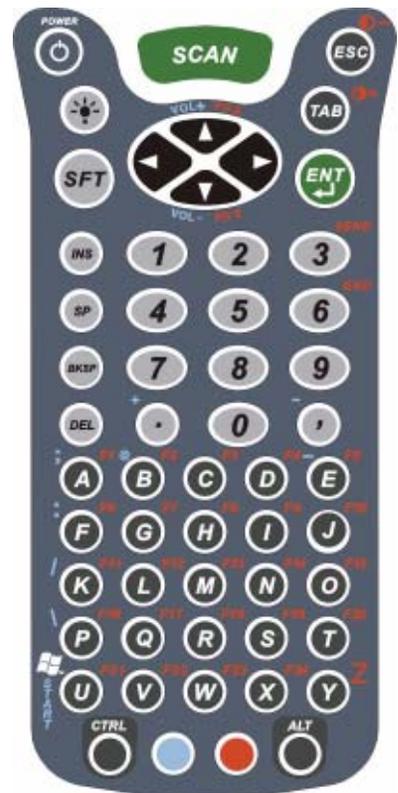

## Using the Function Keys

Name	Key	Function
<b>Backlight</b>		By default, the Backlight key turns the keyboard backlight on and off. See <a href="#">Adjusting the Backlight</a> on page 4-15.
<b>Backspace (BKSP)</b>		This key appears on both the 35- and 56-key keyboards.  The BKSP key moves the cursor back one space each time the key is pressed. If you are typing text, it deletes the previous character each time it is pressed.  On the 43-key keyboard, the backspace is a shifted function; press SFT + SP to backspace. To delete a single character, press Red key + SP. To delete multiple characters, press Red key + SP and hold down the SP key.
<b>Delete (DEL)</b>		This key appears on both the 35- and 56-keyboard. The Delete key deletes the next character forward each time the key is pressed.  On the 43-key keyboard, delete is a shifted function; press SFT + the Backlight key to delete.
<b>Enter (ENT)</b>		The Enter key confirms data entry.
<b>Escape (ESC)</b>		The Escape key performs a cancel action.
<b>Power Key</b>		The Power key puts the terminal into and wakes the terminal from suspend mode.
<b>SCAN Key</b>		The SCAN key activates the scan on both Dolphin 9500/9550 terminals. It also “wakes” the terminals from sleep mode. Its position allows convenient one-handed image-taking and/or bar code decoding.
<b>Space (SP)</b>		The Space key moves the cursor one space.
<b>Tab</b>		The Tab key moves the cursor to the next tab stop or the next control (on a form).

## Using the Navigation Keys


Located in the center of each keyboard for easy access with either hand, the navigation keys enable you to navigate the cursor through an application screen.

Press	To ...
	Move the cursor up one row or line.
	Move the cursor down one row or line.
	Move the cursor one character to the right.
	Move the cursor one character to the left.

The up and down arrows can be used for page up and page down commands when pressed in combination with the red modifier key. Other functionality varies according to the application in use.

### Using the Modifier Keys


All three versions of the Dolphin 9500/9550 keyboard feature the standard PC keyboard modifier keys, Shift (SFT), Alt, and Control (CTRL) as well as Blue and Red modifier keys.

Name & Key	Function
<b>Shift (SFT)</b>  	The SFT key modifies only the next key pressed; it must be pressed before each key you wish to modify. SFT toggles the keyboard between uppercase alphabet mode and lowercase alphabet mode. Use SFT toggle Caps Lock on and off by double-tapping it or by pressing SFT + the Red modifier key. When Caps Lock is toggled on, characters are uppercase; when toggled off, characters are lowercase.
 Blue Red	The CTRL, ALT, and Blue and Red Modifier keys are located along the bottom of each keyboard.
<b>CTRL and ALT</b>	Functions of the ALT and CTRL keys depend on the software application in use and the keys pressed in combination with each.
<b>Blue and Red</b>	The blue and red keys are used in combination with other keys to type special characters and perform system functions. Each key modifies only the next key pressed.  The overlay of each keyboard is color-coded to indicate the character typed or function performed when specific keys are pressed immediately after the blue or red modifier key.

---

### 35-Key Numeric/Alpha Keyboard

The following graphic displays the 35-key numeric/alpha keyboard.

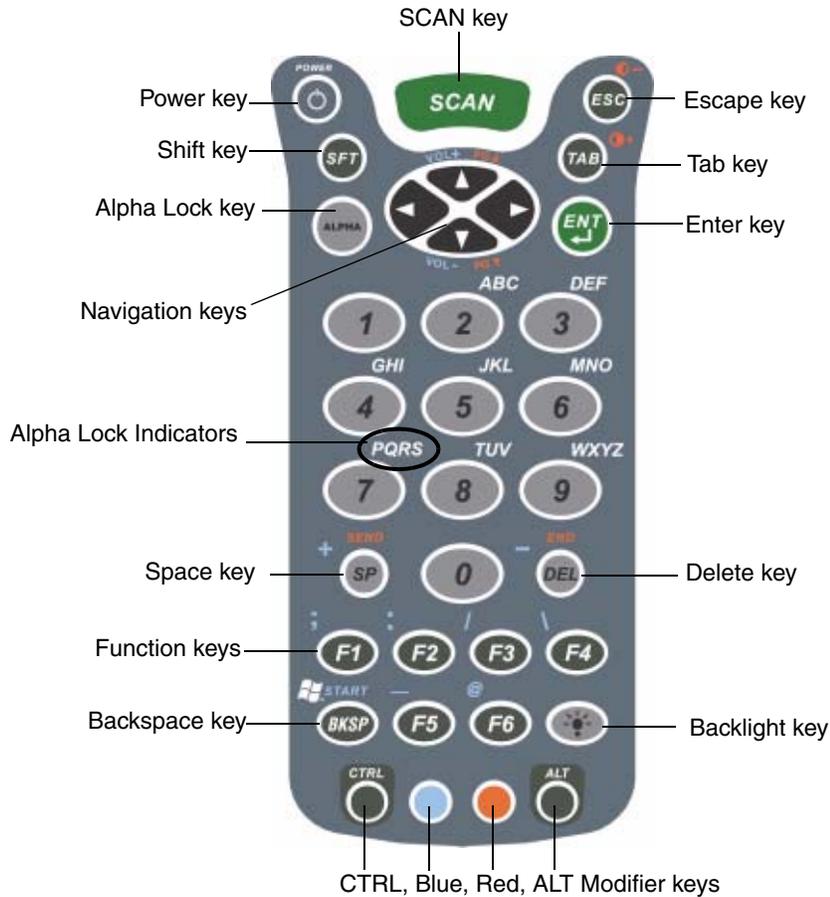

#### Alpha Lock Key (ALPHA)


Because the 35-key keyboard defaults to numeric mode, the Alpha Lock key appears only on the 35-key keyboard. The Alpha Lock key enables you to toggle between the numeric and alpha modes. Numeric mode is when you type numbers with the number keys. Alpha mode is when you type letters with the number keys.

The letters on the overlay above specific number keys indicate what letter will be typed when you press that key in alpha mode.

---

## 43-Key Alpha/Numeric Keyboard

The following graphic displays the 43-key alpha/numeric keyboard.

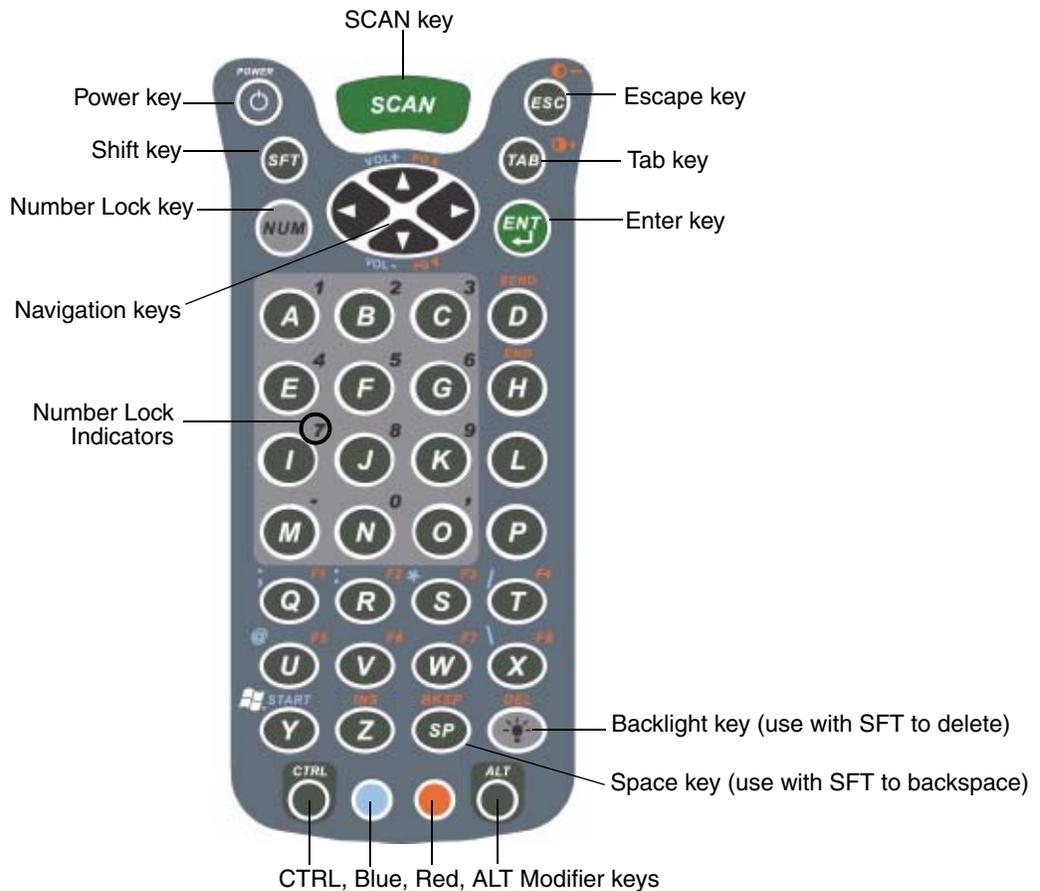

### Number Lock (NUM)

Because the 43-key keyboard defaults to alpha mode, the Number Lock key appears only on the 43-key keyboard. The Number Lock key enables you to toggle between the alpha and numeric modes. alpha mode is when you type letters with the letter keys. Numeric mode is when you type numbers with the letter keys.

The numbers on the overlay above specific letter keys indicate what number will be typed when you press that key in Numeric mode.

---

## 56-Key Full Alpha/Numeric Keyboard

The following graphic displays the 56-key alpha/numeric keyboard.



### Key Combinations

There are keyboard combinations for specific functions and special characters on each keyboard. For charts of the key combinations associated with each keyboard layout, see the Appendix A of the Dolphin 9500/9550 User's Guide.

---

## Adjusting the Backlight

Both the keyboard and the display are backlit to enable better viewing in low-light conditions. All keyboards contains a Backlight key that toggles the backlight on and off; see [Backlight](#) on page 4-10.

**Keyboard** By default, the Backlight key turns the keyboard backlight on and off for both color display and monochrome terminals.

**Display** Backlight functionality differs for color and monochrome displays.

### Color Display

The backlight for the color display is user-defined.


Go to **Start > Settings > System tab > Backlight**.  
The Backlight screen appears.

The graphic on the right displays the default backlight settings for color displays.

Adjust the settings as needed with the options available. Use the slider to adjust intensity.

Click **OK** to save any changes.

The display backlight functions according to the settings saved here.

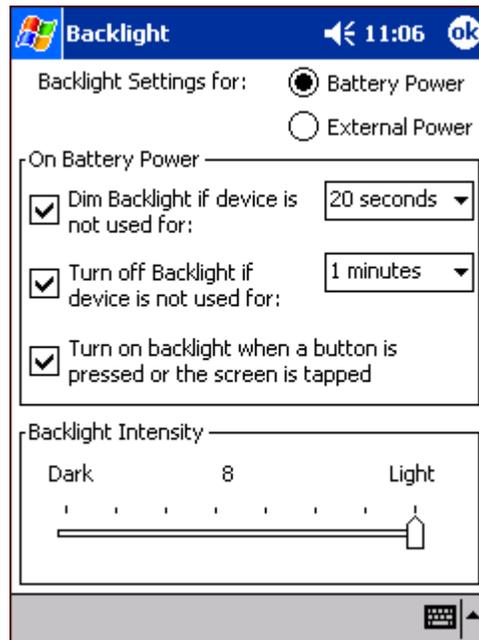


### Monochrome Display

The backlight for monochrome displays turns on and off when you press the Backlight key, but not when you tap the screen. You can adjust the contrast using the keyboard or the system settings.

#### Using the Keyboard

Press and hold the

- Red Modifier key + ESC to decrease the contrast
- Red Modifier key + TAB to increase the contrast



All three keyboards have red indicators over each key to indicate which key to press in combination with the red modifier key to adjust the contrast.


---

## Using the System Settings

Tap **Start** > **Settings** > **System** tab > **Contrast**.  
The current settings are displayed.

Use the slider to adjust the contrast to the desired setting.

Tap **OK** to save adjustments.

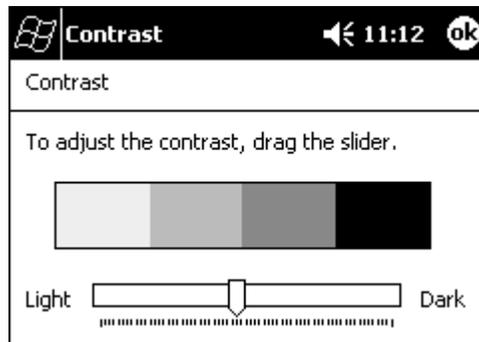

---

## *Communication Media Options*

### **Mechanical Connector**

The 17-pin, industrial-grade, mechanical connector on the bottom panel is designed to work only with HHP sold/manufactured communication and charging peripherals. Via these peripherals, the connector supports USB and RS-232 communications, enabling the user to connect the Dolphin 9500/9550 terminal to external devices such as scanners and printers. The connector also provides power out 5V at 500mA, which means that, with the proper HHP cable, the terminal can power another device.

For more information about the connector, see [Mechanical Connector](#) on page 3-9.

### **IrDA Port**

The IrDA port enables the Dolphin 9500/9550 to transmit data via pulses of light to and from other IrDA-compliant devices, such as printers and PCs or to other Dolphin 9500/9550 terminals.

### **802.11b Radio**

The Dolphin 9500/9550 may be equipped with a WiFi®-compliant, interoperable 2.4 GHz 802.11b direct sequence spread spectrum wireless local area network (WLAN) radio.

### **Bluetooth Radio**

The Dolphin 9500/9550 may be equipped with a Bluetooth wireless personal area network (WPAN) radio.

## *Software Communication Programs*

### **Microsoft® ActiveSync v3.7®**

Microsoft ActiveSync is a tool that enables Pocket PC devices, such as the Dolphin 9500/9550, to exchange and synchronize application data with a desktop computer.

For more information, see [Communications](#) on page 6-1.

### **RAS**

Short for Remote Access Services, RAS is a feature built into Windows NT that enables users to log into an NT-based LAN using a modem, X.25 connection or WAN link. RAS is fully supported and allows the use of PPP or SLIP connections for network connectivity.

---

## ***Radio Options***

Dolphin 9500/9550 terminals can be configured with one or a combination of the following radios:

- 802.11b
- Bluetooth

Dolphin 9500/9550 terminals can be configured with more than one radio. Bluetooth and 802.11b radios are co-operational, which means that you can operate one or both radios simultaneously.

### ***Radio Driver Installation***

Radio drivers (usually \*.cab files) install during the autoinstall whenever the mobile computer is initialized; when first turned on or after a hard reset. Only the appropriate drivers for your terminal's radio configuration install. For example, if your terminal is configured only with an 802.11b radio, only the driver for that radio installs. For more information, see [Autoinstall](#) on page 2-10.

When a single radio installs, its radio driver is powered up automatically after initialization is complete. In general, when more than one radio installs, the terminal powers up the 802.11b radio.

### ***The Radio Manager***

The Radio Manager is a control panel applet through which the radio power driver controls the radio state. It enables you to choose which radios on the terminal are powered up. When powered up, the radio is transmitting, when powered down, the radio is not transmitting.

#### **Single Radio Configuration**

If your terminal contains a single radio module and its associated driver is installed, the radio operates by itself without any special configuration made to the terminal.

#### **Multiple Radio Configuration**

Configuration of simultaneous radio operation is done during the manufacturing process according to FCC regulations. If multiple radio modules are installed in your terminal, simultaneous operation must be configured before the radio power driver allows it. In other words, verify which radio or radios are powered up or down before you begin using the radio or radio combination.

#### **Multiple Radio Operation**

The 802.11b radio can operate by itself or simultaneously with Bluetooth radios.

### ***Powering Up a Radio***

#### **Requirements**

To successfully power up a radio, both the hardware module and the software driver must be installed on the terminal. If the module is present, the radio appears in the Radio Manager. However if the driver is not installed, you cannot successfully power up the radio. Attempting to do so produces an error in the Status field that tells you that the driver is not installed.

---

## To Power Up a Radio or Radio Combination

1. Open the Radio Manager by going to **Start > Settings > System tab > Radio Manager**. The Radio Manager appears identifying which radio modules are installed. The highlighted entry is the radio mode that is currently enabled; its Status should be Ready.



### Radio Modes box

The Radio Modes box displays the radio hardware modules currently installed on the terminal. For example, if a working Bluetooth module is installed, the box contains the line Bluetooth Only whether or not that radio is currently powered up.

### Status field

The Status field provides feedback on the state of the radio. When it reads “Ready,” the radio selected in the Radio Modes box is powered up. The Status field displays error messages when a radio cannot be enabled.

2. Select the radio in the Radio Modes list and tap **Apply**.

The radio drivers are powered down and powered up in the proper sequence. For example, if the radio powered up is Bluetooth Only and you try to switch to 802.11b Only, after **Apply** is tapped, the Radio Manager powers down the Bluetooth radio first, then powers up the 802.11b radio.

If an error occurs during this process, the radio mode change is abandoned. The resulting radio state is the status of the radios at the time the error occurred.

## To Power Down Radios

Radio drivers are automatically powered down if the radio or radio combination that is currently powered up requires it. To power down all radios, select **None** and tap **Apply**.

For more information about 802.11b radios, see [Wireless LAN Communications with 802.11b](#) on page 7-1.


For more information about Bluetooth radios, see [Wireless PAN Communications with Bluetooth](#) on page 8-1.

---

## Entering Text Using the Input Panel

Use the input panel to enter information in any program on the Dolphin mobile computer. You can either type on the soft keyboard or write on the touch screen using Letter Recognizer or Block Recognizer. In either case, the characters appear as typed text on the screen.

To show or hide the input panel, tap the Input Panel button. Tap the arrow next to the Input Panel button to see your choices.

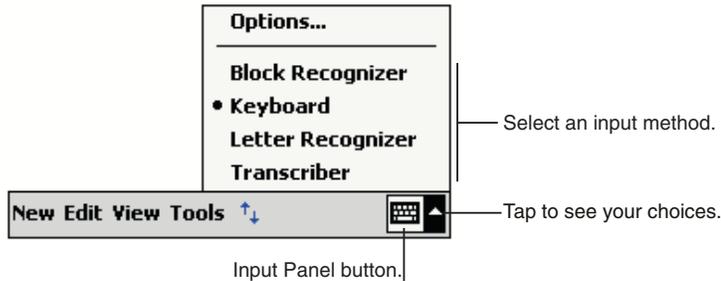


*Note:* The Transcriber tool is located on the Dolphin 9500/9550 Microsoft Companion CD and must be installed separately.

When you use the input panel, your terminal anticipates the word you are typing or writing and displays it above the input panel. When you tap the displayed word, it is inserted into your text at the insertion point. The more you use your Dolphin 9500/9550 terminal, the more words it learns to anticipate.

To change word suggestion options, such as the number of words suggested at one time, tap **Start> Settings>Personal >Input> Word Completion** tab.

## Using the SIP

1. Tap the arrow next to the Input Panel button and select **Keyboard**.
2. On the soft keyboard that is displayed, tap the keys with your stylus.

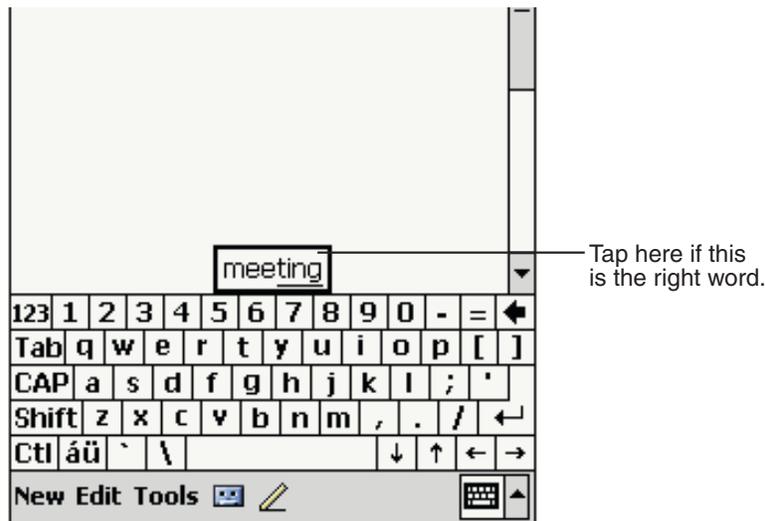


## Using the Letter Recognizer

With Letter Recognizer you can write letters using the stylus just as you would on paper.

1. Tap the arrow next to the Input Panel button and then **Letter Recognizer**.

---

2. Write a letter in the box.

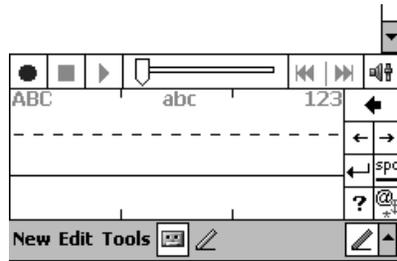


When you write a letter, it is converted to typed text that appears on the screen. For specific instructions on using Letter Recognizer, with Letter Recognizer open, tap the question mark next to the writing area **?**.

### *Using the Block Recognizer*

With Block Recognizer you can input character strokes using the stylus.

1. Tap the arrow next to the Input Panel button and then **Block Recognizer**.
2. Write a letter in the box.

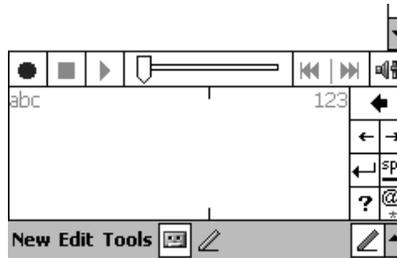

When you write a letter, it is converted to typed text that appears on the screen. For specific instructions on using Block Recognizer, with Block Recognizer open, tap the question mark next to the writing area.

### *Selecting Text*


To edit or format typed text, select it by dragging the stylus across the text. You can cut, copy, and paste text by tapping and holding the selected words and then tapping an editing command on the pop-up menu, or by tapping the command on the **Edit** menu.

---


## Input Panel Options

You can set input options by going to **Start > Settings > Personal tab > Input**. The following graphics are the tab windows where you can customize the input panel to your preferences:


Input Method tab

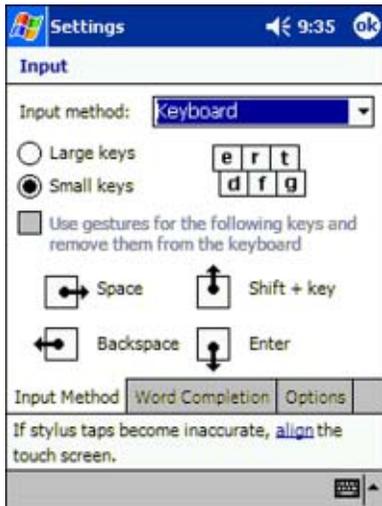

Word Completion tab

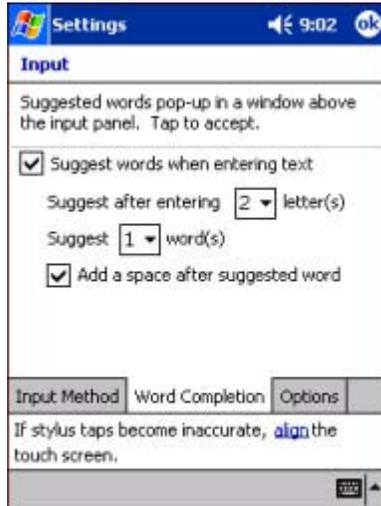

Options tab

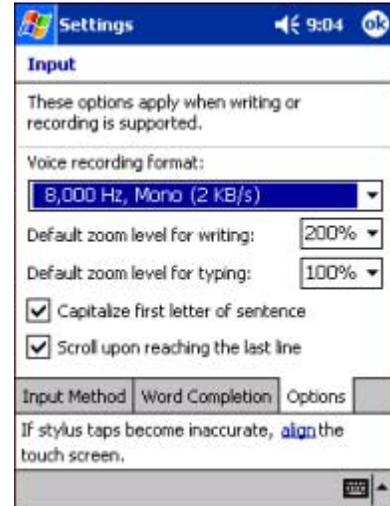

---

## Writing on the Screen

In any program that accepts writing, such as the Notes program, and in the **Notes** tab in Calendar, Contacts, and Tasks, you can use your stylus to write directly on the screen as you would on paper.

To write on the screen, tap the **Pen** button to switch to writing mode. This action displays lines on the screen to help you write.



Tap the Pen button and use your stylus like a pen.

*Note:* Some programs that accept writing may not have the Pen button. See the documentation for that program to find out how to switch to writing mode.

## To Select Writing

If you want to edit or format writing, you must select it first.

1. Tap and hold the stylus next to the text you want to select until the insertion point appears.
2. Without lifting, drag the stylus across the text you want to select.

If you accidentally write on the screen, tap **Tools**, then **Undo** and try again. You can also select text by tapping the **Pen** button to deselect it and then dragging the stylus across the screen.

You can cut, copy, and paste written text in the same way you work with typed text: tap and hold the selected words and then tap an editing command on the pop-up menu, or tap the command on the **Edit** menu.


---

## Drawing on the Screen

Drawing on the screen is similar to writing on the screen. The difference between writing and drawing on the screen is how you select items and how they can be edited.

To create a drawing, cross three ruled lines on your first stroke. A drawing box appears. Subsequent strokes in or touching the drawing box become part of the drawing. Drawings that do not cross three ruled lines will be treated as writing.

For example, selected drawings can be resized, while writing cannot.

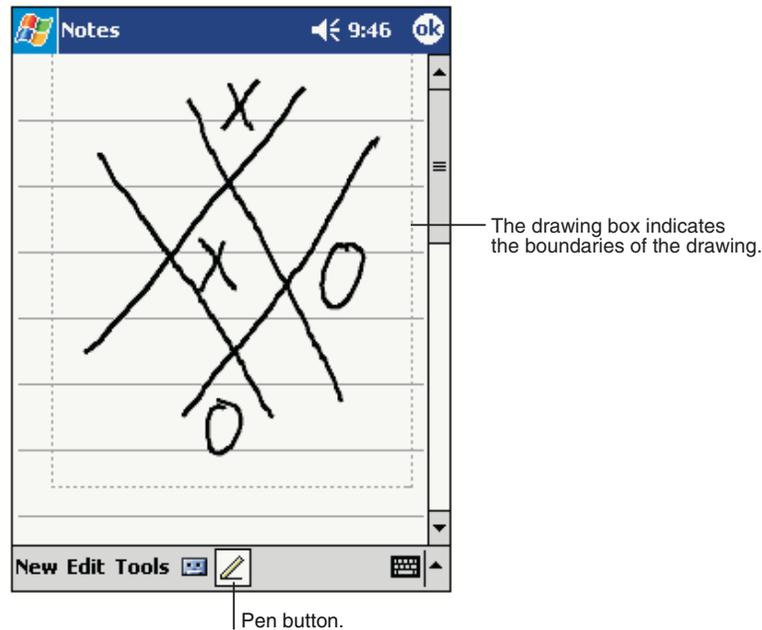

*Note:* You may want to change the zoom level so that you can more easily work on or view your drawing. Tap **Tools** and then a zoom level.

## Selecting a Drawing

To edit or format a drawing, tap and hold the stylus on the drawing until the selection handle appears. To select multiple drawings, deselect the Pen button and then drag to select the drawings you want.

You can cut, copy, and paste selected drawings by tapping and holding the selected drawing and then tapping an editing command on the pop-up menu, or by tapping the command on the **Edit** menu. To resize a drawing, make sure the Pen button is not selected, and drag a selection handle.

---

## Status Icons

Status Icon	Meaning
	Turns all sounds on and off
	Backup battery is low
	Main batteries are charging
	Main batteries are low
	Main batteries are very low
	Main batteries are full
	Synchronization is beginning or ending
	Notification that one or more e-mail messages were received

Note: The Notification icon  displays if more notification icons need to be displayed than there is room to display them. Tap the icon to view all notification icons.

## Notifications

Notifications remind you when you have something to do. For example, if you've set up an appointment in Calendar, a task with a due date in Tasks, or an alarm in Clock, you'll be notified in any of the following ways:

- A message box appears on the screen.
- A sound, which you can specify, is played.

To choose reminder types and sounds, tap **Start > Settings > Personal tab > Sounds & Notifications** (see [Personal Tab](#) on page 5-2). The options you choose here apply throughout the terminal.


---

## *Finding and Organizing Information*

The Find feature on your Dolphin mobile computer helps you quickly locate information. On the **Start** menu, tap **Find**. Enter the text you want to find, select a data type, and then tap **Go** to start the search.

To quickly find information that is taking up storage space, select **Larger than 64 KB** in **Type**.

You can also use the File Explorer to find files and organize these files into folders. On the **Start** menu, tap **Programs**, and then **File Explorer**.

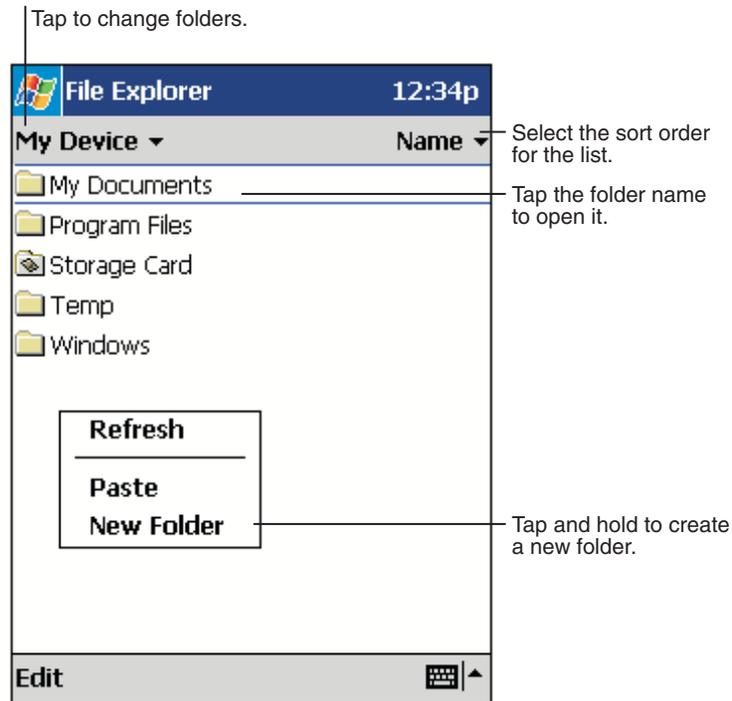

You can move files in File Explorer by tapping and holding the item you want to move, and then tapping **Cut** or **Copy** and **Paste** on the pop-up menu.

## Settings


### Overview

System settings are available off the Start menu. Go to **Start > Settings** and the system settings screen opens displaying the Personal tab. System settings are comprised of the following three tabs:

**Personal tab**



**System tab**

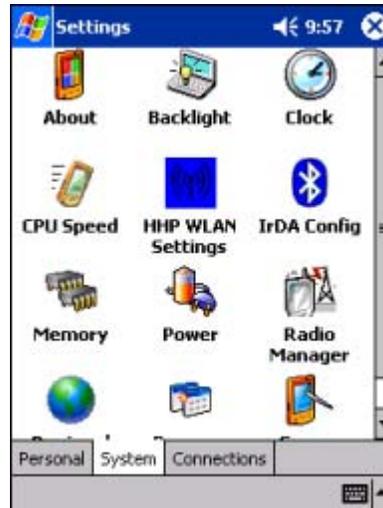

**Connections tab**



**Personal tab**

Enables you to customize buttons, input methods, menus, etc. - see [Personal Tab](#) on page 5-2.

**System tab**

Enables you to adjust system settings - see [System Tab](#) on page 5-5.


**Connections tab**

Enables you to establish network and connection settings - see [Connection Settings](#) on page 5-16.

---

## Personal Tab

To access the Personal tab, go to **Start > Settings**. The screen opens displaying the Personal tab.

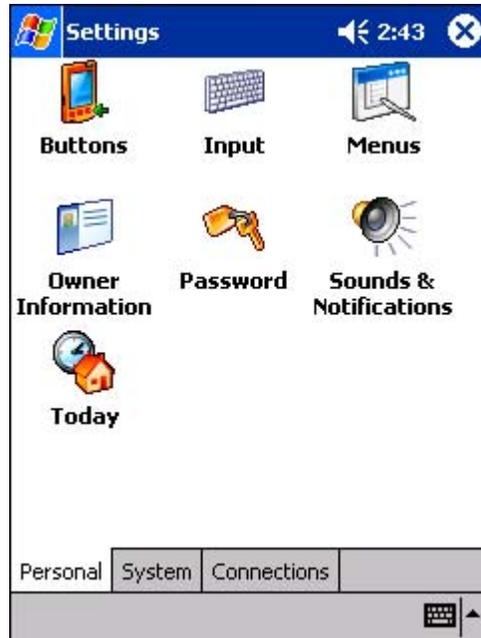

Button Name	Tapping this icon enables you to ...
<b>Buttons</b>	Customize buttons to perform functions. To use this setting, the HotKeys HHP Utility must be initialized. Tap <b>Start &gt; HHP Utils &gt; HotKeys</b> (the icon is the same). The HotKeys utility initializes. Return to the Personal tab and tap the Buttons icon.
<b>Input</b>	Customize the input panel. For details, see <a href="#">Input Panel Options</a> on page 4-22.
<b>Menus</b>	Customize what appears on the Start menu, and to enable a pop-up menu from the New button.
<b>Owner Information</b>	Enter your contact information.
<b>Password</b>	Password protect the terminal to limit access to your device.
<b>Sounds &amp; Notifications</b>	Set the sound volume, enable and disable sounds for specific actions, and set sound parameters for system notifications.
<b>Today</b>	Customize the look and the information that is displayed on the Today screen

*Note:* Personal settings are stored in RAM memory. They are replaced by system defaults after each hard reset. For more information about resets, see [Soft Reset \(Warm Boot\)](#) on page 2-12.


---

## Adding a Program to the Start Menu

You can add existing programs you use often, such as File Explorer, to the Start menu for faster access. You are not installing the program, just re-routing access to it.

### Using System Settings

1. Tap **Start > Settings > Personal tab > Menu > Start Menu** tab.

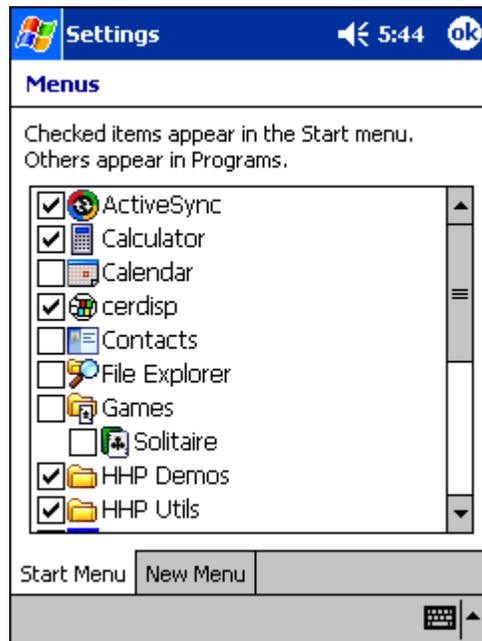


2. Tap the check box for the program you want to add and tap **OK** to save.
3. Tap the **Start** menu.
4. Verify that the program appears.

### Using File Explorer

If you do not see the program listed, you can either use File Explorer to move the program or ActiveSync on the desktop computer to create a shortcut to the program and place the shortcut in the Start Menu folder.


*Note:* We recommend that you Copy and Paste Shortcut so that you do not alter your program configurations by accident. Using Copy and Paste Shortcut (as opposed to Cut and Paste) ensures that the program files remain where they need to be for the system to find them to perform system functions.

1. Tap **Start > Programs > File Explorer**, and navigate to the program.  
File Explorer opens to My Documents by default; to see a list of all folders, tap the folder name and then **My Device**.

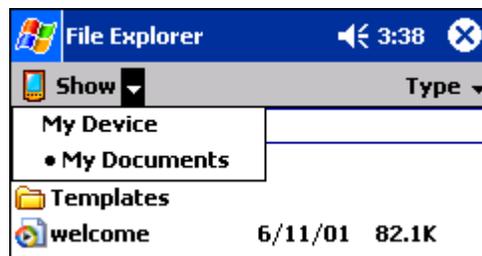

2. Tap and hold on the program, then tap **Copy** on the pop-up menu.

- 
3. Navigate to the Windows folder and open the Start Menu (**My Device > Windows > Start Menu**), tap and hold a blank area of the window, and tap **Paste Shortcut** on the pop-up menu.

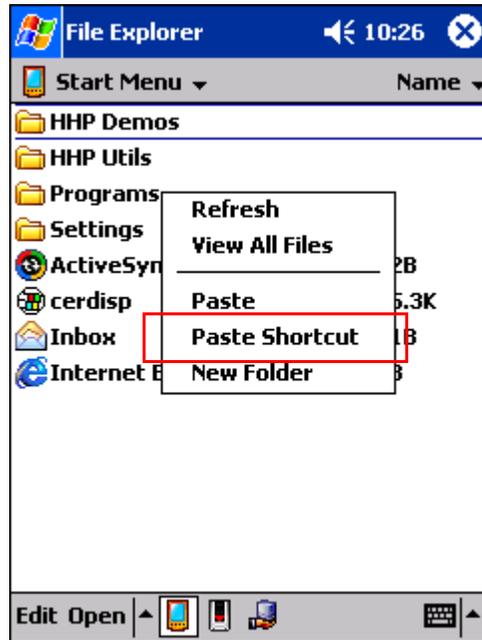

4. Tap the **Start** menu.
5. Verify that the program now appears.

### Using ActiveSync on the Desktop Computer

Here, you are performing the same basic process as on the terminal, except that you are using the Explore (Windows Explorer) utility to cut and paste.


1. Open **ActiveSync > Explore**.
2. Navigate to the program.
3. Right-click on the program and select **Create Shortcut**.
4. Select the shortcut, right-click, and select **Cut**.
5. Navigate to the **Start Menu** folder (Windows > Start Menu).
6. Right-click on an empty area and select **Paste**.
7. On the terminal, tap the **Start** menu.
8. Verify that program appears.

For more information, see ActiveSync Help.

---

## System Tab

The System tab enables you to verify and sometimes alter system parameters. To access the System tab, go to **Start > Settings > System** tab. Tap the appropriate icon to open that system setting.

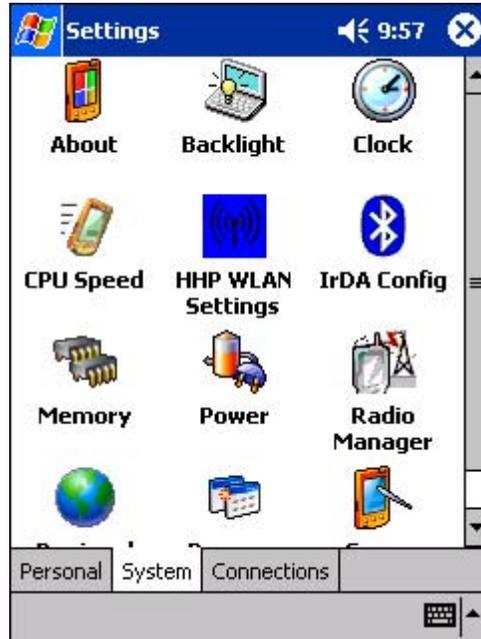

## About

The About system setting displays specific information about what is loaded on the terminal. It contains three tabs:

**Version** tab                      Displays the information about the software, operating system, and processor of the terminal.



**Device ID** tab                      Displays the information the terminal uses to identify itself to other devices. It can be important to know this information if the Dolphin terminal is going to be part of a networked system of devices.

---

**Device name:** Displays the system's default name. This is the name used by ActiveSync.  
**Description:** Displays the description of the device ID.

**Copyrights tab** Displays important copyright information.

### ***Backlight***


The Backlight system setting enables you to customize backlight functionality for the display. For more information, see [Adjusting the Backlight](#) on page 4-15.

### ***Clock***

This setting sets the system clock. Appointments, scheduled events, and any function on a schedule runs off this setting. You need to set the time zone and time after each hard reset; see [Setting the Time and Date](#) on page 2-10.


### ***CPU Speed***

This system setting enables you to see and change the current speed of the Central Processing Unit (CPU).

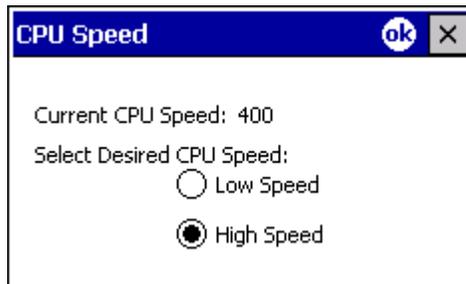

The default is **High Speed** at 400MHz. **Low Speed** is 200MHz.

To change the default, select Low Speed and tap **OK**. A message appear confirming the changed and now current CPU speed.

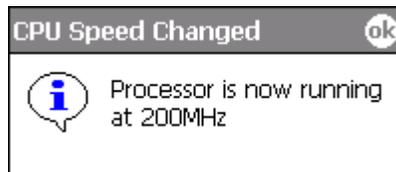

Tap **OK** to save the change.

### ***HHP WLAN Settings***


This option appears on the Settings tab only if an 802.11b radio is installed on the device. For more information, see [The Status Icon](#) on page 7-10.

---

## IrDA Config

This system setting allows you to verify the IrDA port settings.

Always displays the current status of the IrDA port. Enabled is the default.

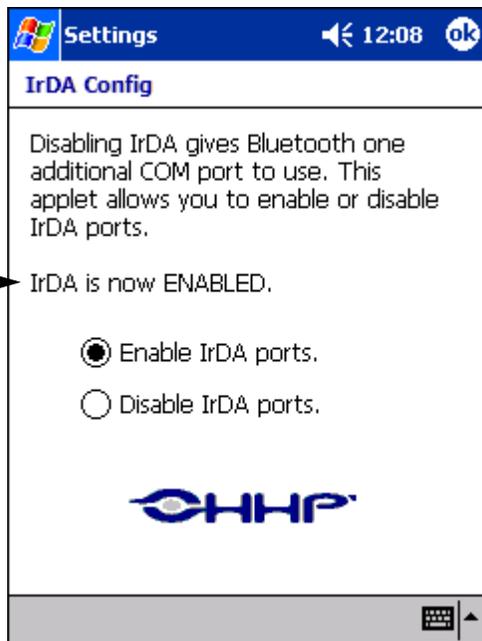

The IrDA com port can be disabled to free up a com port. This is useful if, for example, you are using a Bluetooth radio and want to connect the terminal to additional Bluetooth devices.

### To Disable the IrDA Port

1. Tap **Disable IrDA ports**.
2. You receive a message stating that you need to reset the terminal before the change takes effect. Tap **OK**.
3. Perform a soft reset; see [Soft Reset \(Warm Boot\)](#) on page 2-12.
4. Go to **Start > Settings > System tab > IrDA** and verify that the screen says "IrDA is now DISABLED."


---

## Memory

The Memory system setting enables you to review and manage both RAM (volatile) and IPSM/Storage Card (non-volatile) memory. Access this system setting whenever you receive system messages about memory.

There are three tabs: Main, Storage Card, and Running Programs.

**Main tab** This tab displays current capacity and usage of the 64MB of on-board, volatile RAM memory. This is the memory used for running and storing programs as well as storing program data.

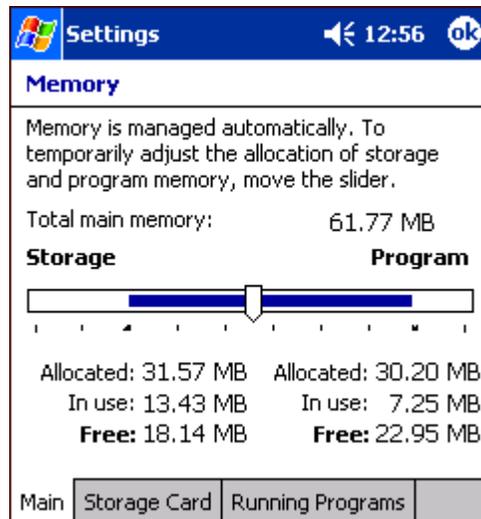

**Total main memory** The total memory capacity of current RAM memory.

**Storage** The part of RAM memory used for storing programs and program data.

**Program** The part of RAM memory used to run programs.

Fields Under Storage and Memory

**Allocated** Displays the current MB of memory allocated for Storage and Program use.

**In use** Displays the total MB of that allocated memory being used in Storage and Program memory functions.


**Free** Displays the total MB of memory available for Storage and Programs use.

### To Increase/Decrease RAM Memory

To increase Program or Storage memory, tap, hold, and drag the slider towards the kind of memory you want to increase. The three fields adjust automatically; Program memory decrease when you increase Storage memory and vice versa.

**Storage Card tab**

This tab displays the current capacity and usage statistics of the selected memory type; IPSM or Storage Card. Select the memory type from the drop-down list. IPSM is selected automatically.

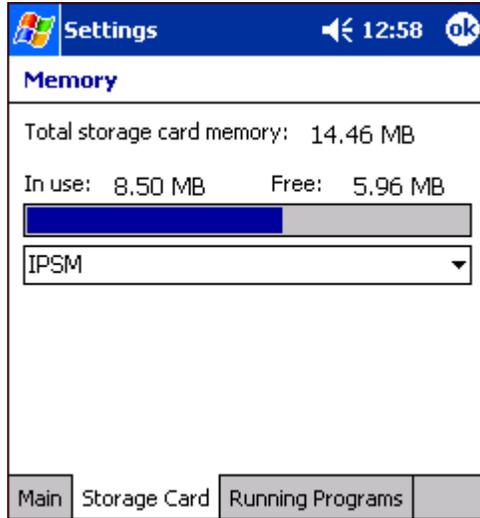

**Total storage card memory** The total MB of memory capacity of the selected memory.

**In use** The MB currently being used.

**Free** The MB that is still available for use.


**IPSM**

Short for Intel Persistent Storage Manager, this is 14MB of on-board Flash memory that is non-volatile. Because this memory is non-volatile, data or programs stored in IPSM are not affected when power is removed. Autoinstall programs, for example, are stored in IPSM so that they are always installed at cold-boot startup.

When IPSM is selected in the drop-down list, the Storage Card tab displays the IPSM memory capacity and usage statistics.


**Storage Card**

You can install additional memory in Dolphin terminals - see [SD Memory](#) on page 3-8. If a storage card is installed in the terminal, a Storage Card entry appears in the drop-down list.

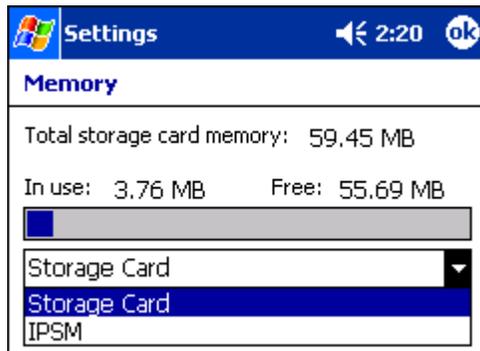

Select **Storage Card** and the Storage Card tab displays the current capacity and usage statistics of the installed storage card.

**Running Programs** tab Displays the software programs currently using Storage memory.

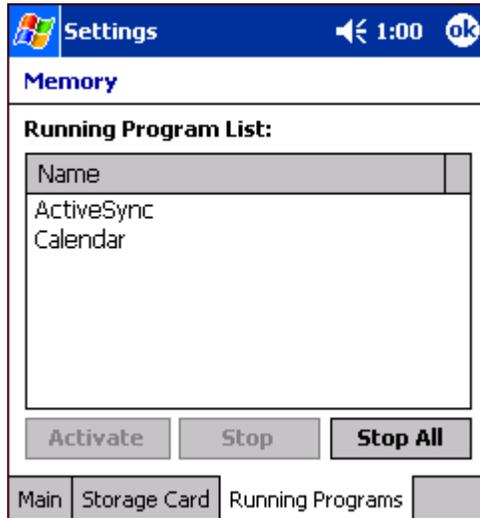

Check this tab when you are receiving out of memory errors or when the mobile computer is running slowly.

You can

- Select a program in the list and tap **Stop** to stop it from running (and therefore from using memory), or
- Tap **Stop All** to automatically stop all running programs.



*Anytime you stop a running program, it frees up RAM memory. Be advised that, when you stop a program here, any unsaved data in that program is lost. To free up memory without risking data loss, return to the running program, save your data, and close the application.*

### Links at the Bottom of the Memory Tabs

At the bottom of all three Memory tabs are two links:




**Remove programs**

Opens the Remove Programs system setting. For details, see [Remove Programs](#) on page 5-13.

**Find**


Enables you to search for large files using storage memory. It opens the Find screen with **Larger than 64KB** already selected in the **Type** field.

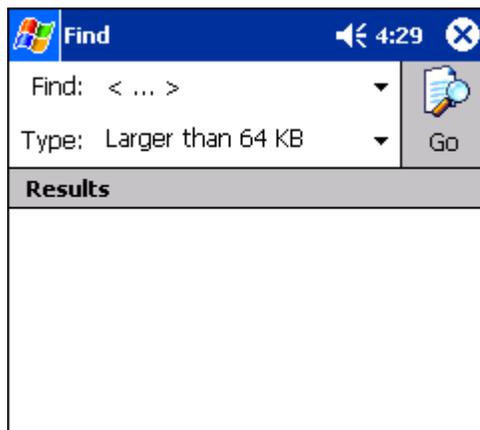

---

## Power

The Power system setting enables you to check the remaining charge of both the main and backup batteries. For more information, see [Batteries](#) on page 3-10.

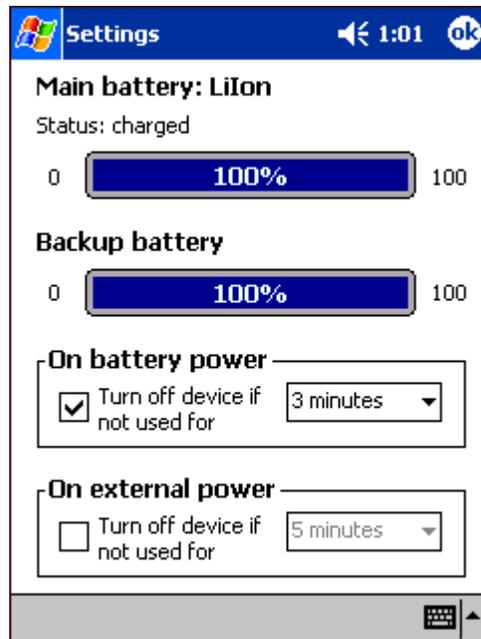

You can also set automatic turn-off times for the terminal to conserve power. When the device is “turned off,” that means that it goes into suspend mode. For more information on suspend mode, see [Suspend Mode](#) on page 2-12.

## Radio Manager


The Radio Manager enables you to see which radios are powered up on the Dolphin terminal. In this system setting, you power up and power down radios loaded on the terminal. For details, see [The Radio Manager](#) on page 4-18.

## Regional Settings

Regional Settings enables you to customize the appearance and formatting to your geographic region. Specifically, you can customize numbers (number of decimal places allowed, for example), currency (using the \$ or € symbol, for example), time, and date. These specifications apply to all screens, including the Today screen.

---

The Region tab displays an overview of the region selected in the drop-down list at the top.

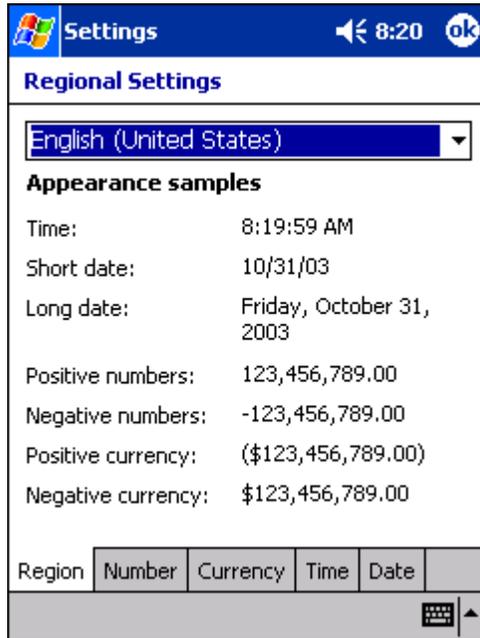


The terminal is loaded with a number of pre-programmed regional settings. Select one from the list.



---

The results appear below.

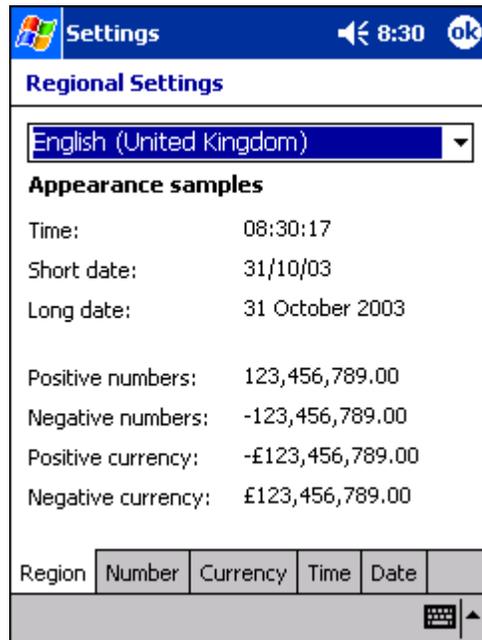

To see specific settings or change a specific setting, tap on one of the tabs, make the change and tap **OK** to save it.

### ***Remove Programs***

The Remove Programs settings enables you to remove programs installed on the terminal. Use this setting to troubleshoot when you receive messages that the device is out of memory.

The programs removed are removed from RAM memory. Any program (usually \*.cab or \*.dll files) stored in the Autoinstall folder (**My Device > IPSM > Autoinstall**) will re-install after the next hard reset.


For information about the Autoinstall process, see [Autoinstall](#) on page 2-10.

For information about the hard reset process, see [Hard Reset \(Cold Boot\)](#) on page 2-12.

---

## To Remove Programs:

1. Tap **Remove Programs**. In the list, select the program you want to remove.

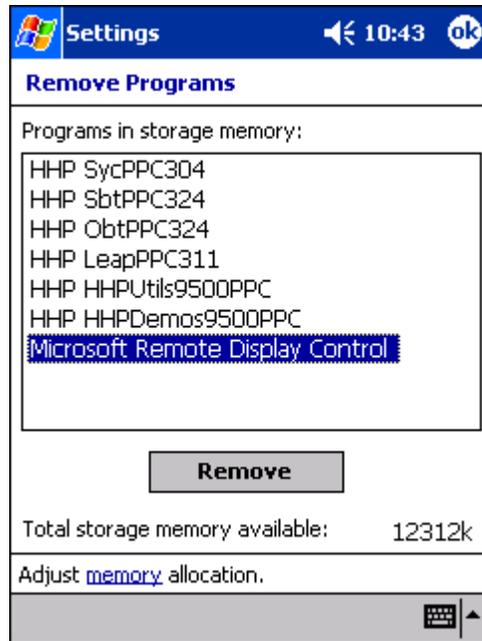

2. Tap **Remove**. The following message appears:



3. Tap **Yes**. Wait while the program is removed.
4. Verify that the program no longer appears in the list.

## Memory

The Remove Programs screen displays the total storage memory available. It adjusts automatically when a program is removed for quick reference. For more detailed memory information, tap **memory** of “Adjust **memory** allocation.” along the bottom margin. It opens the Memory system setting. For information about memory settings, see [Memory](#) on page 5-8.

---

## Screen

The Screen setting enables you to re-align the screen at any time. You would need to re-align the screen if tapping buttons or icons with the stylus no longer seems to work appropriately.



To align the screen, tap **Align Screen**, and follow the instructions. See [Align the Screen](#) on page 2-8.

### ClearType

Dolphin 9500/9550 displays support ClearType font rendering. ClearType is a Microsoft technology that dramatically increases the readability of text on LCD displays. Select the **Enable ClearType**, tap **OK**, and perform a soft reset; see [Soft Reset \(Warm Boot\)](#) on page 2-12.

For more information about ClearType font rendering for Pocket PC, visit: <http://www.microsoft.com/typography/cleartype/what.htm?fname=%20&fsize=>


### Input Options

Tapping **input** of "Adjust input options to improve speed and accuracy" opens the input panel settings; see [Input Panel Options](#) on page 4-22.

---

## Connection Settings

The Connections tab serves as a connections manager for the terminal that enables you to manage your network connections.

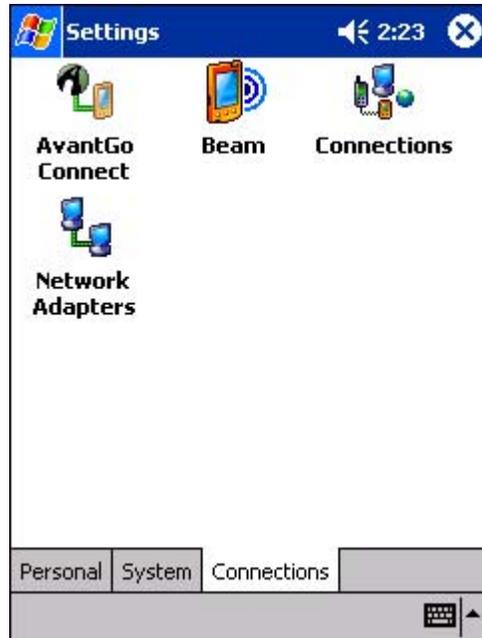


There are three main components:

- Beam** Enables you to verify and adjust the infrared settings of the IrDA port. For details, see [Using Infrared](#) on page 6-5.
- Connections** Enables you to configure your network connections for internet and work, create new connections, and set default connections.
- Network Adapters** Enables you to configure your network adapters.

---

## Connections Tab

The Connections screen enables you to manage internet, work, and network card connections that the terminal defaults to when connecting to the network.

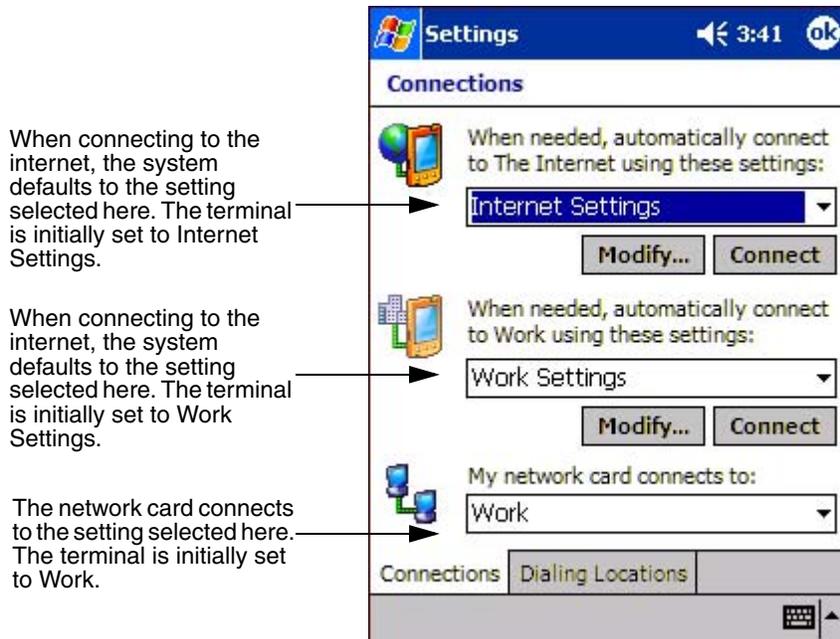

## Internet Settings

When configuring internet settings, make sure that you are prepared with dial-up numbers and other necessary numbers from your office network or internet service provider (ISP).


There are two tabs for internet settings: Modem and General.

### Modem tab

This tab enables you to establish individual modem settings for each internet connection. It leads you through a series of screens and tabs that enable you to enter both basic and advanced network and dial-up information.

### General tab


This tab enables you to name or, rather, re-name "Internet Settings" to a name of your own choosing. If you enter a new name and tap **OK**, that name appears in drop-down lists instead of "Internet Settings."

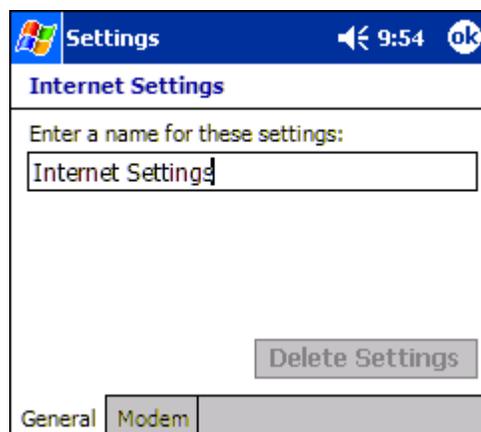


---

## To Configure Internet Settings

1. On the Connections tab, select **Internet Settings** in the first drop-down list, and tap **Modify**. The Internet Settings screen appears displaying the **Modem** tab. The list in the middle of the screen displays existing internet connections. If you have not yet established an internet connection, "New..." appears in the list.

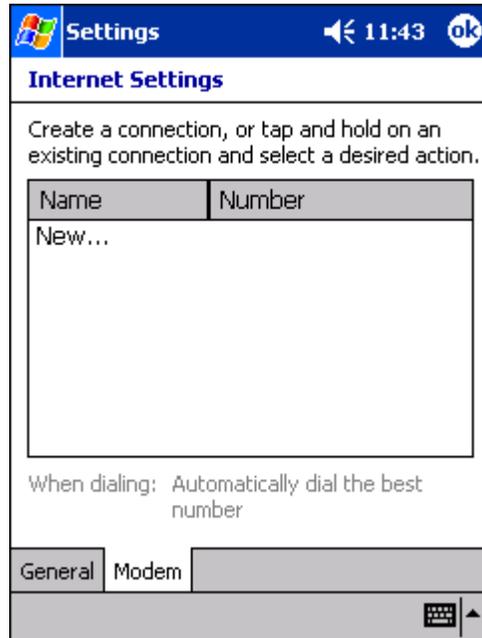

2. Tap **New**. The Make a New Connection screen appears.

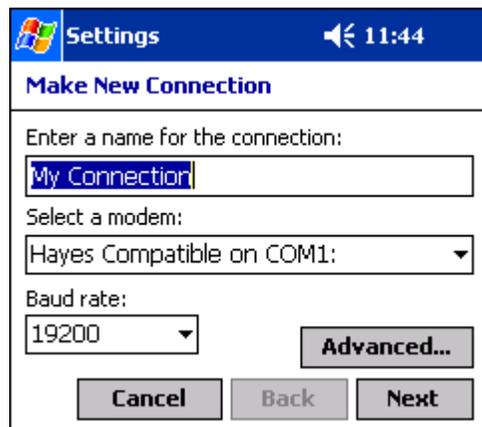

3. Complete the fields.

- **Enter a name for the connection** in the first field. "My Connection" is auto-filled by default. You can type over it with the SIP that appears or the using the keyboard. This name identifies this internet connection and appears in the list on the Internet Settings screen.
- **Select a modem** from the drop-down list. This list displays available COM ports (including IrDA, if enabled).
- Select the appropriate **Baud rate** for both the modem and the network you're using.
- (Tap **Advanced** to enter Port Settings, TCP/IP, and Name Servers; see [Advanced Settings](#) on page 5-19.)

---

4. Tap **Next** to enter the phone number for the modem to dial.

Settings 9:33

**My Connection**

Country code: 1

Area code: 425

Phone number:

Cancel Back Next

5. Enter the phone number and tap **Next**.

Settings 4:03

**My Connection**

Cancel call if not connected within 120 seconds

Wait for dial tone before dialing

Wait for credit card tone 0 seconds

Extra dial-string modem commands:

Cancel Back Finish

6. Enter the parameters, including any extra dial-string modem commands, and tap **Finish**. You are returned to the Internet Settings screen where the new connection name and number appear in the list. You can tap on it any time to edit the settings.

### Advanced Settings

When making a new connection (see page 5-18) or editing an existing connection, you can tap **Advanced** to open three tab windows that enable you to connect your terminal to an integrated network: Port Settings, TCP/IP, Name Servers.

You should not need to change advanced settings. If you do, verify with your network administrator that you have the correct information.

## Port Settings


Advanced settings opens to this tab window. On it, enter the parameters for the port the terminal is using.

### Connection preferences

- Data Bits
  - Can be set between 4 and 8
- Parity
  - Can be set to None, Odd, Even, Mark, or Space
- Stop Bits
  - Can be set to 1, 1.5, or 2
- Flow Control
  - Can be set to Software, Hardware, or None

### Terminal settings

- Use terminal before connecting
  - Use terminal after connecting
  - Enter dialing commands manually
- Tap **OK** to save settings.

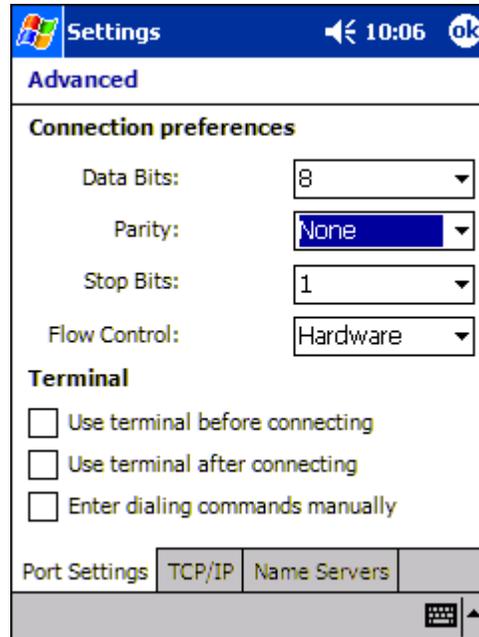


## TCP/IP settings

Tap on this tab to configure TCP/IP settings. Server-assigned IP addresses use Dynamic Host Configuration Protocol (DHCP).

### You can

- Use the server-assigned IP address (recommended) or enter a specific IP address in the field provided
- Use Slip
- Use software compression
- Use IP header compression

Tap **OK** to save settings.

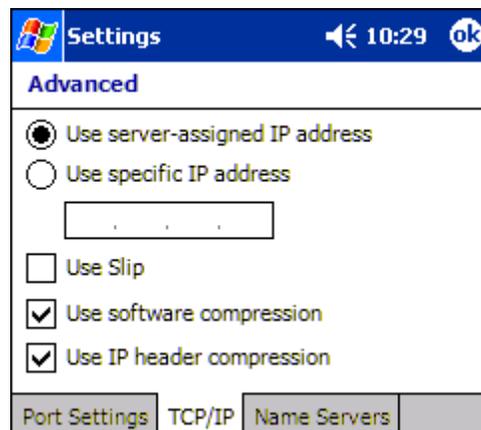


---

**Name Servers** settings Tap on this tab to determine how the terminal connects to servers. Server-assigned IP addresses use DHCP.

You can

- Use the server-assigned IP address (recommended) OR
- Enter a specific server address in the fields provided:
  - DNS and Alt DNS - enter the domain name server address to locate the appropriate domain. If the domain can't be found, the Alt DNS is tried automatically.
  - WINS and Alt WINS - enter the appropriate IP address to locate the desired server on the windows network. If the server can't be found, the Alt WINS address is tried automatically.

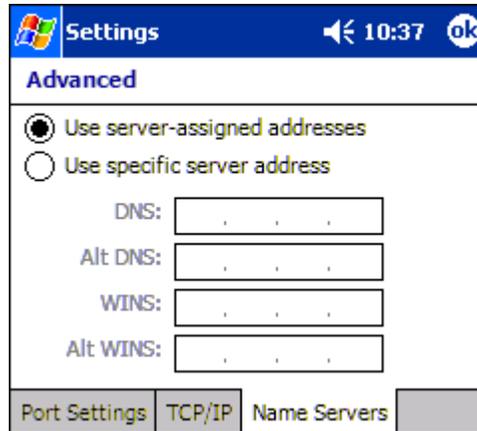

Tap **OK** to save settings.

## Work Settings

When configuring work settings, make sure that you are prepared with dial-up numbers and other necessary numbers from your office network or internet service provider (ISP).

To access work settings, navigate to the Connections screen (**Start > Settings > Connections** tab > **Connections**), select Work Settings in the second drop-down list.

There are four tabs for work settings: General, Modem, VPN, and Proxy Settings.

**General** tab The General tab for Work Settings functions the same way it does for Internet Settings; for more information, see page 5-17.

**Modem** tab The Modem tab for Work Settings functions the same way it does for Internet Settings; for more information, see [To Configure Internet Settings](#) on page 5-18.


**VPN** tab The VPN tab enabled you to create virtual private network for your work settings.

**Proxy Server** tab The Proxy Server tab enables you to connect to the internet via a proxy server.


---

## VPN Tab

1. After the Modem settings have been established, tap on the **VPN** tab. The Work Settings screen displays with a list of connections in the middle of the window. If no connections have been established, only New... appears.

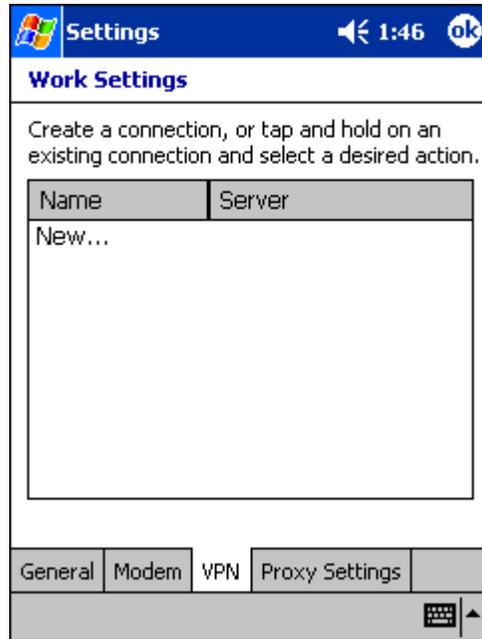


2. Tap **New** to make a new connection.

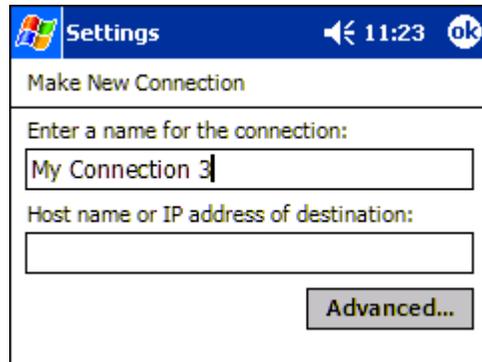

3. Enter a name for the connection and type the desired IP address. Tap **Advanced**. The system processes the information and the TCP/IP and Name Servers tabs appear.
  - See TCP/IP tab on page 5-20 for information about completing this tab.
  - See Name Servers tab on page 5-21 for information about completing this tab.
4. Tap **OK** and you are returned to the VPN tab.

5. Tap **OK** again and you are returned to the Work Settings screen, which now lists the new VPN connection.

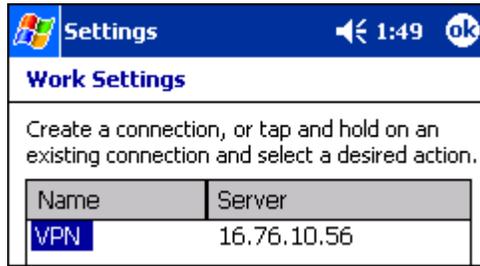


## Proxy Settings

Proxy settings are most often used when your terminal is connected to a network with a firewall. In this case, you would connect to the internet via a proxy server.


### To Connect Via Proxy Server

1. Open Work Settings and tap the **Proxy Server** tab.

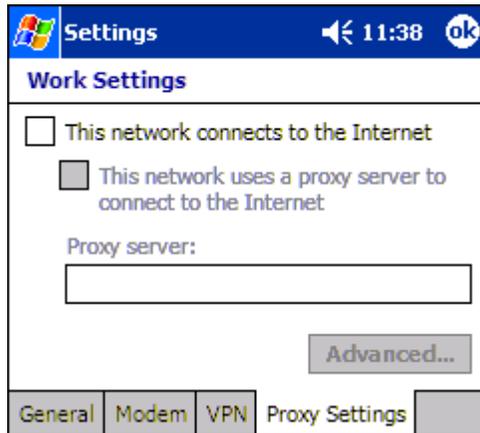

2. Check the first box, then check **This network uses a proxy server to connect to the Internet**.

3. Enter the **Proxy server** information in the field provided and tap **Advanced**.

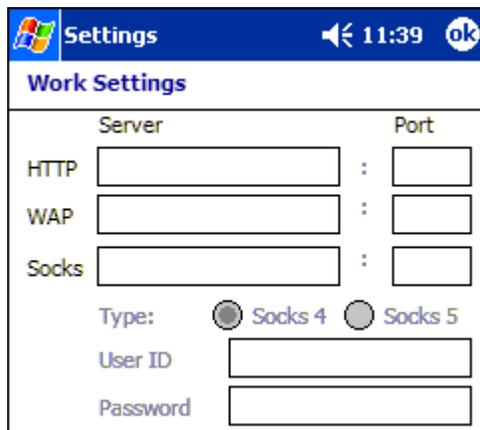

4. Complete the fields

- **HTTP** address and Port
- **WAP** and Port - enter the wireless access point identifier for the network

- **Socks** and Port - if your network uses the circuit-level proxy server. If you enter an address here, the Type field activates and you need to select Socks 4 or Socks.
- The **User ID** and **Password** fields activate after you have entered the appropriate information. If the fields activate, you need to complete both.

5. Tap **OK** to save and you are returned to the Proxy Server tab.

6. Tap **OK** again and you are returned to the Work Settings screen, which now lists the new Proxy Server connection.

### *Deleting Connections*

To delete a connection at any time, you need to navigate to it from the Connections tab. On the Modem tab of either the Internet or Work Settings screen, tap and hold on the connection. A pop-up menu appears.



Select **Delete** and the connection is deleted.


### *Creating a Custom Connection*

The Dolphin 9500/9550 terminal comes loaded with Internet Settings and Works Settings as options in the drop-down lists on the Connections tab. You can create new settings of each type. After they are saved, custom settings appear in the drop-down lists on the Connections tab.

---

## Internet Settings

On the Connections tab, in the first field (for Internet Settings), select **New** in the drop-down list. The General tab opens so that you can name the connection.

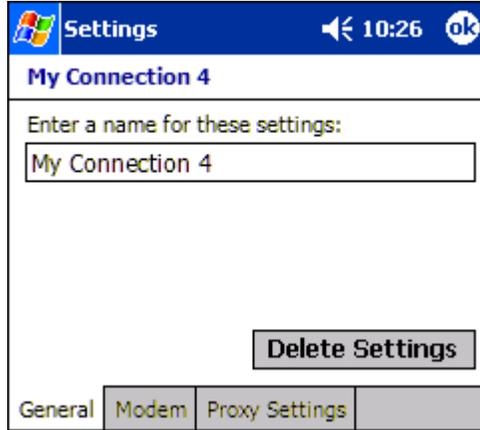


Tap the Modem tab. The Modem tab opens. From there, complete the rest of the process for internet settings. For more information, see [Internet Settings](#) on page 5-17.

You also have the option of tapping the Proxy Settings tab to have this connection go through a proxy server. For more information, see [Proxy Settings](#) on page 5-23.

## Work Settings

On the Connections tab, in the second field (for Work Settings), select **New** in the drop-down list. The General tab opens so that you can name the connection.

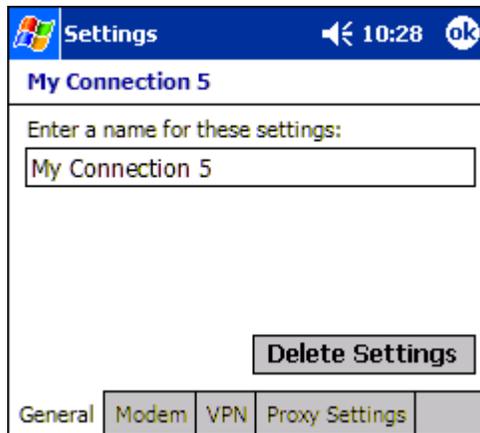


Tap the Modem tab. The Modem tab opens. From there, complete the rest of the process for setting up a work connection. For more information, see [Work Settings](#) on page 5-21.

---

## Connecting

You can test your connection settings on the Connections tab (see page 5-17) any time. In either of the first two drop-down lists (Internet and Work), select the desired setting.

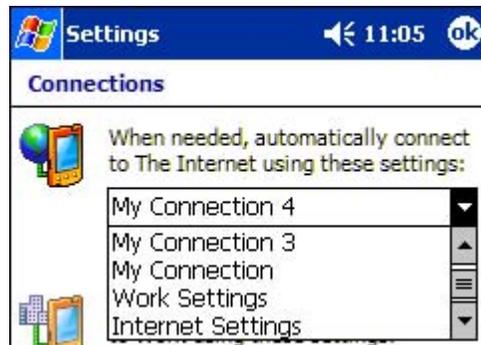


Tap **Connect** and the terminal begins connecting to the network.

*Note:* The Connect button is active only when the selected connection setting is valid.

---

## Network Card Connections

The third field on the Connections tab (see page 5-17) enables you to select the connection setting of your network card. You can have your network card use your internet or work settings.

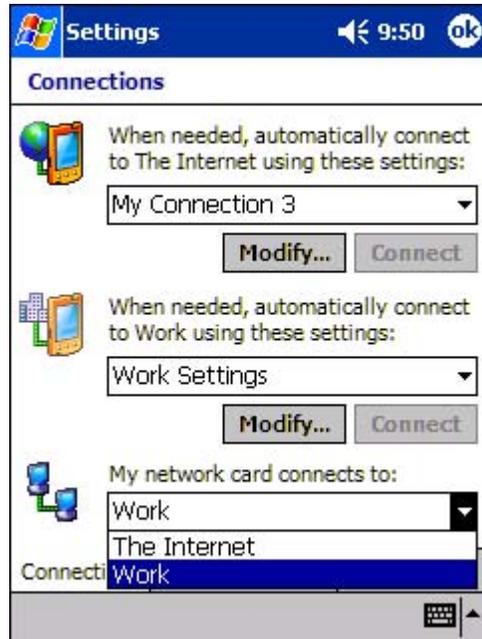

Tap **OK** to save settings.


---

## Network Adapters

On the Connections tab (see page 5-17), tapping **Network Adapters** enables you to review the adapters installed on the terminal and the properties associated with each.




To see the IP addresses and Name Servers of a network adapter, select one in the list, and tap **Properties**. Server-assigned IP addresses use DHCP.

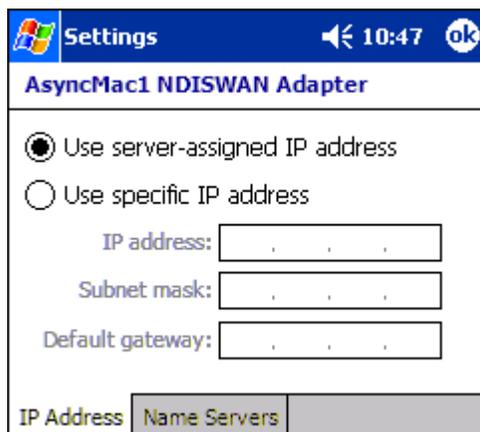

---

## *Editing Properties*

Any time you open properties and tap **OK**, the system saves the settings. The following message appears after you tap **OK**:

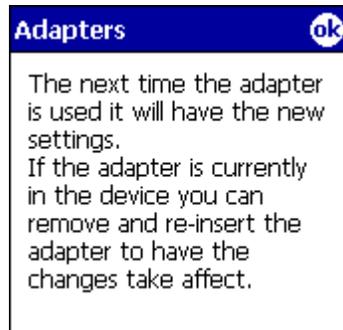

Tap **OK** again to save any changes.

When you edit the properties of an existing adapter, you must perform a soft reset (see [Soft Reset \(Warm Boot\)](#) on page 2-12) so that new registry entries created by the changes can be read by the applications that need them.



Do NOT perform a hard reset after modifying a network adapter. Hard resets return the terminal to factory defaults. For more information, (see [Hard Reset \(Cold Boot\)](#) on page 2-12).



## Communications

### Overview

You can exchange information between your Dolphin 9500/9550 and other mobile devices, a desktop computer, a network, or the Internet. You have the following connection options:

- Connect to your desktop computer and synchronize via Microsoft ActiveSync v3.7 or higher.
- Use the infrared (IrDA) port to send and receive files between two devices.
- Connect to your Internet Service Provider (ISP).

### Help on Connecting

More information on the procedures described here, as well as information on additional procedures, can be found in the following locations:

- ActiveSync Help on the desktop computer. In ActiveSync, click **Help > Microsoft ActiveSync Help**.
- See [Inbox](#) on page 9-12.
- Online Help. Tap **Start > Help > View menu > All Installed Help > Inbox or Connections**.

For troubleshooting information, go to the Pocket PC website at: <http://www.microsoft.com/windowsmobile/products/pocketpc/>

### Installing Additional Software

In addition to the default programs installed on your terminal when it is first booted up, you can install any program (created for a Pocket PC device), as long as the terminal has enough memory to store the program and the program has an \*.exe, \*.cab, or \*.dll extension.

The most popular place to find software on the Pocket PC website: <http://www.microsoft.com/mobile/pocketpc/>



*When selecting programs, verify that the program and version of the program are designed for the Pocket PC and your processor. You can verify your processor by tapping Start > Settings > System tab > About > Version tab. Make a note of the information in the Processor field.*

You can install additional software via:

- ActiveSync - see page 6-3.
- Infrared - see page 6-5.
- The Internet (including a wireless network connection) - see page 6-9.

---

## Using ActiveSync

Using Microsoft ActiveSync, you can synchronize information in Microsoft Outlook or Microsoft® Exchange Server on your desktop computer with your Dolphin 9500/9550. You can also synchronize this information directly with a Microsoft Exchange server.

Synchronization compares the data on the desktop computer and the terminal and updates both with the most recent data so that the information on both is identical.

You can:

- Update the information in Microsoft Pocket Outlook® on your device by synchronizing it with Microsoft Outlook on your desktop computer.
- Synchronize Microsoft Word and Microsoft Excel files between your device and desktop computer. Your files are automatically converted to the correct format.

The most current version of ActiveSync can be downloaded from [www.microsoft.com](http://www.microsoft.com).

## Additional Capabilities

With ActiveSync, you can also:

- Back up and restore your device data.
- Copy (rather than synchronize) files between your device and desktop computer.
- Control when synchronization occurs by selecting a synchronization mode. For example, you can synchronize continually while connected to your desktop computer or only when you choose the synchronize command.
- Select which information types are synchronized and control how much data is synchronized. For example, you can choose how many weeks of past appointments you want synchronized.

## Requirements

To synchronize, ActiveSync version 3.7 or higher *must* be installed on both your desktop computer and the Dolphin 9500/9550 terminal. Dolphin 9500/9550 terminals ship with ActiveSync 3.7 already installed. Therefore, you must install ActiveSync 3.7 on your desktop computer from the Microsoft Companion CD that came with your terminal.

To install ActiveSync on your desktop computer, insert the Microsoft Companion CD into the CD-ROM drive of your desktop computer. Click the **yellow arrow**, then **Start Here**, and follow the directions on your screen.



*When communicating via ActiveSync, your terminal must be connected to the host PC with a peripheral device sold/manufactured by HHP, such as the Dolphin HomeBase, Dolphin Mobile Base, Dolphin Net Base, Dolphin Mobile Charger or other Dolphin 9500 series charging/communication cable. Use of any peripheral not sold/manufactured by HHP may damage your terminal and will void the warranty.*

For more information about communication peripherals, see [Dolphin 9500/9550 HomeBase](#) on page 10-1 and [Dolphin 9500/9550 Mobile Base](#) on page 11-1.

## Setting Up Your Desktop Computer

When installation of ActiveSync is complete on your desktop computer, the ActiveSync Setup Wizard helps you

- connect your terminal to your desktop computer,
- set up a partnership so you can synchronize information, and
- customize your synchronization settings.

## Synchronizing from Your Desktop Computer

Because ActiveSync is already installed on the Dolphin 9500/9550 terminal, your first synchronization process begins automatically when you finish setting up your desktop computer in the wizard and your terminal is connected to the host PC.

After your first synchronization, look at Calendar, Contacts, and Tasks on the terminal. Notice that the same information from Microsoft Outlook on your desktop computer is now on the terminal. Simply remove the Dolphin from the communication peripheral and you're ready to use it.

By default, ActiveSync does **not** automatically synchronize all types of information. Use **ActiveSync Options** to specify the types of information you want to synchronize. The synchronization process makes the data (in the information types you select) identical on both your desktop computer and your device.


For more information about using ActiveSync on your desktop computer, open **ActiveSync**, then open **ActiveSync Help**.

---

## Synchronizing from the Terminal

ActiveSync **must** be setup on your desktop computer and the first synchronization process completed *before* you initiate synchronization from the terminal.

To initiate synchronization, tap **Start > ActiveSync**. The synchronization process begins.

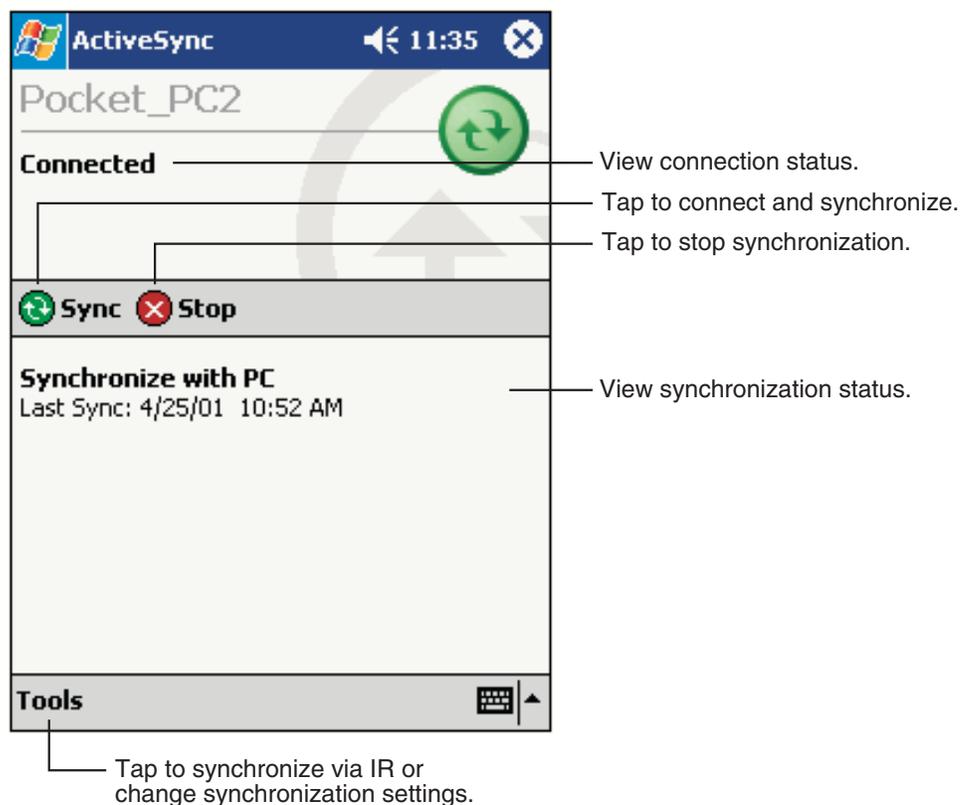

*Note:* If you have a wireless LAN card, you can synchronize remotely.

## Adding Programs to the Terminal Using ActiveSync

The software application must be stored or installed on the host PC. Some programs are installers and install on the PC and the terminal at the same time. Some programs designed for terminals cannot be installed on PCs. In those cases, the appropriate files must be stored on the host PC, transferred via ActiveSync, and installed on the terminal.



*When selecting programs, verify that the program and version of the program are designed for the Pocket PC and your processor. You can verify your processor by tapping Start > Settings > System tab > About > Version tab. Make a note of the information in the Processor field.*

1. Download the program to your desktop computer from either the Internet or the CD or disk that contains the program. You may see a single \*.exe or setup.exe file, a \*.cab file, or \*.dll. There may also be several versions of files for different device types and processors.
2. Read any installation instructions, Read Me files, or documentation that comes with the program. Many programs provide special installation instructions.
3. Connect the terminal to the host PC via an HHP communication peripheral.

### If the File is an Installer:

4. Double-click the \*.exe or \*.setup.exe file. The installation wizard begins. Follow the directions on the PC screen. The installation process includes transferring the software to the terminal.

---

### If the File is Not an Installer:

5. An error message appears stating that the program is valid but designed for a different type of computer. You need to manually transfer this file to the terminal.
6. If you cannot find any installation instructions for the program in the Read Me file or documentation, open **ActiveSync** and click **Explore**.\*
7. Navigate to the **My Pocket PC** folder and copy the program file or files to the **Program Files** folder on the terminal.
  - If you want the program to be part of the Autoinstall that occurs after every hard reset, place the program file in the **Autoinstall** folder (My Pocket PC > IPSM > Autoinstall).
8. Depending on the program, you may need to open **File Explorer** on the terminal, navigate to the folder where the program is located, and tap on the program file to install it.
  - If you copied the file to the **Autoinstall** folder, you can either tap on the program inside the Autoinstall folder or perform a hard reset and the program will install as part of the regular Autoinstall; see [Autoinstall](#) on page 2-10. Remember, a hard reset erases RAM data! For more information, see [Hard Reset \(Cold Boot\)](#) on page 2-12.

After installation on the terminal is complete, tap **Start > Programs** and the program and its icon appears on the Programs screen. Tap it to open the program.

---


## Using Infrared

Dolphin 9500/9550 terminals contains infrared or IrDA ports on the left side panel (see [IrDA Port](#) on page 3-8). Using these ports, you can send and receive data between the terminal and other devices equipped with infrared. This can include, but is not limited to, Pocket PC information such as Contacts and Tasks, as well as software upgrades.

### Verify That the IrDA Port is Enabled

The IrDA port must be enabled to transmit data. By default, the IrDA port is assigned to com port 6 and is enabled. It can be disabled to free up a com port.


Verify that the IrDA port is enabled before attempting to transmit data via infrared. Go to **Start > Settings > System tab > IrDA Config**.

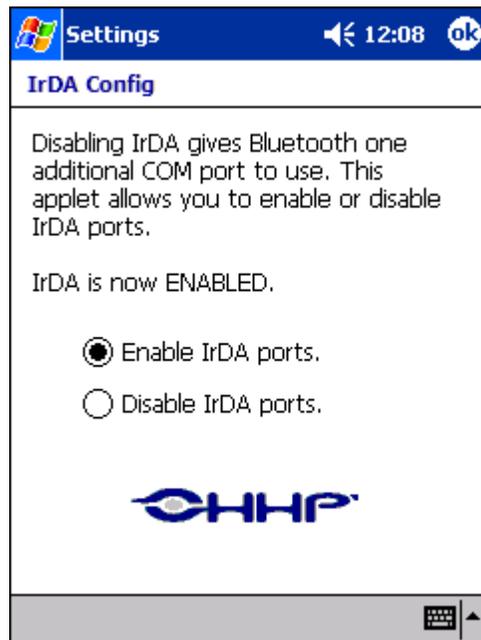


---

### *Verify That Beam Settings Are Set to Receive*

The Beam Settings must be set to receive for the terminal to receive data from other infrared devices. To verify, tap **Start > Settings > Connections tab > Beam**. The Beam Settings window should appear as follows:

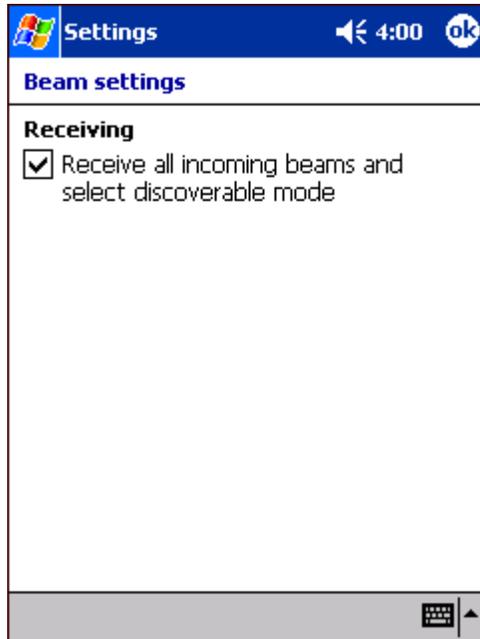

### *IrDA Port Location on the Terminal*

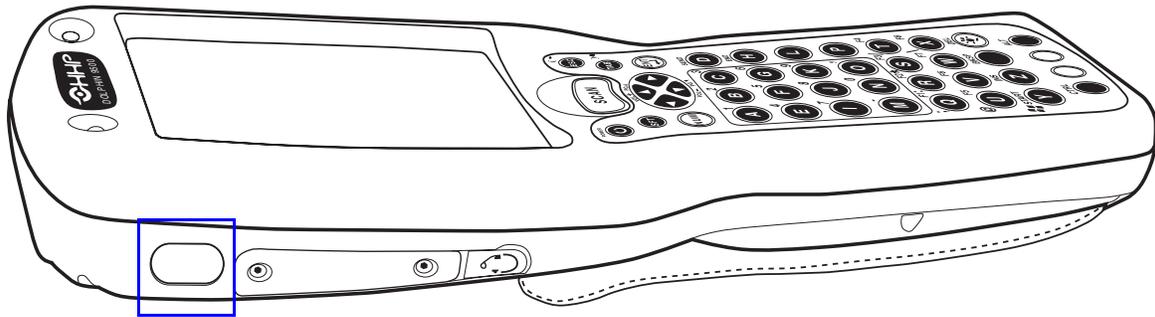

The above graphics shows a Dolphin 9500 terminal. The location is the same on both Dolphin 9500 and Dolphin 9550 terminals. For more information, see [IrDA Port](#) on page 3-8.


---

## *Sending and Receiving Information*

To send or receive, the IrDA ports of both devices - whether it's two terminals, or a terminal and a host device - must be aligned with each other and within a close range. The maximum data-transfer speed is 115 Kbps.

### **Sending:**

1. Align the IrDA ports.
2. Open the program where you created the item you want to send and locate the item in the list. You can also beam files, but not folders, from File Explorer.
3. Tap and hold the item. A pop-up menu appears.

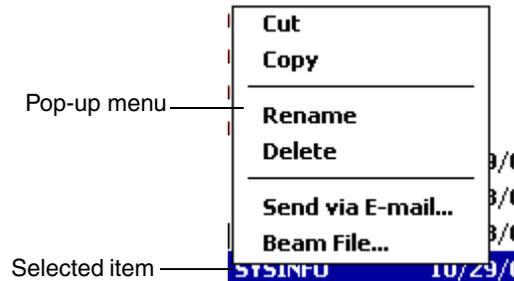

4. Select **Beam File**. The information begins transmitting to the other device.


### **Receiving:**

1. Align the IrDA ports.
2. Have the owner of the other device send the information to you.
3. Your terminal automatically begins receiving it.

---

## Troubleshooting

If the Beam Settings are not set to receive or you've aligned two IrDA ports and the terminal is still not receiving, go to **Start > Programs > Infrared Receive**. The terminal searches for the sending device.

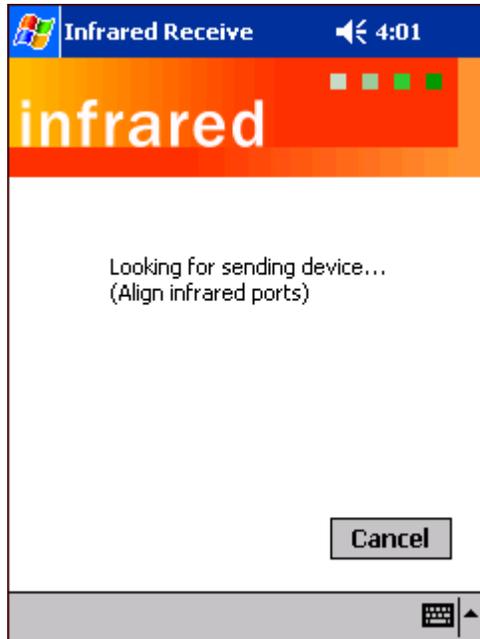

If the terminal cannot find the sending device, the following message appears:



---

## *Using an ISP*

The communication software for creating an ISP connection is already installed on your device. Your service provider should provide the software needed to install other services, such as paging and fax services.

After you are connected, you can send and receive e-mail messages by using Inbox and view Web or WAP pages by using Pocket Internet Explorer. For more information, see [Inbox](#) on page 9-12. You can also download software applications from the web.

## *Adding Programs Directly from the Internet*



*When selecting programs, verify that the program and version of the program are designed for the Pocket PC and your processor. You can verify your processor by tapping Start > Settings > System tab > About > Version tab. Make a note of the information in the Processor field.*

1. Determine your device and processor type so that you know which version of the software to install. Go to **Start > Settings > System** tab > **About**. On the **Version** tab, make a note of the information in the **Processor** field.
2. Download the program to your device straight from the Internet using Pocket Internet Explorer. You may see a single \*.exe or setup.exe file, or several versions of files for different device types and processors.
3. Read any installation instructions, Read Me files, or documentation that comes with the program. Many programs provide special installation instructions.
4. Tap the file, such as an \*.exe file. The installation wizard begins. Follow the directions on the screen.

For more information about working with Pocket Internet Explorer, see [Pocket Internet Explorer](#) on page 9-17.



## Wireless LAN Communications with 802.11b

### Overview

Dolphin 9500/9550 terminals are available with an on-board 2.4 GHz 802.11b (Wireless Local Area Network) WLAN radio that uses Direct Sequence Spread Spectrum (DSSS) technology to spread the signal continuously over a wide frequency band. It provides a data rate of up to 11 Mbps. In addition, the open software architecture makes the Dolphin 9500/9550 a complete solution for a variety of wireless mobile data collection applications.

The Dolphin 9500/9550 is interoperable with other 802.11b WiFi-compliant products including access points, printers, PCs via PC-card adapters and other wireless portable terminals.

### Powering Up the 802.11b Radio Driver

When the mobile computer is first initialized, the radio driver for the 802.11b module is installed. Before using the radio, make sure that the 802.11b radio is powered up. For more information, see [The Radio Manager](#) on page 4-18.

### Configuring the 802.11b Radio

Dolphin 9500/9550 terminal loaded with an 802.11b radio contain a configuration utility that enables you to enter and save the optimal transmission settings.

### Accessing the Configuration Utility

You can access the configuration utility two ways:

1. Tap **Start > Settings > System tab > HHP WLAN Settings** .

This icon appears on the System tab only if there is an 802.11b radio installed on the terminal.

2. Tap the **Status** icon  - see [The Status Icon](#) on page 7-10.


### The Configuration Utility

The configuration utility consists of four tabs: Status, Config, Advanced, and About. Each tab is described in its own section in this chapter.

---

## Status Tab


HHP WLAN Settings always opens to the Status tab, which displays the current WLAN settings for 802.11b.

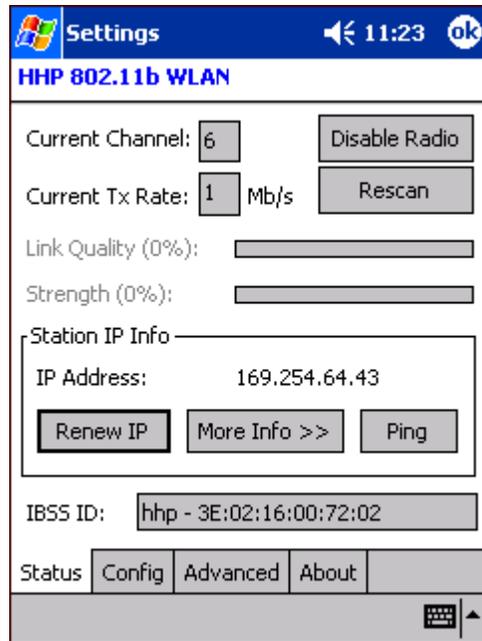

Field or Button	Description
<b>Current Channel</b>	Shows the RF channel currently used by the radio.
<b>Current TX Rate</b>	Shows the current transmit rate. This can be 1 Mbps, 2 Mbps, 5.5 Mbps, or 11 Mbps.
<b>Disable/Enable Radio</b>	Tap this button to disable/enable the radio.
<b>Rescan</b>	Tap this button to start a rescan process to search for an AP with a stronger signal in the network.
<b>Link Quality</b>	Displays the signal to noise ratio.
<b>Strength</b>	Displays the signal strength of the receiver.
<b>IP Address</b>	Displays the IP address of the radio. Verify configuration information with your network administrator.
<b>Renew IP</b>	Tap this button to reapply IP the address from the DHCP server when automatic DHCP is enabled.
<b>IBSS ID</b>	Shows the Network Name and the MAC address of: <ul style="list-style-type: none"><li>- the access point the radio is associated with in AP mode, or</li><li>- the creator of IBSS into which the radio is joined in peer-to-peer (Ad-Hoc) mode.</li></ul>


**More Info button**

Tap this button to display detailed TCP/IP information as shown in the following screen:

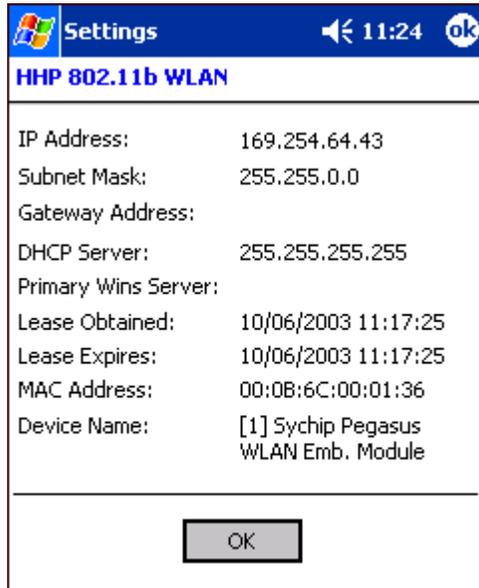

**Ping button**


Tap this button to open the Ping Utility for WLAN.

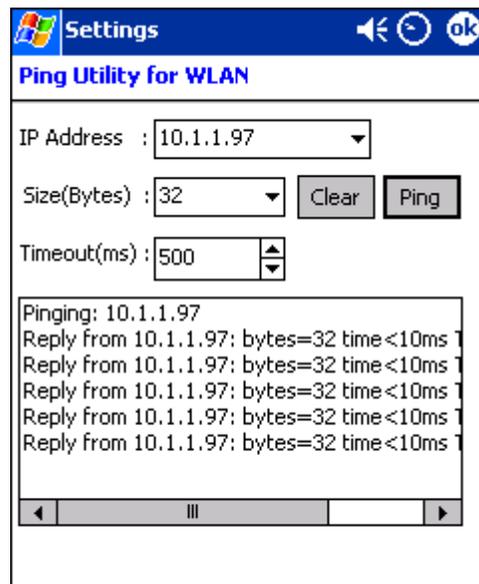

Field	Description
<b>IP Address</b>	Displays the current IP address. You can enter another IP address to ping.
<b>Size (Bytes)</b>	Displays the current bytes size; 32 is the default. You can select up to 8192 from the drop-down list.
<b>Timeout (ms)</b>	Displays the current timeout; 500 is the default. Increase or decrease it by tapping the up and down arrow buttons.
<b>Clear</b>	Tap this button to clear IP Address input and the ping statistics field.
<b>Ping</b>	Tap this button to ping the IP address entered in the input field.
<b>Ping Statistics</b>	Shows the pinging IP address and the pinging results.

## Config Tab

The Config tab provides a list of all access points and peer stations in range. Its configuration tool enables you to create and edit SSID profiles for access points that you want your station to associate with.

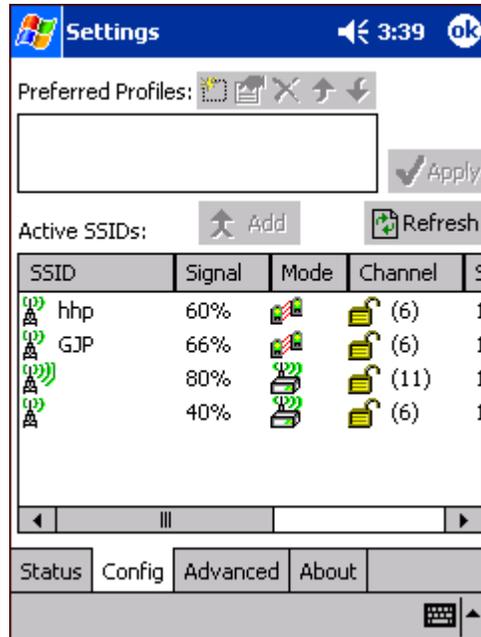

### Preferred Profiles

A list of preferred profiles for access points (AP) in the network created by the user, or added from the Active SSIDs table is located at the top of the Config window. When the radio is turned on, it searches for the APs with which to associate in the order of the listed profiles. For each profile in the table, one can make changes by using the icon tools at top of the table: **New**, **Edit**, **Delete**, **Up**, and **Down** (- the access point the radio is associated with in AP mode, or - the creator of IBSS into which the radio is joined in peer-to-peer (Ad-Hoc) mode. on page 7-2). This table is blank after the initial HHP software installation. It can be kept blank with no automatic association preference.

### Active SSIDs

The Active SSIDs table lists all access points or peer stations (creator of IBSS) in the vicinity of the host. It displays only those SSIDs that accept broadcast associations.

Each record displays information in the following six fields (The screen may not display all the fields in the following table. Use horizontal scroll bar to check all):

Column	This column displays...
<b>SSID</b>	The Network Name of the access point or peer station. An icon with signal strength  is also shown.
<b>Signal</b>	Strength in percentage for that SSID.
<b>Mode</b>	An icon shows whether it is an access point  , or a peer station  .
<b>Channel</b>	The channel it uses and the WEP method it applies, if any. The icon  stands for WEP Key-On, and  for WEP Key-Off.
<b>SupRate</b>	Supported data rate of the access point or the peer station.
<b>BSSID (MAC Addr)</b>	BSSID or MAC Address of the access point or the peer station.

### Apply

Tap **Apply** to associate your station with the SSID you selected.

This SSID can be either from the Preferred Profile table or from the Active SSIDs list. When applied, the Status tab window displays the status of the wireless connection. If the association failed, a search for another AP in the Preferred Profile list automatically takes place, and the radio attempts to associate with the station, in order of preference.

### Refresh

Tap Refresh to start a new search for all available access points or peer stations in the vicinity.

---

### Adding an Active SSID Profile to the Preferred Profile Table

1. Select an SSID from the Active SSID list.
2. Tap **Add**.  
If the SSID has WEP Key-On, the Settings window displays and prompts you to enter the WEP Method, Encryption Key, and Key ID.
3. Tap **OK** in the Settings window after finishing the configuration. The SSID and its profile are added into the Preferred Profiles window.  
If adding an SSID with WEP Key Off, the Settings window does not display and the SSID is added directly to the Preferred Profile table when you tap the **Add** button.

---


## Preferred Profile Icons

You can complete a number of tasks to manage your Preferred Profiles using the five icons at the top of the window:

Icon	Name	Tap this icon to...
	New	Create a profile.
	Edit	Modify a profile.
	Delete	Delete a selected profile.
	Up	Move the highlighted profile up to increase the automatic association priority.
	Down	Move the highlighted profile down to decrease the automatic association priority.

## To Create a New Profile

1. Tap the **New** button and the following screen displays:

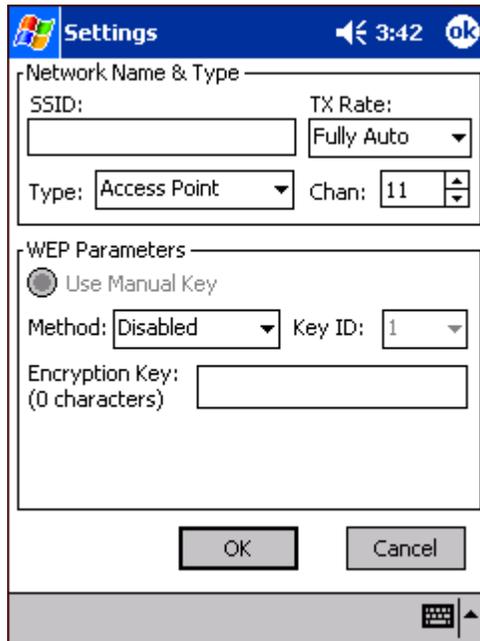


The screenshot shows a 'Settings' dialog box with a blue header bar containing the Windows logo, the title 'Settings', a speaker icon, the time '3:42', and an 'ok' button. The dialog is divided into two sections: 'Network Name & Type' and 'WEP Parameters'. In the 'Network Name & Type' section, there are fields for 'SSID:' (empty), 'TX Rate:' (set to 'Fully Auto'), 'Type:' (set to 'Access Point'), and 'Chan:' (set to '11'). In the 'WEP Parameters' section, there is a radio button for 'Use Manual Key' which is selected. Below it are 'Method:' (set to 'Disabled') and 'Key ID:' (set to '1'). There is also an 'Encryption Key:' field with '(0 characters)' below it. At the bottom of the dialog are 'OK' and 'Cancel' buttons. A keyboard icon is visible in the bottom right corner of the dialog.

2. Enter the values for the new profile in the information fields and tap **OK**.

---

## To Modify a Profile

Select one and tap the **Edit** icon. The following screen displays:

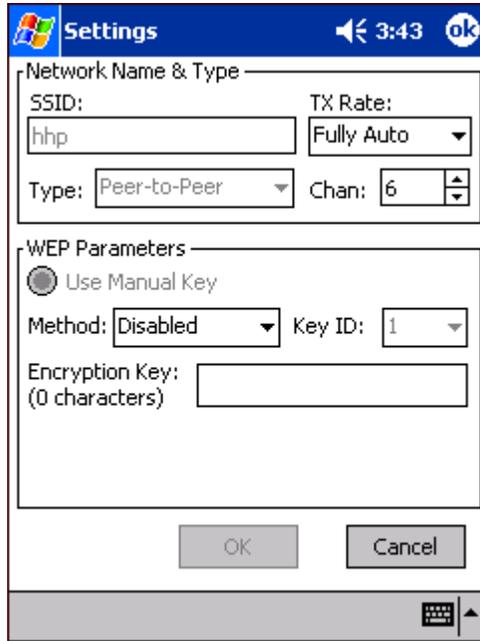


- SSID** To enter an SSID, which is the Network Name. Check with your network administrator for Network Name (SSID).
- Type** Choose Peer-to-Peer or Access Point from the drop-down list. Peer-to-Peer mode is used for communication between two (or more) radio stations (cards) without an access point. Access Point mode is also called "Infrastructure" mode.
- TX Rate** Choose the transmit rate from the drop-down list - 1MB, 2 MB, Auto 1/2 MB, 5.5 MB, 11 MB, or Fully Auto. The transmit rate is set to Fully Auto by default.
- Chan** Scroll to select a channel for communication.
- WEP Parameters** In this section, you configure the WEP Key for secure wireless communication. Within this block, you configure the WEP Method, Encryption Key, and Key ID.
- Use Manual Key** Manually input the encryption code for the WEP Key. This is the default setting.
- WEP Method** The options in this drop-down list determine what characters can be used to create the Encryption Key. Select one of the following five:
- | Option          | This option means that ...   |
|-----------------|--|
| Disabled        | WEP Key Off  |
| 64 bit (HEX)    | up to 10 characters are configurable in Hexadecimal for Encryption Key |
| 64 bit (ASCII)  | up to 5 characters are configurable in ASCII for Encryption Key        |
| 128 bit (HEX)   | up to 26 characters are configurable in Hexadecimal for Encryption Key |
| 128 bit (ASCII) | up to 13 characters are configurable in ASCII for Encryption Key       |
- HEX - Hexadecimal is a set of 16 characters from 0-9 and from A(a)-F(f).  
ASCII - ASCII means any printable ASCII character can be typed.
- Encryption Key** Character sets differ depending on the selected WEP method and key format.
- Key ID** Choose from the available options: Key 1 (Default), Key 2, Key 3, or Key 4. Check with your network administrator for the WEP Key and Key ID you need to use.
- Cancel** Tap this button to close the window without saving or modifying the profile.
- OK** Tap this button to make the change.

*Note:* The SSID, Type, TX Rate, and Channel fields are unchangeable in Access Point mode, whereas TX Rate and Channel fields can be changed in Peer-to-Peer mode.

---

## To Delete a Profile

Profiles may be deleted either from the Preferred List or from the Preferred List and Registry. To delete a profile, select (highlight) a profile and tap the **Delete** button and the following screen displays:

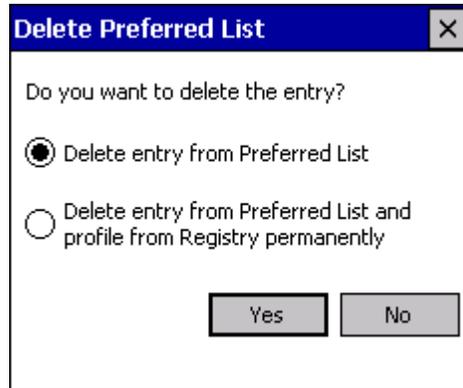


From the pop-up window select the option of your choice and tap **Yes** to confirm or **No** to cancel.

---

## Advanced Tab

On the Settings window, tap the **Advanced** tab. The following screen displays:

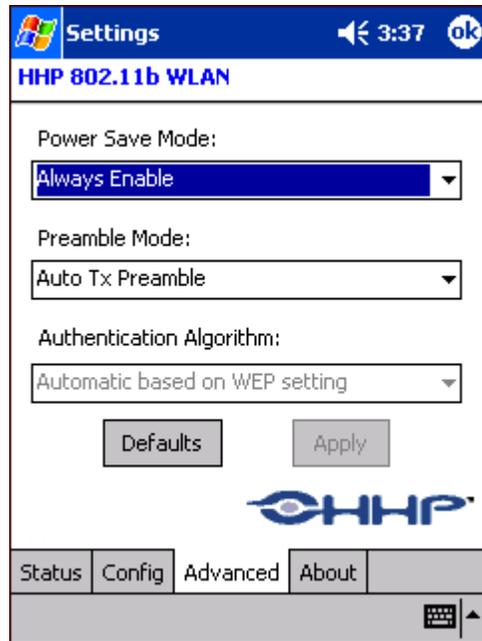

### Power Save Mode

- Disable                      Choosing this option disables the Power Save mode.
- Always Enable              Choosing this option makes the Power Save mode always enabled. This is the default setting.
- Auto Enable                Choosing this option means that the Power Save mode is automatically enabled when the internal battery powers the terminal and automatically disabled when an external power supply powers the terminal.

### Preamble Mode

- Long TX Preamble         Where Sync field consists of 128 bits.
- Short TX Preamble        Where Sync field consists of 56 bits.
- Auto TX Preamble        Automatically change between long and short preamble mode transmission based on the AP configurations. This is the default Preamble Mode.  
A Preamble consists of a Synchronization (Sync) field and a 16-bit Start Frame Delimiter (SFD) field.

### Authentication Algorithm

This drop-down list is active and configurable only when the WEP Key is enabled for the selected SSID profile.

- Automatic based on WEP setting    Default setting.
- WECA Compliant (always use Open)Not available in this release.
- Must use Shared with WEP         AP must use WEP method.


**Defaults**                      Resets all the settings to default values (Always Enable for Power Save Mode, Automatic based on WEP setting for Authentication Algorithm, and Auto TX Preamble for Preamble Mode).

**Apply**                         Applies the change to new card setting.

---

## About Tab

This window provides Version Number and time of build for Network Driver, Configuration Utility, and NIC Firmware. On the Settings window, tap the **About** tab.

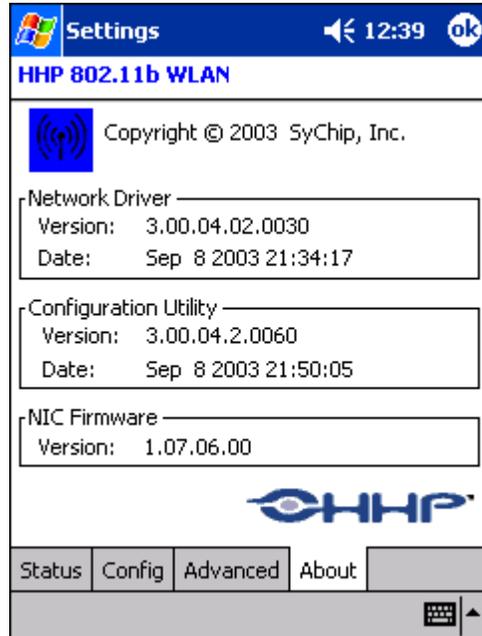

## The Status Icon

You access the 801.11b configuration utility by tapping and holding on the **Status** icon  in the task tray at the bottom of the screen. However, you must activate this icon before it appears.

### To Activate the Status Icon

1. Tap **Start > Programs**.

2. Tap the **HHP WLAN Settings** icon . This icon appears on the Programs window only if an 802.11b radio is installed.

3. The Status icon is now active in the bottom tray. When you tap it, a menu of configuration options appears.

## The Status Icon Menu

When you tap the Status icon in the bottom tray, the following menu displays:



Menu Option	Selecting This Option...
<b>Wireless Radio On</b>	Turns on the radio. LED is on and the Link Icon displays with signal strength.
<b>Wireless Radio Off</b>	Turns off the radio. A pop-up window will ask for your confirmation. If confirmed, the LED will be off and the Status icon will change color from green to red on the top without signal strength displayed. The WLAN card/module will stop functioning.
<b>Remove Status Icon</b>	<p>Removes the Status Icon from the bottom tray. A pop-up window asks you to confirm. Click <b>Yes</b> to confirm, or <b>No</b> to cancel.</p> <p>If confirmed, the Status icon does not display in the task tray, and you need to go to <b>Start &gt; Programs &gt; HHP WLAN Settings</b> to access the configuration utility.</p> <div data-bbox="950 945 1380 1386" style="border: 1px solid black; padding: 5px;"> <p><b>Settings</b></p> <p> If you remove the WLAN status icon, you must then use the Program/or Control panel to configure your WLAN.</p> <p>Do you want to remove the WLAN status icon from the Windows System Tray?</p> <p><input type="button" value="Yes"/> <input type="button" value="No"/></p> </div>
<b>Wireless Network Status</b>	Opens the Status tab of the configuration utility; see <a href="#">Status Tab on page 7-2</a> .
<b>Configuration</b>	Opens the Config tab of the configuration utility; see <a href="#">Config Tab on page 7-4</a> .
<b>Advanced Configuration</b>	Opens the Advanced tab of the configuration utility; see <a href="#">Advanced Tab on page 7-9</a> .
<b>Version Information</b>	Opens the About tab of the configuration utility; see <a href="#">About Tab on page 7-10</a> .

*Note:* The Status Icon changes to a crossed lock  as a warning that you may have entered a wrong key (WEP Key mismatch) for the WEP-On AP or a station.

---

## *802.11b Wireless Security Supplement*

AEGIS Client® offers the most comprehensive IEEE 802.1X supplicant for securing wired and wireless networks. The Client is a standards-based implementation of IEEE 802.1X and can be configured to work with almost any network equipment - wired or wireless - that supports the 802.1X authentication standard. The Client is interoperable with 802.1X-capable wireless access points and authentication servers including Microsoft's IAS and Cisco's ACS.

### *Installing the AEGIS Client Software*

#### **Preparation**

Installing and configuring AEGIS Client software usually takes less than 15 minutes, provided you have the required equipment, software, and configuration information. You need clear information from the network administrator about how the network's authentication works. Worksheets are provided below.

#### **System Requirements**

You need the following equipment and software to run AEGIS Client:

- A computer with a network interface card and/or wireless network interface card that support the NDIS 5.1 standard for 802.11 WLAN object identifiers (OID). **Be sure your wireless card is installed!** The AEGIS Client software installation routine expects to find your computer's wireless card properly installed, even if it isn't connected to a network. If the card isn't in the computer, the installation program can't make the proper program and protocol associations.
- The appropriate version of the AEGIS Client software package for your operating system. Contact HHP for the correct version for your company.

#### **Supported Operating Systems**

There are several versions of AEGIS Client software for computers using a wide variety of operating systems. However, specific capabilities of a particular version of AEGIS Client may vary. This is due to varying levels of support for different EAP types by manufacturers. Drivers for some types of network hardware and operating system combinations don't support as many EAP types as others combinations.

The Windows AEGIS Client software requires Pocket PC 2002, CE.NET 4.1, or higher.

#### **Required Network Configuration Information Worksheets**

The worksheets on the following pages help you prepare to install and configure the AEGIS Client.

Each worksheet provides space to record the AEGIS Client configuration information required to set up the client software to match a specific Extensible Authentication Protocol (EAP). The forms are designed so that hard copies can be filled out, copied, and distributed.

The client software supports the following EAP authentication methods:

- MD5
- LEAP
- TLS/SmartCard
- TTLS
- PEAP

There is a worksheet for each method. Complete the worksheet for the method you choose.

---

## MD5 Worksheet

To configure AEGIS Client to use MD5 authentication, you need to know:

1. Will you use your Windows user name and password for network authentication? (Applies only to Windows clients.)
2. If not, what is your unique user name/password combination?

If a second set of credentials is required, you need to know the exact user name and password. These are typically case-sensitive.

User name: \_\_\_\_\_

Password: \_\_\_\_\_

## LEAP Worksheet

To configure AEGIS Client to use LEAP authentication, you need to know:

1. Will you use your Windows user name and password for network authentication? (Applies only to Windows clients.)
2. If not, what is your unique user name/password combination?

If a second set of credentials is required, you need to know the exact user name and password. These are typically case-sensitive.

User name: \_\_\_\_\_

Password: \_\_\_\_\_

## TLS/SmartCard Worksheet

To configure AEGIS Client to use TLS/SmartCard authentication, you need to know:

1. Is a client certificate required?

\_\_\_ No.

\_\_\_ Yes. This file needs to be installed on your machine by your network administrator.

2. Should the AEGIS Client validate the server certificate chain?

\_\_\_ No. Skip Questions 3-4.

\_\_\_ Yes.

3. Will the server accept any trusted Certificate Authority (CA), or is a particular CA required?

\_\_\_ Any trusted CA is acceptable.

\_\_\_ A particular CA is required: \_\_\_\_\_

4. Are intermediate certificates allowed?

\_\_\_ No.

\_\_\_ Yes.

5. What is the name of the server? \_\_\_\_\_

This usually includes the server's domain, for example: server.big\_school.edu.

---

## TTLS Worksheet

To configure with TTLS authentication, you need to know:

1. Use Windows user name and password for authentication? (Applies only to Windows clients.)
2. If not, what is your unique user name? If a second set of credentials is required, you need to know the exact user name. This is usually case-sensitive.

User name: \_\_\_\_\_

3. Is a client certificate required?

\_\_\_ No.

\_\_\_ Yes. This file needs to be installed on your machine by your network administrator.

4. What is the user name (identity) and password for the tunnel authentication?

User name: \_\_\_\_\_

Password: \_\_\_\_\_

5. What is the tunnel authentication protocol?

\_\_\_ CHAP (Challenge Handshake Authentication Protocol)

\_\_\_ MS-CHAP (Microsoft CHAP Extensions)

\_\_\_ MS-CHAP v2 (Microsoft CHAP Extensions v. 2)

\_\_\_ PAP

\_\_\_ EAP-MD5

6. Is a server certificate is required?

\_\_\_ No.

\_\_\_ Yes.

7. Should the Aegis Client validate the server certificate chain?

\_\_\_ No. Skip Questions 8-9.

\_\_\_ Yes.

8. Will the server accept any trusted Certificate Authority (CA), or is a particular CA required?

\_\_\_ Any trusted CA is acceptable.

\_\_\_ A particular CA is required: \_\_\_\_\_

9. Are intermediate certificates allowed?

\_\_\_ No.

\_\_\_ Yes.

10. What is the name of the server?

This usually includes the server's domain, for example: server.big\_school.edu. \_\_\_\_\_

---

## PEAP Worksheet

To configure AEGIS Client with PEAP Authentication, you need to know:

1. Use Windows user name and password for authentication? (Applies only to Windows clients.)
2. If not, what is your unique user name? If a second set of credentials is required, you need to know the exact user name. This is usually case-sensitive.

User name: \_\_\_\_\_

3. Is a client certificate required?

\_\_\_ No.

\_\_\_ Yes. If it is, this file needs to be installed on your machine by your network administrator.

4. What is the user name (identity) and password for the tunnel authentication?

User name: \_\_\_\_\_

Password: \_\_\_\_\_

5. What is the tunnel authentication protocol?

\_\_\_ MS-CHAP v2 (Microsoft CHAP Extensions v. 2)

\_\_\_ EAP TLS/SmartCard

\_\_\_ Generic Token Card

6. Is a server certificate is required?

\_\_\_ No.

\_\_\_ Yes.

7. Should the Aegis Client validate the server certificate chain?

\_\_\_ No. Skip Questions 8-9.

\_\_\_ Yes.

8. Will the server accept any trusted Certificate Authority (CA), or is a particular CA required?

\_\_\_ Any trusted CA is acceptable.

\_\_\_ A particular CA is required: \_\_\_\_\_

9. Are intermediate certificates allowed?

\_\_\_ No.

\_\_\_ Yes.

10. What is the name of the server?


This usually includes the server's domain, for example: server.big\_school.edu. \_\_\_\_\_

---

## Configuring the Pocket PC Client

Because AEGIS Client enables your terminal to access a network that is protected by the IEEE 802.1X protocol, you must configure EAP data communication to match your network server parameters. If the EAP configuration doesn't match your network configuration, you can't access the network.

1. On the terminal, open the client by going to **Start > Programs > Meetinghouse AEGIS Client**. The Main screen opens displaying a list of ports on the system's network interface cards. You manage ports on this screen.

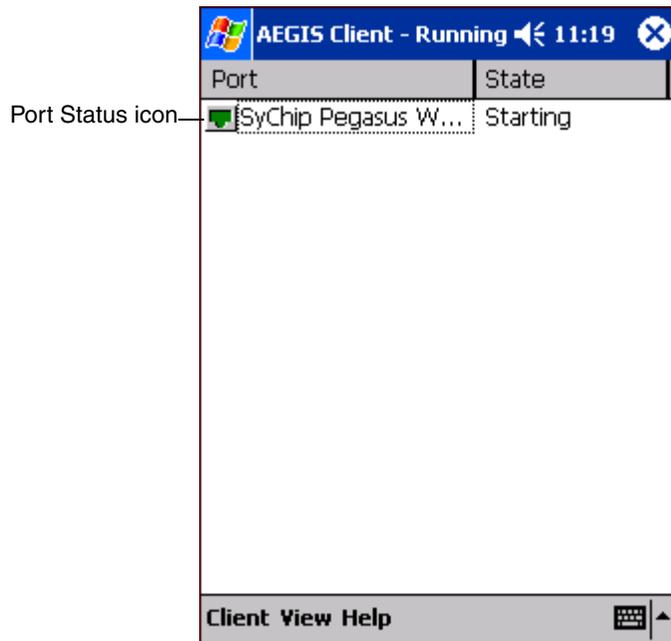


2. Tap the **Client** menu and select **Configure**. The Configuration Authentication screen appears displaying the User tab.



3. On the User tab

- In the **Identity** field, enter your network login or user name.
  - In the **Password** field, enter your network password.
  - If your network requires client certificates, select the **Use certificate** option and complete the information.
  - If the Authentication Type is PEAP or TTLS, select the **Tunneled authentication** option and enter the appropriate Identity, Password, and Protocol.
4. For most installations, you would skip the System tab, which controls system logging of network problems. Unless your set-up requires custom logging, accept the default logging settings. For more information, see [System Settings Tab](#) on page 7-20.
5. Tap the **Server** tab.

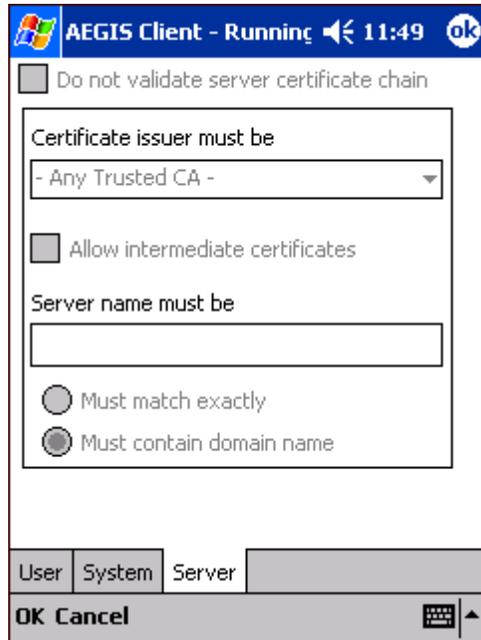

6. Depending on your authentication type, the Server tab
- may be entirely grayed-out (for instance, if you use MD5 authentication), or
  - you may need to enter server-related information that you've already gathered on your worksheet (for TLS, TTLS, and PEAP).
7. When you've entered the server information, tap **OK** to save the configuration and close the window.

## Running AEGIS Client

After you finish the initial configuration, tap the network interface and select **Start** (if the port is already active, select **Stop** first, then **Start** to force the program to read the new configuration file). On the main screen, you should see the port color and status change as the port starts authentication, negotiates with the access point and/or authentication server, and then joins the network.

As the network interface starts or stops, the color of the port icon and the status field in the Interface List updates to reflect the current state of the interface.

### Port Status Icon Table

Icon	Color	This color icon indicates that ...
	Gray	The port is not in use or is disabled. Either the AEGIS Client isn't running, or the port is not bound to the 802.1X protocol.

---

## Port Status Icon Table

Icon	Color	This color icon indicates that ...
	Orange	The port is associated, but there is no response to 802.11b packets.
	Blue	There is no 802.11b activity.
	Green	Authentication succeeded.
	Yellow	Authentication is in process.
	Red	Authentication failed.

## *Configuring the AEGIS Client Software*

Configuration takes place at several levels:

- First, each interface that interacts with the AEGIS Client may need to be configured.
- Second, each user account on the computer needs its own unique authentication settings. Because Pocket PC devices are usually small devices with a single NIC and, usually, a single user, the initial configuration is usually the only time the software needs to be set up. The Client will need to be reconfigured if the device is used on multiple networks, or if different users share the computer.
- Third, each port may need to have its default settings changed.

The Configuration screen has three tabs:

1. **User** settings tab - where you configure the authentication credentials.
2. **System** settings tab - where you set the level of detail that the Client will provide in the system log.
3. **Server** identity tab - used only for the TLS, TTLS, and PEAP authentication methods. It tells the Client what server credentials to accept from the authentication server to verify the server.

---

## User Settings Tab

The User settings tab defines the protocol and the credentials used to authenticate a user.

### Identity

The 802.1X identity supplied to the authenticator. The identity value can be up to 63 ASCII characters and is case-sensitive. In TTLS and PEAP, it is recommended that this field not contain a true identity, but instead the identity “anonymous”, and any desired realm (e.g. anonymous@myrealm.com).

### Password

The password used for MD5-Challenge or LEAP authentication. It may contain up to 63 ASCII characters and is case sensitive.

### Authentication

Valid entries are MD5-Challenge, LEAP, PEAP, TLS, or TTLS authentication.

### Certificate

The client certificate used with TLS or if TTLS or PEAP is selected and optional client authentication is activated. When specifying a client certificate, do not enable strong private key protection. If you enable strong private key protection for a certificate, an access password must be entered for the certificate each time it is used. This means the 802.1X service will fail authentication because it is invoked by the computer before a user is logged on, which means that a password won't be provided.

### Use certificate area

This box is an option for TTLS and PEAP. It causes the AEGIS Client to make the client certificate specified in the “Client Certificate” box available to the RADIUS server for an optional verification.

### Tunneled authentication area

The following Tunneled Authentication parameters are used by only by TTLS and PEAP protocols, in phase 2 of authentication, and after the secure tunnel has been established.

### Identity

The user identity used in phase 2 authentication. The identity specified may contain up to 63 ASCII characters, is case-sensitive and takes the form of a Network Access Identifier, consisting of <name of the user>@<user's home realm>. The user's home realm is optional and indicates the domain to which the tunneled transaction is to be routed.

### Password

The password used for the tunneled authentication protocol specified. It may contain up to 63 ASCII characters and is case sensitive.


### Protocol

This parameter specifies the authentication protocol operating within the secure tunnel. The following protocols are presently supported for TTLS: EAP-MD5, CHAP, PAP, MS-CHAP and MS-CHAP-V2. For PEAP the supported protocols are EAP-TLS, EAP-MS-CHAP-V2, and GTC.

---

## System Settings Tab

The System Settings tab controls logging and the port manager timeout period.

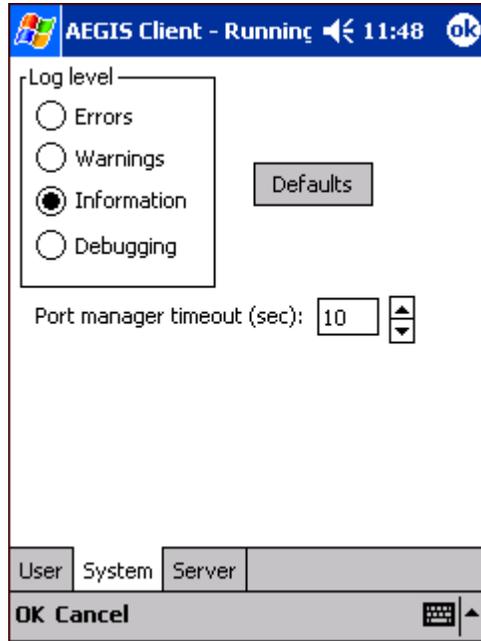

### Log Level

These settings control the detail of the log messages generated by the AEGIS Client. By default, all errors, warnings, and information events are logged. Each entry records a severity code (of one [debug message] to four [error] asterisks), a time stamp, and a message.

Logs fill memory quickly, especially if the Debugging level is chosen. Do not use the Debugging option for a significant length of time because most internal operations generate messages.


### Port Manager Timeout

The interval at which the client polls the ports. This is used under different circumstances, for instance after physical changes such as card removal or insertion have been detected. This value should not be changed from the 10-second default unless so advised by technical support.

---

## Server Identity Tab

The Server identity tab defines the credentials the client uses to authenticate the server during TLS/TTLS/PEAP authentication message exchange. AEGIS Client uses the information entered on this screen to verify that the Client is communicating with a trusted server.

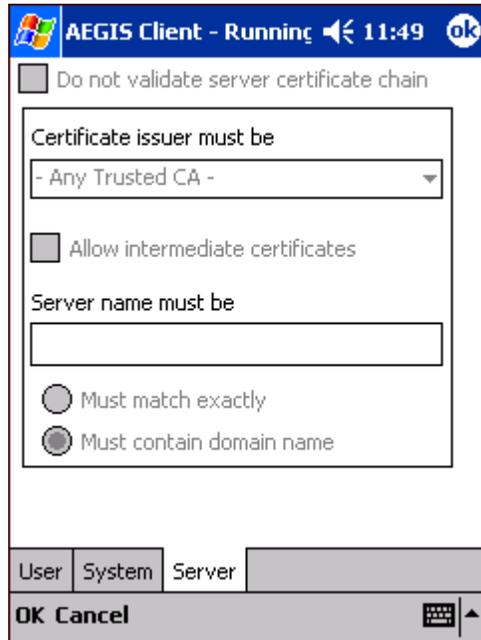

### Do not validate server certificate chain

When the server certificate is received during the TLS/TTLS/PEAP message exchange, it is not validated.

### Certificate issuer must be

The server certificate received during TLS/TTLS/PEAP message exchange must be issued by the certificate authority selected in this field. Both trusted intermediate certificate authorities and root authorities whose certificates exist in the system store are available for selection in the drop-down list. If Any Trusted CA is selected, any Certificate Authority (CA) in the drop-down list can be used during authentication.

### Allow intermediate certificates

Selecting this option enables a number of unspecified certificates to be in the server certificate chain between the server certificate and the certificate authority indicated in the **Certificate issuer must be** field. This allows the server certificate received during negotiation to be issued directly by the certificate authority indicated in the **Certificate issuer must be** field or by one of its intermediate certificate authorities. If disabled, then the selected Certificate issuer must be must have directly issued the server certificate.

### Server name must be

The server name, or a domain to which the server belongs, depending on which of the two fields below has been checked.

### Must match exactly

When activated, the server name entered must match exactly the server name found on the certificate.

### Must contain domain name

When activated, the server name field identifies a domain and the certificate must have a server name belonging to this domain or to one of its sub-domains (e.g., zeelans.com, where the server is blueberry.zeelans.com).

---


## Port Setting Menus

To see or manage the wireless cards or Ethernet NICs controlled by the Client, go to **Start > Programs > Meetinghouse AEGIS Client**. The Main menu contains a list of wireless and NIC adapters (ports). Tapping a port brings up a menu that allows the port to be enabled or disabled, configured, or deleted.

Two menus are available from this screen: the Port menu and the Client menu.

### Port Menu

To open the Port menu, tap and hold on a port on the main screen.

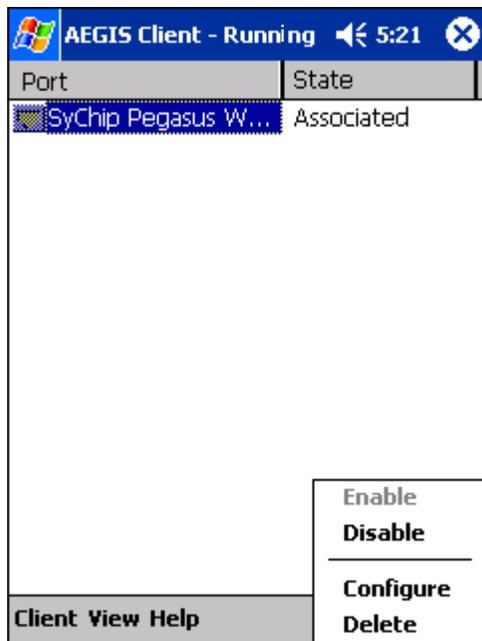

These commands allow the port to use 802.1X authentication, change the port configuration, and remove it from the port list. The Port menu commands are:

**Enable and Disable** These commands enable or disable 802.1X authentication on the port. The port itself is not turned off or on; to do that, use the Windows Network Connections control panel.


**Configure** Opens the port configuration screen.

**Delete** Removes an adapter from the port list. When the 802.1X protocol binds to an adapter, it is added to the port list. This usually happens when the adapter is in the device and the Client software is installed, or Install Protocol is selected from the Client menu.

---

## Client Menu

To open the client menu, tap Client in the command bar along the bottom of the window.

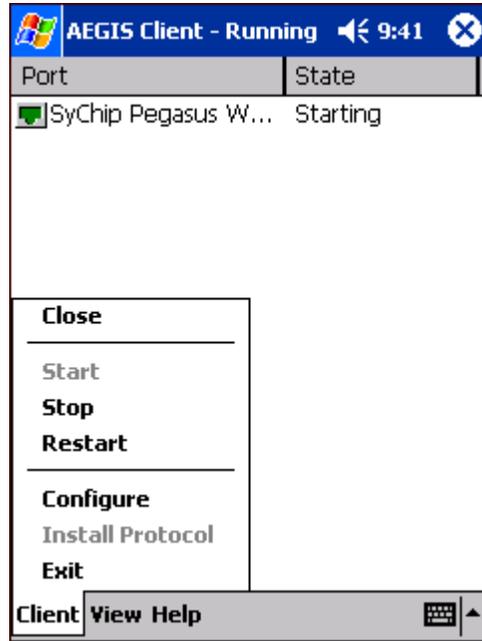


<b>Close</b>	Closes the Client's interface, while leaving the client running.
<b>Start/Stop</b>	Starts or stops 802.1X authentication.
<b>Restart</b>	Same as a Stop followed by Start.
<b>Configure</b>	Opens the Configuration screen displaying the User tab.
<b>Install Protocol</b>	Selecting this option binds the 802.1X protocol to the WLAN adapter currently installed on the device. The WLAN adapter then appears in the port list. For more information about network adapters, see <a href="#">Network Adapters</a> on page 5-28.
<b>Exit</b>	Terminates the client, which stops the 802.1X protocol.

---

## Port Setting Parameters

Port settings parameters rarely need to be modified from their defaults. In most cases, you should modify these settings only if advised to by technical support. Port Settings are global to all ports.

To open the Port Settings screen, select any adapter in the port list, tap and hold, then select **Configure** on the Port menu. The Port Settings screen is displayed.

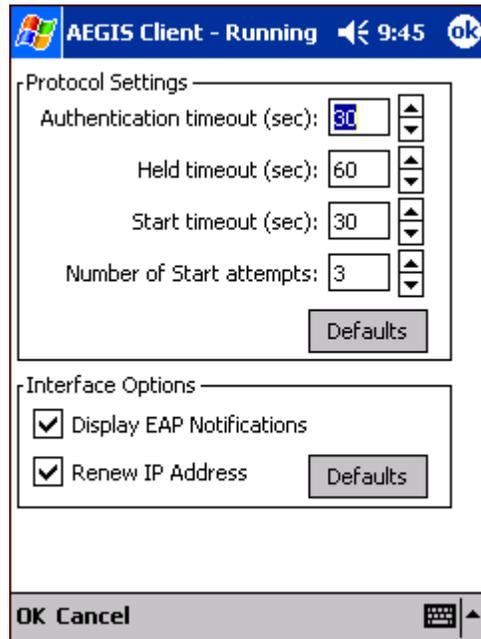

### Protocol Settings

These are the timer intervals and retry settings defined in the 802.1X standard supplicant protocol specification. They determine how long the supplicant state machine will wait in a given state. These parameters shouldn't be modified without an understanding of the supplicant state machine. For more information about the supplicant state machine, obtain its 802.1X protocol specification.

The parameters are:

- **Authentication Timeout.** The period of time the Client remains in the authenticating or acquired state without receiving a response from the access point or switch.
- **Held Timeout.** The period of time the Client remains in the held state after failing authentication.
- **Start Timeout.** The period of time the Client remains in the connecting state before restarting when there is no response.
- **Number of Start Attempts.** The number of times the Client restarts before giving up. At that point, the Client then defaults to the authenticated state, but there will be no network connectivity because the protocol exchange was never completed.

The Interface Options are:

### Display EAP notifications

This specifies that the EAPOL notification message will be displayed to the user. An authenticator may use such notification to inform you, for example, about a near password expiration. However, some authenticators send chatty and annoying notifications that may, for the convenience of the user, be suppressed. Note that all notifications are written to the event log even if they are not displayed.

### Renew IP address

With this option enabled, the Client initiates a DHCP request to obtain a dynamic IP address after a successful authentication, but only if the client detects that the connected network (the SSID) has changed. The result is that renewal should not occur upon reauthentication, but does occur at boot or when connecting to a different network. If you have a slow authenticator, you may wish to enable this option when configuring the service because the slow authenticator may prevent you from getting a DHCP-assigned IP address upon boot-up. This option is ignored if the given adapter has a static IP address.

---

## Certificate Management

During configuration, you may have specified one or two certificates to use during the authentication process. The specified identity should match the **Issued to** field in the certificate and should be registered on the authentication server (i.e., RADIUS server) that is used by the authenticator. In addition, your certificate must be valid on the authentication server. This requirement depends on the authentication server and generally means that the authentication server must know the issuer of your certificate as a trusted Certificate Authority.

If the selected certificate does require a password or pass phrase to decode the private key, enter this value in the “Certificate Pass Phrase” field. This value will be encrypted when the configuration is saved.


However, on some systems, there may not be a certificate. If that is the case, you can use the section below as a primer on OS X certificate management.

### Installing Certificates with CertAdd

Pocket PC doesn't have a native certificate store. The CertAdd utility is supplied with the AEGIS Client to select and install certificates on a Pocket PC device. Client or Certificate Authority certificates can be imported from \*.cer (same as \*.der), \*.p7b, or \*.pfx files.

To install certificates on a Pocket PC device:

1. Download the certificate to the device. The location isn't critical, although you may want to create a standard folder for consistency.
2. Go to **Start > Programs > Meetinghouse Certificates**. The opening screen is displayed.

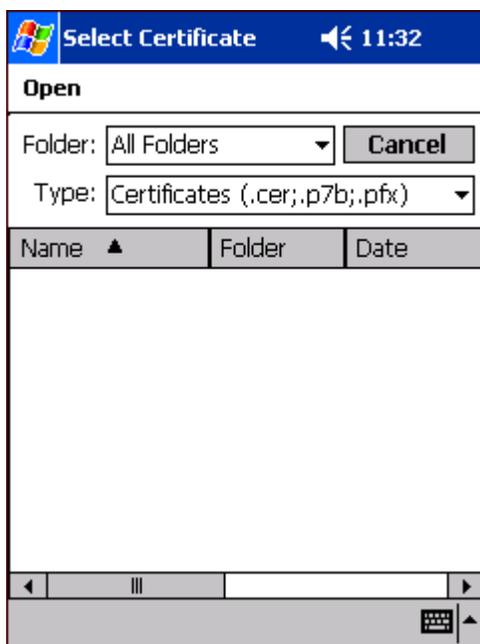

3. In the **Folder** drop-down list, select the folder containing the certificate(s). Any files of the valid file types in the selected folder are listed in the lower pane of the CertAdd screen.
4. Select a certificate from the list. A pop-up will ask if you want to install the certificate.
5. Tap **OK**. The certificate is loaded in the correct certificate store.



## Wireless PAN Communications with Bluetooth

### Overview

Dolphin 9500/9550 terminals are available with a Bluetooth radio for (Wireless Personal Area Network) WPAN usage. When the mobile computer is first initialized, the \*.cab file and module for Bluetooth are installed.

### Powering Up the Bluetooth Radio Driver

Before using the radio, make sure that the Bluetooth radio is powered up. When the radio driver is powered up, the Bluetooth icon appears in the task tray on the Today screen.




Radios are powered up in the Radio Manager utility; see [Powering Up a Radio](#) on page 4-18.

### Setting Up Your Bluetooth Card

*Note:* If you use the Get Connected! Wizard, which is recommended for normal usage, then this step is not necessary. This step would be used to change the friendly name of your mobile computer.

1. Tap the Bluetooth icon that appears in the task tray on the Today screen . If you installed OBEX, the menu also lists Transfer via Bluetooth.
2. In the pop-up menu, select **Advanced Features**, then **My Bluetooth Device**.

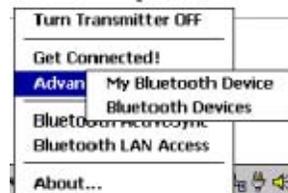

3. In the **My Bluetooth Device** screen, you can modify the **Friendly Name** and make any desired configuration changes. When done, tap **OK**.




- In normal phone connect operation, **Discoverable** mode is not needed and should be disabled.
- If you do enable **Discoverable** mode (e.g., for ActiveSync), note that it does not shut off by itself. To save power, remember to disable it when not needed.
- **Connectable**, **Use Authentication**, and **Use Encryption** are also not required for printing or dial-up networking applications.
- Check Use **Authentication** to enable the **Use Encryption** option.

---

## Assign COM Ports

Follow these steps to view and/or modify the Bluetooth COM ports. If you are not going to use the IrDA port, you can disable it to free up a port for Bluetooth devices; see [IrDA Config](#) on page 5-7.

1. Tap on the Bluetooth icon on the Today screen. Select **Advanced Features** then **My Bluetooth Device**.

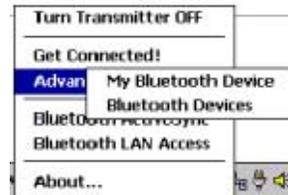

*Note:* If you installed OBEX, the menu also lists Transfer via Bluetooth.

2. The **My Bluetooth Device** screen appears. Tap on the **COM Ports** tab.



3. As needed, view and/or enable/disable the Bluetooth COM port assignments. Tap **OK**.



*Note:* The Bluetooth Phone port cannot be disabled. For more information about COM ports, see the [Com Port Assignment Table](#) on page A-12.

---

## Discover Bluetooth Device(s)

Follow these steps to discover other Bluetooth devices nearby, including non-phone devices. The Device Discovery Wizard is a more detailed alternative to using the Bluetooth "Get Connected!" Wizard or Bluetooth ActiveSync or Bluetooth LAN Access options. The Device Discovery Wizard allows you to discover any type of Bluetooth device.

1. If not open, launch the **Bluetooth Devices** folder. Tap on the Bluetooth icon on the **Today** screen. Select **Advanced Features** then **Bluetooth Devices**.
2. In the **Bluetooth Devices Folder**, tap on the **Device Discovery** icon. Or you can tap on **Tools**. In the pop-up menu, select **Device Discovery**.
3. Follow the Bluetooth Device Discovery Wizard to search for Bluetooth devices nearby. When prompted, select the device type you seek.



4. When the search is complete, a screen reports the discovered Bluetooth devices. Check the box next to any device you wish to save information about, (i.e., any devices you wish to connect to). Tap **Next**.



5. A service discovery phase begins, 5-10 seconds per chosen device.
6. In the next screen, tap **Finish**.

## Bond With Discovered Device(s)

Follow these steps to bond with an already discovered Bluetooth device. In most cases, bonding is for establishing secure communications with a Bluetooth-enabled phone. This is a more detailed alternative to using the Bluetooth "Get Connected! Wizard."

### Important!

- Do not try to bond with a Motorola Timeport 270C or Nokia 6310!
  - Do not use this method to bond with a printer! The third-party printing software included on the installation CD also handles bonding.
1. If not open, launch the **Bluetooth Devices** folder. Tap on the Bluetooth icon in the Today screen. Select **Advanced Features**, then **Bluetooth Devices**.

---

2. Tap and hold your stylus on the Bluetooth device you want to bond with. In the pop-up menu, select **Bond**.



3. Alternatively, after selecting a device, tap on the **Bond** icon. Or tap on **Device**, then select **Bond**.



4. The **Bluetooth Device Bonding Wizard** launches. Follow the wizard to bond with your selected device.



5. As prompted, make sure the Bluetooth device that you want to bond with is in *Bondable* mode.



6. If the remote device is set up to accept bonding, a **Bluetooth Passkey** screen appears. To continue bonding, enter the correct passkey and tap **Reply**.




7. When you have successfully bonded with the other device, tap **Finish**.

### *View Device Properties*

Follow these steps to view the properties of an already discovered device.

1. If not open, launch the **Bluetooth Devices** folder. Tap on the Bluetooth icon on the Today screen. Select **Advanced Features** then **Bluetooth Devices**.
2. Select a device. Tap on the **Properties** icon, or tap on **Device** then select **Properties**. Alternatively, you can tap and hold your stylus on the Bluetooth device you want to view information about. In the pop-up menu, select **Properties**.

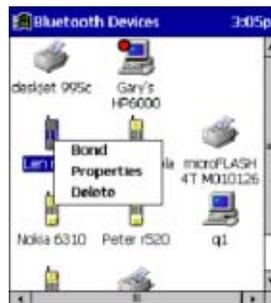

- 
3. Use the **General** and **Services** screens to research device properties. If needed, assign a new device type icon by tapping on the arrow buttons in the **General** screen. You can also use the **Device name** field to rename the device. When done, tap **OK** for the setting to take effect.



### *Set Up Your Favorite Device*

Follow these steps to set up default devices in the **Bluetooth Devices** folder. Please note that the Get Connected! Wizard automatically assigns the favorite phone.

Complete these steps:

1. Tap on **Tools** and select **My Favorites**.
2. Tap on the tab for the type of device you would like to set a favorite for. If needed, use the arrow buttons to scroll and find the tab you need.



*Note:* Tabs appears only for COM ports you have enabled. To enable a port, refer to the "Assign COM Ports" section earlier in this chapter.


3. To select a favorite device, select **Use the favorite selected above**. In the drop-down list, select your device. Tap **OK**.
4. After setting a device as your favorite, its icon appears in the Bluetooth Devices folder with a heart next to it.

### *Change Views*

You can switch between the **Large Icons** or **Details** views for the **Bluetooth Devices** folder.

1. In Bluetooth Devices, tap on **View**.

2. In the pop-up menu, choose between **Large Icons** or **Details**.

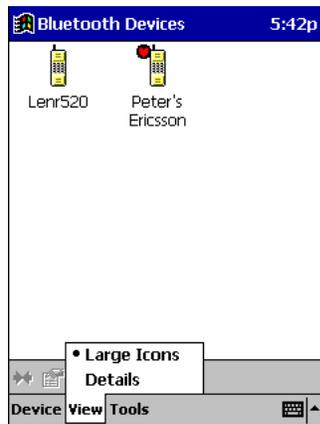

Large Icons



Details

*Note:* In Details view, you can see the Device Class and scroll right to see the current Bonded status.

### ***Delete a Device From the Folder***

If you no longer plan to connect with it, you can delete a device from the **Bluetooth Devices** folder.

1. If not open, launch the **Bluetooth Devices** folder.
2. Tap and hold your stylus on the device you wish to delete. In the pop-up menu, select **Delete**.



3. Alternatively, after selecting a device, tap on the **Delete** icon. Or tap on **Device** then select **Delete**.

4. A Confirm screen appears. Tap **Yes**.



---

## *Turn Radio Transmitter ON/OFF*

You may want to turn off the radio transmitter to save power or if you are entering an area with radio restrictions (e.g., an airplane).

1. The Bluetooth icon should appear in the task tray on the **Today** screen. Tap on the icon.
2. In the pop-up menu, select **Turn Transmitter OFF**.



3. The Bluetooth Card radio transmitter shuts off. The Bluetooth icon in the task tray becomes gray, as well as relevant menu options (e.g., Get Connected!).
4. To turn the radio transmitter back on, tap on the gray **Bluetooth** icon. In the pop-up-menu, select **Turn Transmitter ON**.

---

## Bluetooth ActiveSync

This section explains how to use the Bluetooth ActiveSync feature. It helps you quickly and easily ActiveSync to a notebook or desktop computer with ActiveSync v3.x installed.

1. Tap on the **Bluetooth** icon. In the pop-up menu, select **Bluetooth ActiveSync**.



2. The next screens varies depending on if your Bluetooth Devices folder contains any computers, and if one is chosen as your favorite. Please refer to the appropriate scenario:

**SCENARIO #1:** Your Bluetooth Devices folder contains a favorite desktop computer.


- (a) When you tap **Bluetooth ActiveSync**, your mobile computer automatically tries to connect to your favorite computer.
- (b) The Connect To screen appears, reporting that it is trying to connect to Wireless ActiveSync.



- (c) After a successful connection is made, the status screen reports Connected. Now you are ready to synchronize files, if desired.

**SCENARIO #2:** Your Bluetooth Devices folder contains no favorite desktop computer.

- (a) When you tap on **Bluetooth ActiveSync**, a screen appears that allows you to choose which computer to connect to in your Bluetooth Devices folder. Choose a computer from the list and tap Select, or tap **Find** to search for another computer.

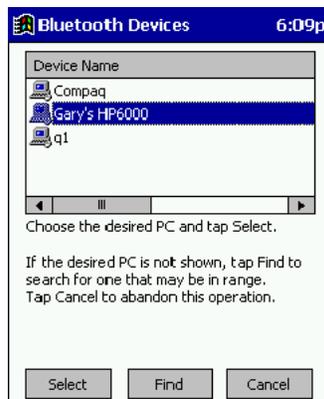

*Note:* If the computer you want to connect to is not listed, tap **Find** to begin a search. Proceed as described in Scenario #3 on page 8-10.

- (b) Your mobile computer attempts to connect to your selected computer.



- 
- (c) After a successful connection is made, the status screen reports Connected. Now you are ready to synchronize files, if desired.




**SCENARIO #3:** Your Bluetooth Devices folder contains no computers.

- (a) When you tap on **Bluetooth ActiveSync**, a Bluetooth Device Search automatically begins.



*Note:* You can also start the device search by tapping Find in the Bluetooth Devices screen.

- (b) After the search is complete, select the computer you wish to ActiveSync with and tap **Select**. If the computer is not listed, make sure the computer id discoverable and tap **Refresh** to search again.

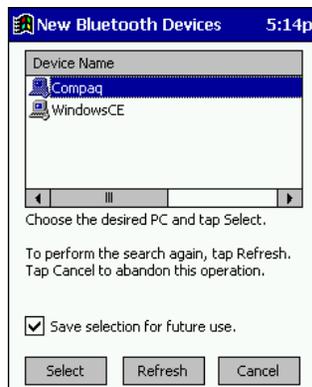

- (c) After you tap **Select**, a service discovery phase begins.  
(d) The Connect To screen appears, reporting that it is trying to connect to Wireless ActiveSync.



- (e) After a successful connection is made, the status screen reports Connected. Now you are ready to synchronize, if desired.

---

## Bluetooth LAN Access

This section explains how to use the Bluetooth LAN Access feature to quickly and easily connect to a Bluetooth-enabled LAN access point.

1. Tap on the **Bluetooth** icon. In the pop-up menu, select **Bluetooth LAN Access**.



2. The next screens varies depending on if your Bluetooth Devices folder contains any access points, and if one is chosen as your favorite. Please refer to the appropriate scenario:

**SCENARIO #1:** Your Bluetooth Devices folder contains no favorite access point.

- (a) When you tap Bluetooth LAN Access, a screen appears that allows you to choose which access point to connect to in your Bluetooth Devices folder. Choose an access point from the list and tap **Select**.



*Note:* If your access point is not listed, tap Find and proceed as described in Scenario #3.

- (b) Your mobile computer tries to connect to the selected access point.



- (c) If your LAN requires a passkey, a screen appears asking for the passkey. Enter the passkey, then tap **OK**.
- (d) After a successful connection is made, the status screen reports Connected.



- (e) Now you are ready to access your LAN for Internet access, files, etc.

**SCENARIO #2:** Your Bluetooth Devices folder contains a favorite access point.

- 
- (a) When you tap **Bluetooth LAN Access**, your mobile computer automatically tries to connect with your favorite access point.



- (b) If your LAN requires a passkey, a screen appears, asking for the passkey. Enter the passkey, then tap **OK**.  
(c) After a successful connection is made, the status screen reports Connected.



- (d) Now you are ready to access your LAN for Internet access, files, etc.

**SCENARIO #3:** Your Bluetooth Devices folder has no access points.

- (a) When you tap **Bluetooth LAN Access**, the mobile computer automatically begins to search for new Bluetooth devices.



*Note:* You can also start the device search by tapping Find in the Bluetooth Devices screen. See Scenario #2 on page 8-9.

- (b) After the search is complete, select the access point you wish to connect to. Tap **Select**. If the access point is not listed, tap **Refresh** to search again.



- (c) After you tap **Select**, a service discovery phase begins.



- (d) If the LAN requires a Passkey, a screen appears, asking for the Passkey. Enter the Passkey, then tap **OK**.

---

(e) After a successful connection is made, the screen reports Connected.



(f) Now you are ready to access your LAN for Internet access, files, etc.

---

## OBEX

This section explains how to use the OBEX (object exchange) application to trade business cards, contacts or files with another Bluetooth device that supports OBEX.

Bluetooth OBEX application supports five operations:

- Exchange Business Cards
- Send a Contact
- Send a File
- Browse Remote Device
- Receive Contact or File
- Enable File Sharing

The first four operations - exchange business cards, send a contact, send a file, and browse remote device - are client-oriented. They involve initiating an object exchange.

The last two operations - receive contact or file and enable file sharing - are server-oriented. They involve accepting objects in an exchange initiated by another Bluetooth device.

### *Exchange Business Cards*

1. Make sure both Bluetooth devices have a business card assigned to them.

*Note:* If each device does not have a business card assigned to it, you cannot exchange business cards.

To assign a business card to your mobile computer, do the following:

- Tap on the **Bluetooth** icon. In the pop-up menu, tap **Advanced Features > My Bluetooth Device**.
- Tap on the **Object Sharing** tab. Under My business card, tap **Assign**



- In the next screen, select your business card and tap **OK**. If your business card is not listed, tap **Contacts** to create one.




When you return to the Object Sharing screen, tap **OK**.

---

2. Make sure the other Bluetooth device is set up to receive a contact. The device must support the OBEX Object Push profile.

*Note:* If the other device is also using the Bluetooth Connection Kit, you can set it up to receive a contact by tapping the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Receive Contact or File**.

3. Now you are ready to exchange business cards. Tap on the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Exchange Business Cards**.

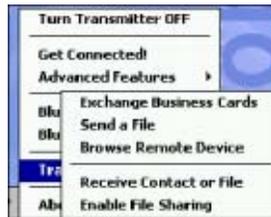

4. If your mobile computer has no devices in the Bluetooth Devices Folder, then it begins to search for Bluetooth devices nearby.

5. Select the Bluetooth device you wish to exchange business cards with. If the device is not listed, tap **Find**.



6. Your mobile computer begins to exchange business cards. After the exchange, the new business card should appear in your Contacts list.




## ***Send a Contact***

1. Make sure the other Bluetooth device is set up to receive a contact. It must support the OBEX Object Push server profile. Refer to the documentation that came with the device for instructions.

*Note:* If the other device is also using the Bluetooth Connection Kit, you can set it up to receive a contact by tapping the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Receive Contact or File**.

2. Now you are ready to send a contact. Go to your Contacts folder.

3. Tap and hold your stylus on the contact(s) you would like to send. In the pop-up menu, select **Send Via Bluetooth**.

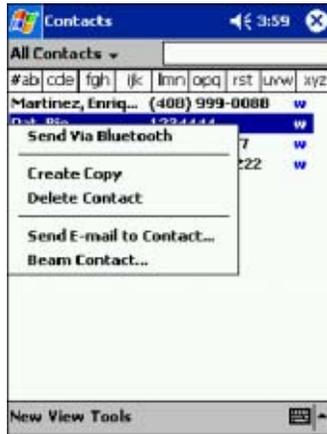

4. If your mobile computer has no devices in the Bluetooth Devices Folder, then it begins to search for Bluetooth devices nearby.



5. Select the Bluetooth device you wish to send the contact(s) to. If the desired device is not listed, tap **Find**.



6. Your mobile computer processes and send the contact(s).




## Send a File

1. Make sure the other Bluetooth device is set up to receive a file. It must support the OBEX Object Push server profile. Refer to the documentation that came with the device for instructions.

*Note:* If the other device is also using the Bluetooth Connection Kit, you can set it up to receive a file by tapping the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Receive Contact or File**.

2. Now you are ready to send a file. Tap on the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Send a File**.

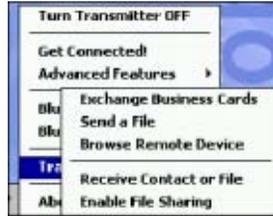


3. If your mobile computer has no devices in the Bluetooth Devices Folder, then it begins to search for Bluetooth devices nearby.



4. Select the Bluetooth device you wish to send a file. If the desired device is not listed, tap **Find**.




5. In the next screen, tap on the file you wish to send. You can use the **Folder** and **Type** drop-down menus to search for your file. Also, you can scroll horizontally to view the folder, date, size, type, and location of each file.

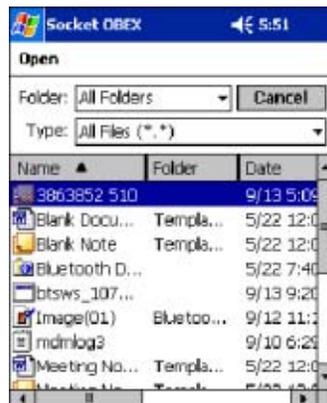

---

6. Your mobile computer sends the file.

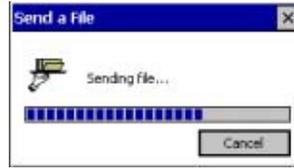

### ***Browse Remote Device***

The Bluetooth File Explorer lets your mobile computer share files with another Bluetooth device. The other device must support the OBEX File Transfer server profile.

This section covers the following file transfer operations:

- Prepare for file transfer
- Send/receive file(s) or folder(s)
- Create a folder
- Delete file(s) or folder(s)
- Refresh remote view
- Connect/disconnect
- Exit the program


*Note:* “Local device” refers to the mobile computer you are running the OBEX from. “Remote device” refers to the Bluetooth device you are trying to transfer files with.

#### **Prepare for File Transfer**

1. Make sure the remote device has file sharing enabled. It must support the OBEX File Transfer server profile.

*Note:* If the other device is also using the Bluetooth Connection Kit, you can enable file sharing by tapping the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Enable File Sharing**.

2. Now you are ready to browse the remote device. Tap on the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Browse Remote Device**.

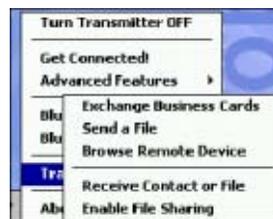

3. If your mobile computer has no devices in the Bluetooth Devices Folder that supports OBEX File Transfer, then it begins to search for Bluetooth devices nearby.



---


4. Select the Bluetooth device you wish to browse. If the desired device is not listed, tap **Find**.



5. Your mobile computer begins to establish a file sharing connection.




6. After the devices successfully connect, the Bluetooth File Explorer appears. Half of the screen shows contents of the remote device, while the other half shows contents of your device (the local device). The very bottom of the screen reports the connection status.

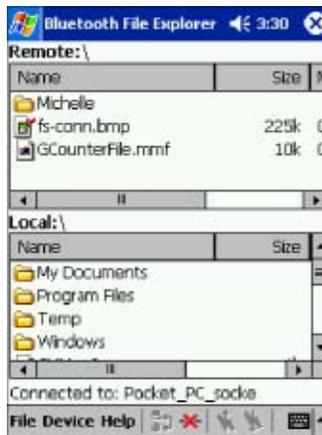

### Send/Receive File(s) or Folder(s)

- Single-tap items to select them for transfer.
- Double-tap on a folders to open it and see its contents.


1. Select the file(s) or folder(s) that you wish to transfer. You can select items from only one device per transfer session.

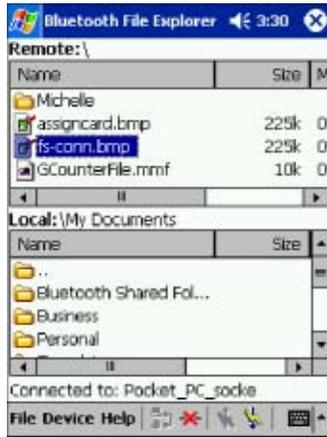

2. There are two different ways to initiate the transfer:

- Tap on the **File** menu. Select **Send to remote** or **Get from remote**, as applicable. The inappropriate option should be gray.
- Tap on the **Send to remote** icon or **Get from remote** icon, as applicable. The inappropriate icon should be gray.


3. A screen reports the status of the transfer.

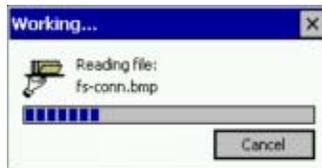

4. After the transfer, a copy of each selected item should appear in the other device.

### Create a Folder

1. Tap on the **File** menu. Select **Remote device** or **Local device**, wherever you want to create a folder, then tap **Create remote folder** or **Create local folder**, as applicable.

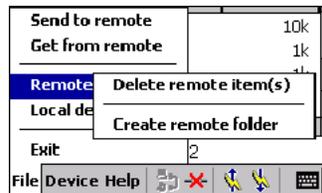

2. On the Dolphin 9500/9550, you can also tap and hold your stylus on an item in either the remote or local device that you wish to put in a new folder. In the pop-up menu, select **Create folder**.



3. In the next screen, enter a name for your new folder. Tap **OK**.




4. The new folder should be listed under the appropriate device.

### Delete File(s) or Folder(s)

1. Select item(s) that you wish to delete. You can only delete item(s) from one device at a time.
2. Tap on the **File** menu. Select **Remote device** or **Local device**, wherever the item(s) are located, then tap **Delete remote item(s)** or **Delete local item(s)**, as applicable.



3. Tap and hold your stylus on an item in either the remote or local device that you wish to put in a new folder. In the pop-up menu, select **Delete folder**.

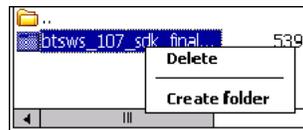

4. In the Confirm screen, tap **Yes**.



### Refresh Remote View

1. Tap on the **Device** menu. Select **Refresh** remote view.



2. Your local device begins to read the contents of the remote device.
3. After a few seconds, the contents view of the remote device is refreshed.

### Connect/Disconnect

To connect to the remote device, do the following:

1. Make sure the remote device has file sharing enabled.

---

2. Start the connection process by either of two methods:

- Tap on the Device menu. Select Connect.
- Tap on the Connect icon.

3. In the next screen, select the device you wish to connect to. Tap **Select**. Your mobile computer attempts to connect to the device selected.

To disconnect from the remote device, do the following:


1. Start the disconnection process by either of two methods:

- Tap on the **Device** menu. Select **Disconnect**.
- Tap on the **Connect** icon.

2. Your mobile computer disconnects from the remote device. Afterwards, no contents are listed for the remote device.


### Exit Bluetooth File Explorer

To exit the Bluetooth File Explorer, tap **File > Exit**.

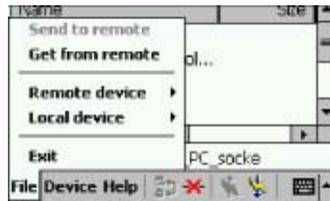

### Receive Contact or File

1. Tap on the **Bluetooth** icon. In the pop-up menu, tap **Transfer via Bluetooth > Receive Contact or File**.

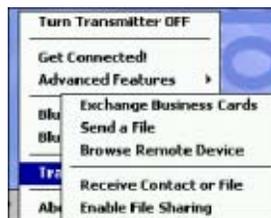

2. The Receive Contact or File status screen appears. Your mobile computer waits two minutes for the contact or file.



3. After successfully connecting to the remote device, the screen reports Connected then disappear. The new contact or file should now be on your device.

4. If two minutes passes before you receive the item, tap **Wait Again**.

5. After you receive the file or contact, the "Receive Contact or File" feature is automatically disabled.

### Enable File Sharing

1. Tap on the **Bluetooth** icon. In the pop-up menu, tap Transfer via **Bluetooth > Enable File Sharing**.

---

2. The Enable File Sharing status screen appears. Your mobile computer waits two minutes for the remote device to connect.



3. After successfully connecting to the remote device, the screen report Connected.

4. If two minutes passes before you connect, tap **Wait Again**.

5. File sharing is enabled until you end it by tapping **Cancel**.

---

## Using the Dialer

This section explains how to assign a dialing prefix and use the Dialer to dial a number directly from your Contacts list. The Dialer makes it quick and easy to perform dial-up networking.

Note: The Dialer has been verified to work with Nokia and Ericsson phones and is known not to work with the Motorola 270c, NTT Docomo Paldio 633S or Sony au C413S phone. Results may vary with other phones that are not listed as being supported by the Bluetooth system.

### Assign a Dialing Prefix

If you have not already assigned a dialing prefix during the install process, you can do so by following these steps:

1. Go to **Start > Settings > System** tab. Tap on **Dialer**.
2. Select the appropriate Dialing Prefix, then tap **OK**.



### Using the Dialer

1. To use the dialer, the mobile computer must already be connected to the Bluetooth phone. You can use the Get Connected! Wizard to do this. Also, the Bluetooth phone must be selected as your favorite.
2. Go to **Start > Contacts**.
3. Tap and hold your stylus on the contact you wish to dial to. In the pop-up menu, select **Dial Contact**. Alternatively, you can tap on **Tools** and select **Dial Contact**.




---

4. If you have multiple phone numbers for a contact, a screen appears listing them, including any dialing prefix you may have assigned. Select the phone number you wish to dial.



5. Your mobile computer connects to your phone and begins dialing.

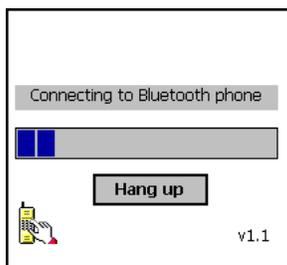

The Dialer can dial a phone number containing any of the following non-numeric characters:

\* # + . / ! @ - \ space A B C D T P W

The following string can also be included in a phone number: (',')

The Dialer cannot dial a phone number containing non-numeric characters other than those listed above. HHP recommends that you follow the standard Microsoft Outlook format for phone numbers.

---

## Get Connected Wizard


The Get Connected! Wizard guides you through a one-time setup process that prepares the mobile computer and phone for Bluetooth connections. The wizard varies depending on what phone you want to connect to.

### Ericsson, Nokia 6210, NTT DoCoMo, Sony Phones

1. Tap on the **Bluetooth** task tray icon. In the pop-up menu, select **Get Connected!**
2. Follow the Bluetooth “Get Connected!” Wizard. In the second screen, use the drop-down list to select your Bluetooth phone. The wizard provides tailored instructions based on your selection.



3. Follow the next screen(s) to prepare your specific phone for Bluetooth connections. You may need to do 1, 2 or all of the following steps:
  - (a) Naming your Bluetooth phone
  - (b) Setting your Bluetooth phone in Discoverable mode
  - (c) Preparing your Bluetooth passkey.

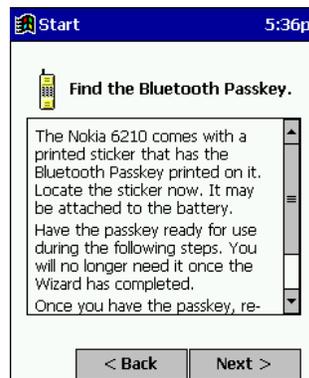

- 
- When the search is complete, a list of the discovered Bluetooth phones appears. Choose the phone you wish to connect to, and tap **Select**. A service discovery phase begins, about 5-10 seconds.



- As prompted in the next screen, prepare your phone for bonding. For instructions on setting your phone to “Bondable” or “Pairable” mode, refer to your phone manual. Have your passkey ready, then tap **Next>**.
- In the next screen, enter the passkey. Tap **Reply**.



- The mobile phone may then either automatically accept the passkey or ask you to enter one. If prompted for a passkey, use the same one you entered on the mobile computer.

*Ericsson T68/T68i only: When the phone asks you if you want to bond, select 2: Add to paired devices. Do not tap ACCEPT.*

- Tap **Finish**. After successfully connecting, the phone appears in the Bluetooth Devices folder. On the Today screen, the Bluetooth icon blinks. You do not need to run the Get Connected! Wizard again unless you plan to switch between different phones.

*Note:* You may also switch between different phones by assigning a new “favorite phone” in the Bluetooth Devices folder.

#### **Motorola Timeport 270C, Nokia 3650/6310/7650/8910/8910i**

- Tap on the **Bluetooth** task tray icon. In the pop-up menu, select **Get Connected!**
- Follow the Bluetooth “Get Connected!” Wizard. In the second screen, use the drop-down list to select your Bluetooth phone. The wizard provides tailored instructions for your phone.

*Note:* The screens below are for the Nokia 7650.

- As directed on the next two screens, assign the phone a unique name, set the phone to Discoverable mode, and tap **Next**.

---


4. The mobile computer searches for the phone. When the search is over, a list of the discovered Bluetooth phones appears.




5. Choose the phone you want to connect to, and tap **Select**. A service discovery phase begins, about 5-10 seconds.

6. The next two screens describe procedures you complete outside of the wizard. Read through each screen but do not complete the described procedures until you exit the wizard.

**Bonding with your phone** - This must be completed to establish the Bluetooth connection and involves dial-up networking.

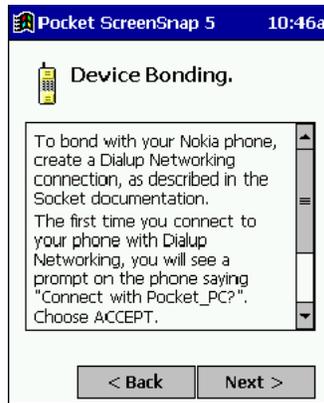

**Automatic Connections** - This procedure is optional but makes future Bluetooth connections more convenient.

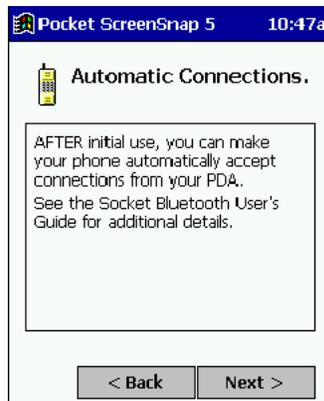

7. Continue to the last screen of the wizard and tap **Finish**. Now proceed to STEP 6 to complete the bonding process and, if desired, set up automatic connections.



*Note:* Directions for these procedures are provided in Dial-up to Your Network, starting on the next page.

---

## Dial-up to Your Network

Complete the following steps to create a new Bluetooth internet connection. Before setting up dial-up networking, prepare yourself with dial-up information and other necessary settings from your office network or ISP.

1. Go to **Start > Settings > Connections** tab > **Connections**. In the top field, select **Internet Settings** and tap **Modify**. Then, tap **New**.

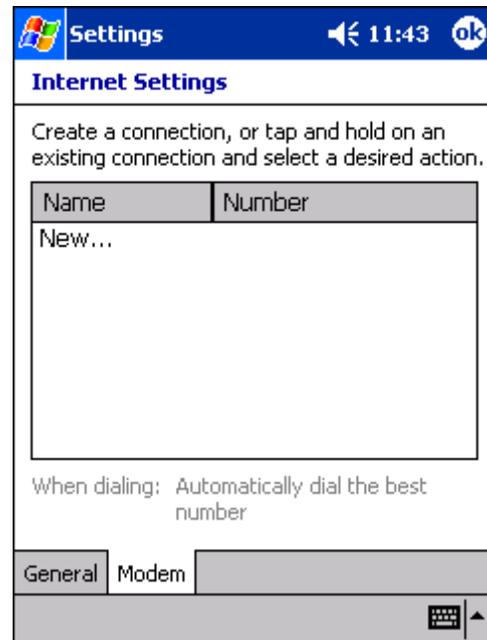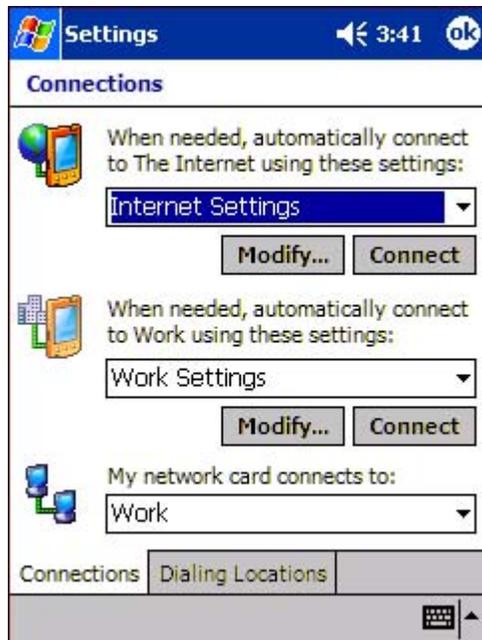


2. On the Make a New Connection screen, enter a name for the dial-up connection. For the modem, select **Bluetooth Phone**. For the Baud Rate, select **115200**. Tap **Advanced**.



*Note:* Remember what you name the connection. In the future, you will need to select it to start the connection.

3. Tap **Next**.
4. In the Phone number field, enter the dial-up number. Tap **Next**.

5. Uncheck **Wait for dial tone before dialing**. Tap **Finish**.

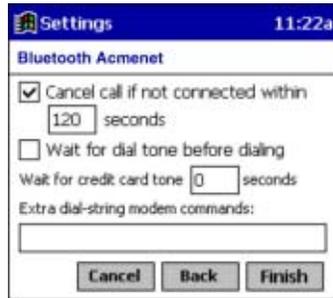

6. Now you are ready to start the connection. In the Connections screen, under Internet Settings, tap **Connect**. In Network Log On, verify the dialing settings. Tap **OK**.



If you want to configure Port Settings, TCP/IP, or Name Server settings, navigate to the setting and tap **Advanced**; see [Advanced Settings](#) on page 5-19.

**7. ONLY FOR MOTOROLA TIMEPORT 270C OR NOKIA 3650/6310/7650/8910/8910i:**

- a) After you tap Connect for the first time, the phone displays a message asking if you want to bond. On Motorola, enter **GRANT**; on Nokia, enter **ACCEPT**.
- b) Make up a 4-16 digit passkey, enter it on the phone, then enter it on the Dolphin 9500/9550.



*Note:* The Bluetooth icon on the Today screen blinks to indicate a connection.

- c) After successfully bonding, you can set up the phone to automatically connect to your Dolphin 9500/9550 without requiring a passkey.

---

#### Automatic Connections for Motorola Timeport 270C:

- On the phone, press MENU.
- Scroll to Settings, then press SELECT.
- Scroll to Connection, then press ON.
- On Bluetooth Link, press SELECT.
- Scroll to Devices, then press SELECT.
- Choose your mobile computer, then press EDIT.
- Scroll to Access:Ask, then press CHANGE.
- Scroll to Automatic, then press SELECT. Press DONE.


#### Automatic Connections for Nokia 3650/7650:

- On the phone, press MENU.
- Scroll to Connectivity, then press OPTIONS.
- The Open option should be highlighted. Press SELECT.
- The Bluetooth option should be highlighted. Press OPTIONS.
- The Open option should be highlighted. Press SELECT.
- Scroll to the right tab to access the Paired devices list. Highlight your mobile computer, then press OPTIONS.
- Scroll to Set as authorized, then press SELECT.
- In the confirmation screen, press YES.

#### Automatic Connections for Nokia 6310/8910/8910i:

- On the phone, press MENU.
- Scroll to 10 Bluetooth, then press SELECT.
- Scroll to 4 View Paired Devices, then press SELECT.
- Highlight the Dolphin 9500/9550, then press OPTIONS.
- Scroll to 3 Request Connection Authorization, then press NO.

To use a different Bluetooth phone for dial-up networking, you can use the same connection setup, but you must make the new phone your favorite. Just run the Get Connected! Wizard again, select the new phone, and make it your new Favorite when prompted.

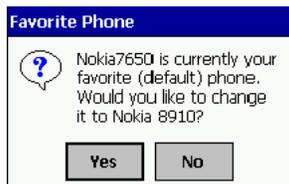

Alternatively, you can use the Bluetooth Devices folder to change your favorite phone. Refer to [Using the Dolphin 9500/9550 Mobile Computer](#) beginning on page 4-1 for instructions.




## Applications

This chapter describes the applications that ship already installed on your Dolphin 9500/9550 terminals.

### *Calendar: Scheduling Appointments and Meetings*

Use Calendar to schedule appointments, including meetings and other events. You can check your appointments in one of several views (Agenda, Day, Week, Month, and Year) and easily switch views by using the **View** menu.

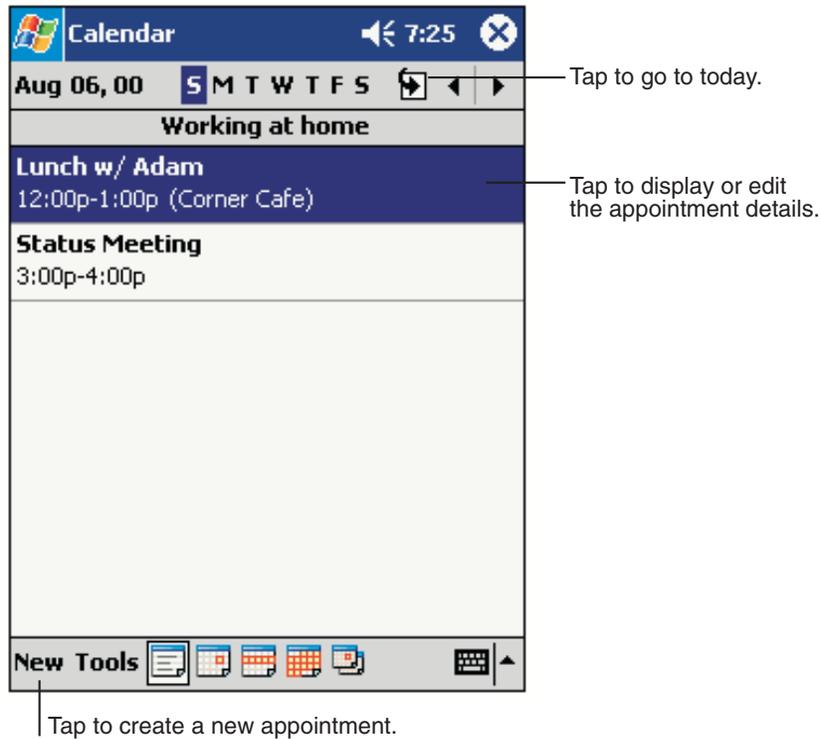


### Calendar Application

*Note:* You can customize the Calendar display, such as changing the first day of the week, by tapping **Options** on the **Tools** menu.

#### *To Create an Appointment*

1. If you are in Day or Week view, tap the desired date and time for the appointment.
2. Tap **New**.

3. Using the input panel, enter a description and a location. Tap first to select the field.

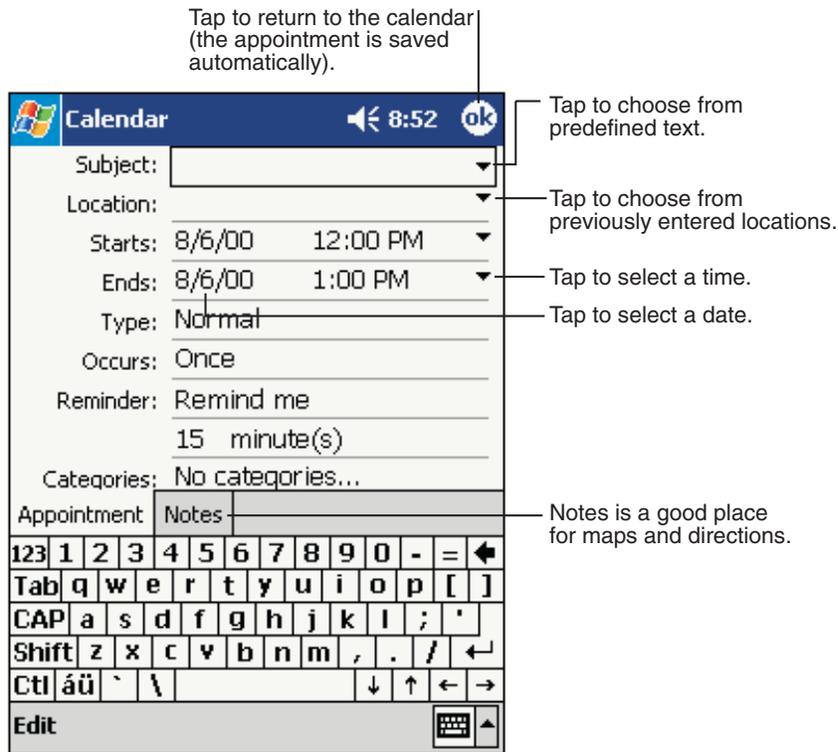

### Entering an Appointment


4. If needed, tap the date and time to change them.
5. Enter other desired information. To see all available fields, hide the input panel.
6. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, refer to [Notes](#) on page 9-10.
7. When finished, tap **OK** to return to the calendar.

*Note:* If you select **Remind me** in an appointment, you will be reminded according to the options set in **Start > Settings > Personal tab > Sounds & Reminders**.

---

## Using the Summary Screen

When you tap an appointment in Calendar, a summary screen is displayed. To change the appointment, tap **Edit**.

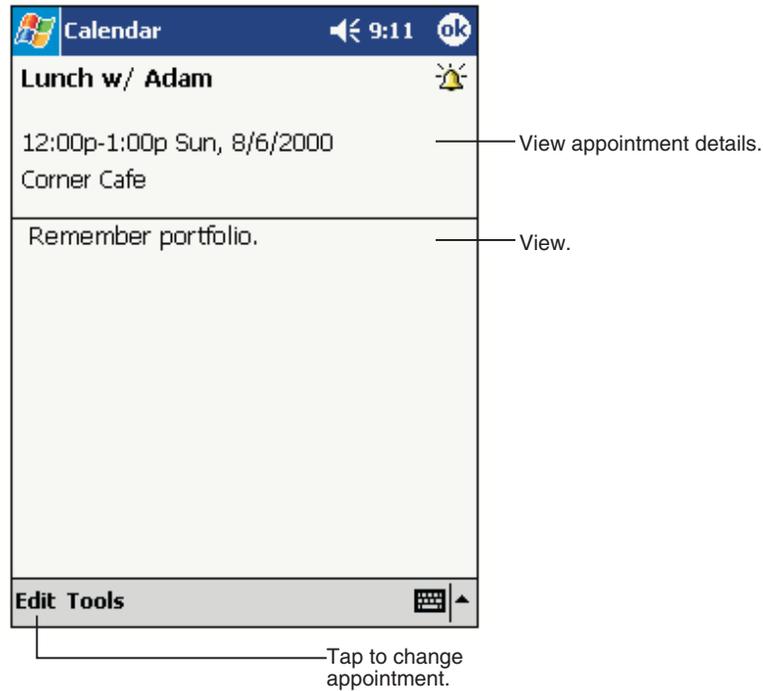

**Appointment Summary Screen**

## Creating Meeting Requests

You can use Calendar to set up meetings with users of Outlook or Pocket Outlook. The meeting request is created automatically and sent either when you synchronize Inbox or when you connect to your e-mail server. Indicate how you want meeting requests sent by tapping **Tools** and then **Options**. If you send and receive e-mail messages through ActiveSync, select **ActiveSync**.

### To Schedule a Meeting


1. Create an appointment.
2. In the appointment details, hide the input panel, and then tap **Attendees**.
3. From the list of e-mail addresses you've entered in Contacts, select the meeting attendees. The meeting notice is created automatically and placed in the Outbox folder.

For more information on sending and receiving meeting requests, see Calendar Help and Inbox Help.

---

## Contacts

Contacts maintains a list of your friends and colleagues so that you can easily find the information you're looking for, whether you're at home or on the road.

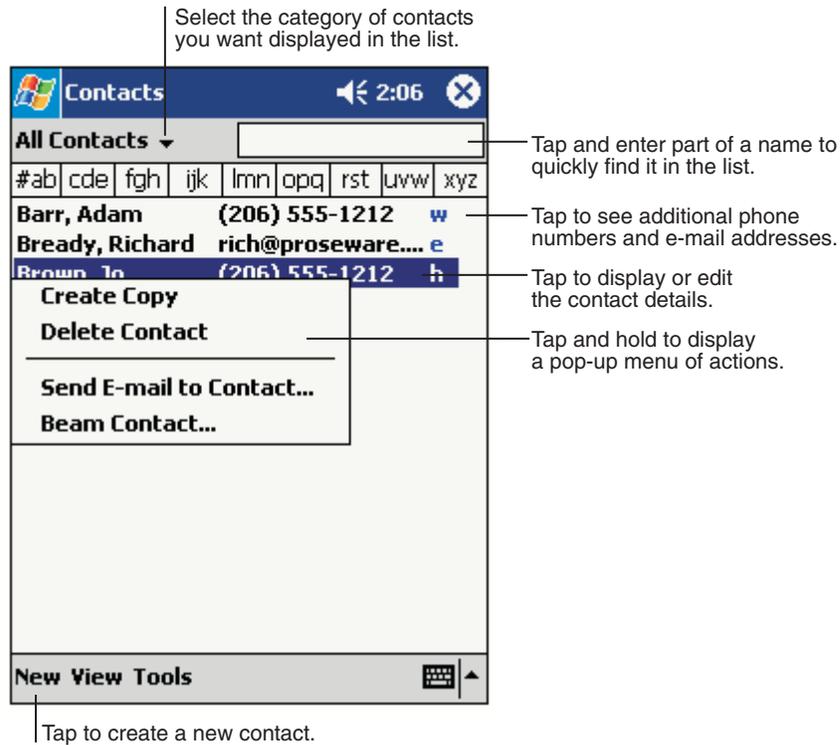


### Contact Application

*Note:* To change the way information is displayed in the list, tap **Tools > Options**.

---

## To Create a Contact

1. Tap **New**.

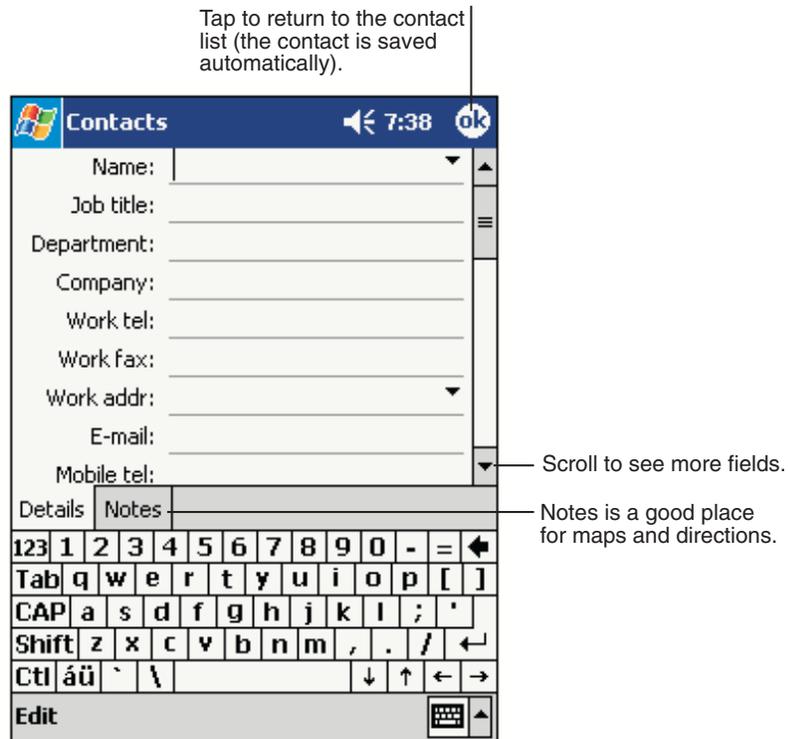

### Creating a Contact

2. Using the input panel, enter a name and other contact information. You need to scroll down to see all available fields.
3. To assign the contact to a category, scroll to and tap **Categories** and select a category from the list. In the contact list, you can display contacts by category.
4. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, refer to [Notes](#) on page 9-10.
5. When finished, tap **OK** to return to the contact list.


There are four ways to find a contact:

- In the contact list, enter a contact name in the box under the navigation bar. To show all contacts again, clear text from the box or tap the button to the right of the box.
- In the contact list, tap the category list (labeled **All Contacts** by default) and select the type of contact that you want displayed. To show all contacts again, select **All Contacts**. To view a contact not assigned to a category, select **None**.
- To view the names of companies your contacts work for, in the contact list, tap **View > By Company**. The number of contacts that work for that company are displayed to the right of the company name.
- Tap , **Find**, enter the contact name, select **Contacts** for the type, and then tap **Go**.

---

## Using the Summary Screen

When you tap a contact in the contact list, a summary screen is displayed. To change the contact information, tap **Edit**.

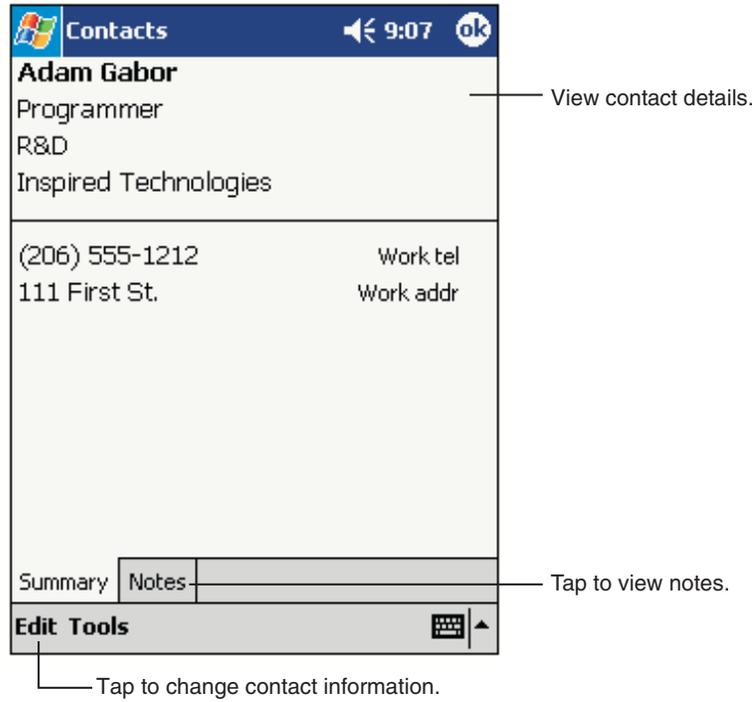


**Contacts Summary Screen**

---

## Tasks

Use Tasks to keep track of what you have to do.

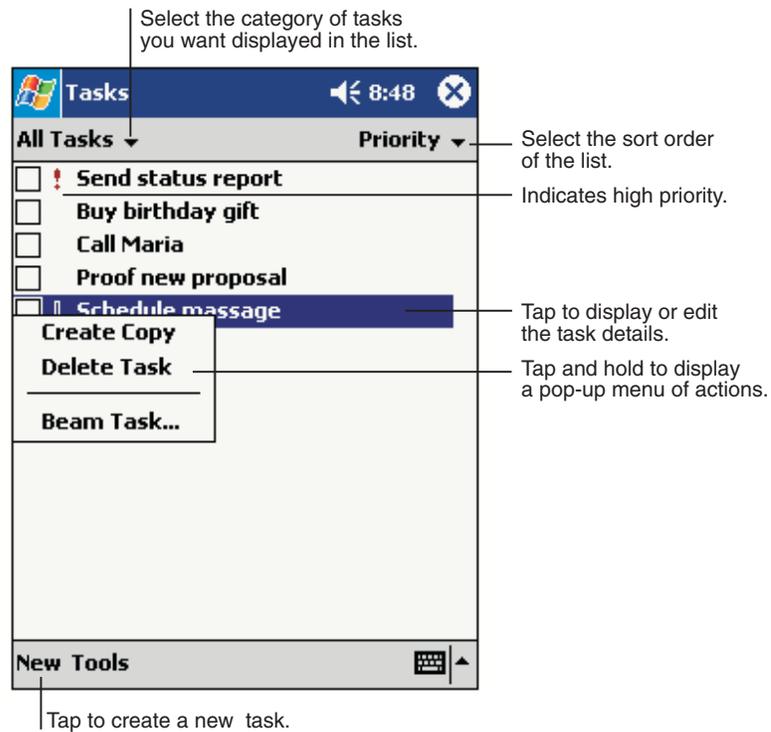


### Task Application

*Note:* To change the way information is displayed in the list, tap **Tools > Options**.

---

## To Create a Task

1. Tap **New**.

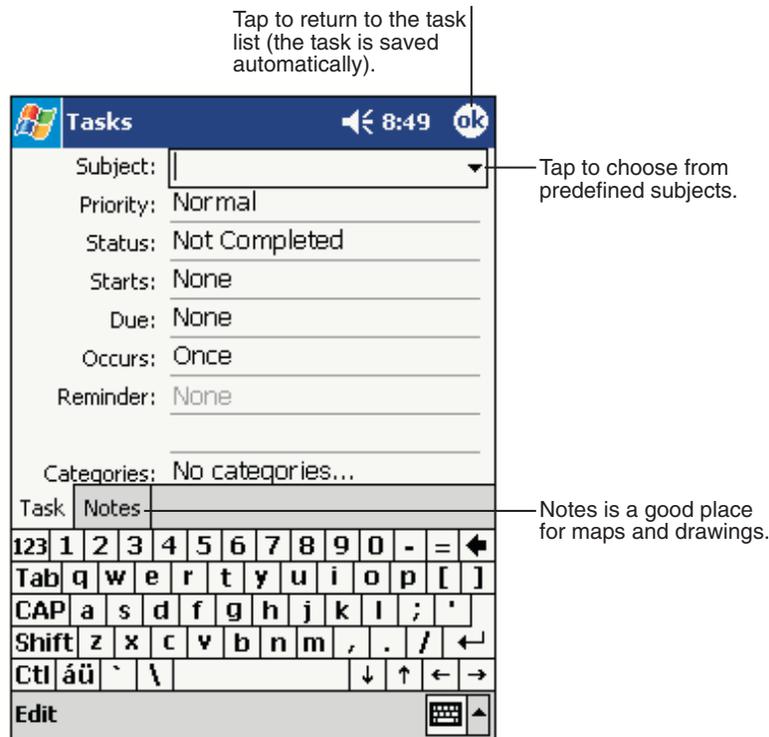

### Creating a Task


2. Using the input panel, enter a description.
3. You can enter a start date and due date or enter other information by first tapping the field. If the input panel is open, you need to hide it to see all available fields.
4. To assign the task to a category, tap **Categories** and select a category from the list. In the task list, you can display tasks by category.
5. To add notes, tap the **Notes** tab. You can enter text, draw, or create a recording. For more information on creating notes, refer to [Notes](#) on page 9-10.
6. When finished, tap **OK** to return to the task list.

*Note:* To quickly create a task with only a subject, tap **Entry Bar** on the **Tools** menu. Then, tap Tap here to add a new task and enter your task information.

---

## Using the Summary Screen

When you tap a task in the task list, a summary screen is displayed. To change the task, tap **Edit**.

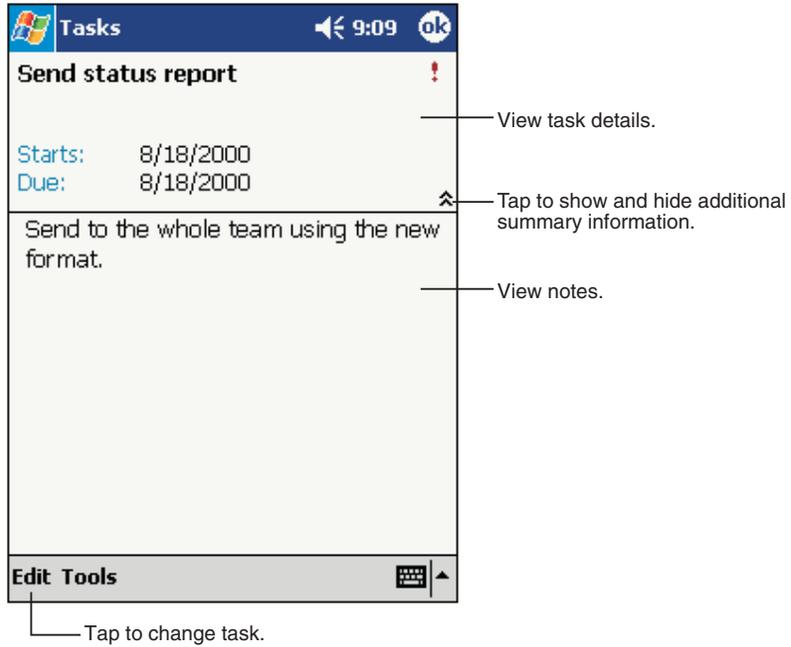


### Task Summary Screen

---

## Notes

Quickly capture thoughts, reminders, ideas, drawings, and phone numbers with Notes. You can create a written note or a recording. You can also include a recording in a note. If a note is open when you create the recording, it will be included in the note as an icon. If the note list is displayed, it will be created as a stand-alone recording.

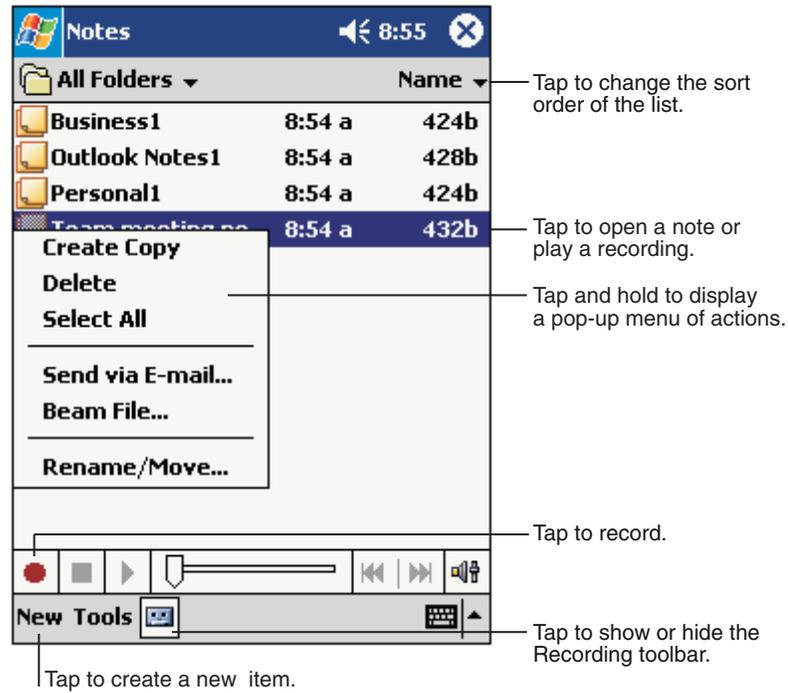

## Notes Application

---

## To Create a Note

1. Tap **New**.
2. Create your note by writing, drawing, typing, and recording. For more information about using the input panel, writing and drawing on the screen, and creating recordings, see [Using the Dolphin 9500/9550 Mobile Computer](#) on page 4-1.



## Creating a Note

---

## *Inbox*

Use Inbox to send and receive e-mail messages in either of these ways:

- Synchronize e-mail messages with Microsoft Exchange or Microsoft Outlook on your desktop computer.
- Send and receive e-mail messages by connecting directly to an e-mail server through an Internet service provider (ISP) or a network.

### *Synchronizing E-mail Messages*

E-mail messages can be synchronized as part of the general synchronization process. You need to enable Inbox synchronization in ActiveSync. For information on enabling Inbox synchronization, see ActiveSync Help on the desktop computer.

During synchronization:

- Messages are copied from the mail folders of Exchange or Outlook on your desktop computer to the ActiveSync folder in Inbox on the terminal. By default, you will receive messages from the past three days only, the first 100 lines of each message, and file attachments of less than 100 KB in size.
- E-mail messages in subfolders must be selected in ActiveSync on your desktop computer to be transferred.
- E-mail messages in the Outbox folder on the terminal are transferred to Exchange or Outlook, and then sent from those programs.

*Note:* You can also synchronize e-mail messages with your desktop computer from a remote location. For more information, see Chapter 7.

### *Connecting Directly to an E-mail Server*

In addition to synchronizing e-mail messages with your desktop computer, you can send and receive e-mail messages by connecting to an e-mail server. When you connect the terminal to the e-mail server, new messages are downloaded to the Inbox folder, messages in the Outbox folder are sent, and messages that have been deleted on the e-mail server are removed from the Inbox folder.


Messages received directly from an e-mail server are linked to your e-mail server rather than your desktop computer. When you delete a message on the terminal, it is also deleted from the e-mail server the next time you connect the terminal to the e-mail server according to the settings selected in ActiveSync.

You can work online or offline. When working online, you read and respond to messages while connected to the e-mail server. Messages are sent as soon as you tap **Send**, which saves space on the terminal. When working offline, after you've downloaded new message headers or partial messages, you can disconnect from the e-mail server and then decide which messages to download completely. The next time you connect, Inbox downloads the complete messages you've marked for retrieval and sends the messages you've composed.

---

## Using the Message List


Messages you receive are displayed in the message list. By default, the most recently received messages are displayed first in the list.

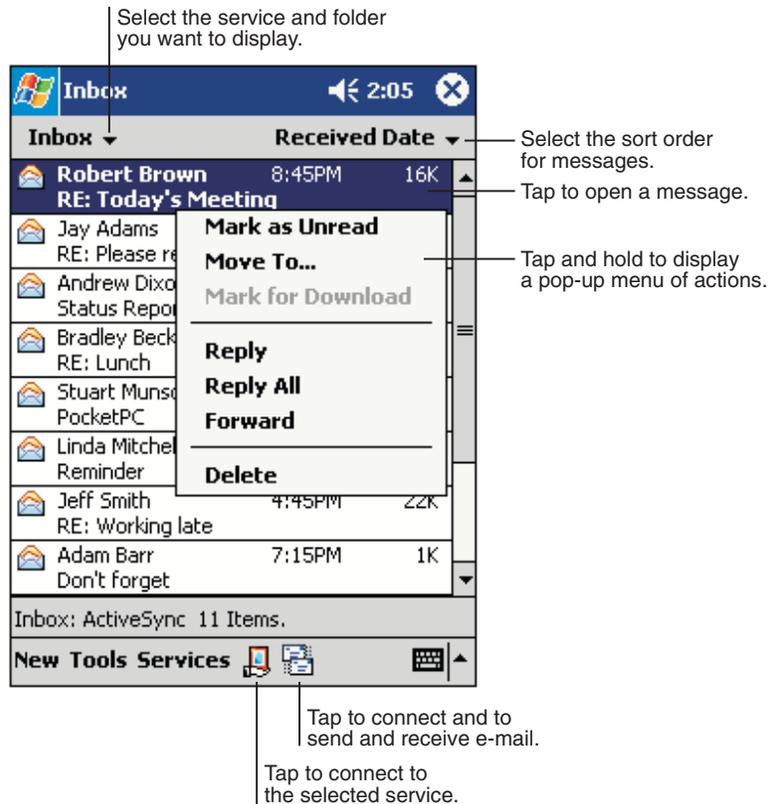

## InBox Application

---

When you receive a message, tap it to open it. Unread messages are displayed in bold.

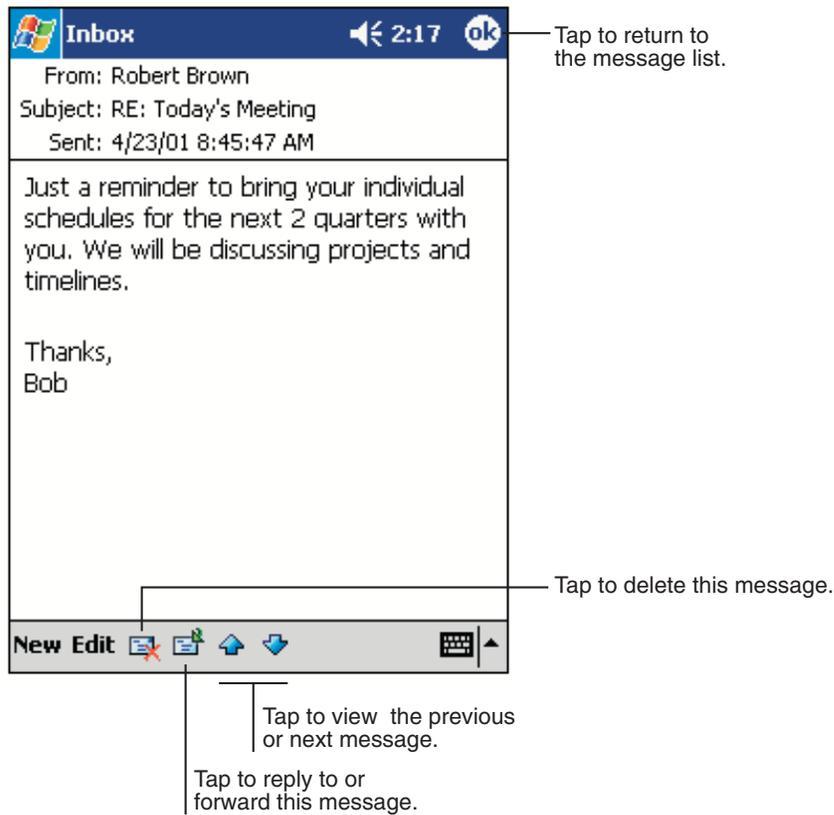

## Viewing A Message

When you connect to your e-mail server or synchronize with your desktop computer, by default, you'll receive messages from the last five days only, the first 100 lines of each new message, and file attachments of less than 100 KB in size. The original messages remain on the e-mail server or your desktop computer.

You can mark the messages that you want to retrieve in full during your next synchronization or e-mail server connection. In the message list, tap and hold the message you want to retrieve. On the pop-up menu, tap **Mark for Download**. The icons in the Inbox message list give you visual indications of message status.


You specify your downloading preferences when you set up the service or select your synchronization options. You can change them at any time:

- Change options for Inbox synchronization using ActiveSync options. For more information, see ActiveSync Help.
- Change options for direct e-mail server connections in Inbox on the terminal. Tap **Tools** and then tap **Options**. On the **Service** tab, tap the service you want to change. Tap and hold the service and select **Delete** to remove a service.

---

## Composing Messages

1. Tap **New**.
2. In the **To** field, enter an e-mail or SMS address of one or more recipients, separating them with a semicolon, or select a name from the contact list by tapping the **Address Book** button.  
All e-mail addresses entered in the e-mail fields in Contacts appear in the Address Book.

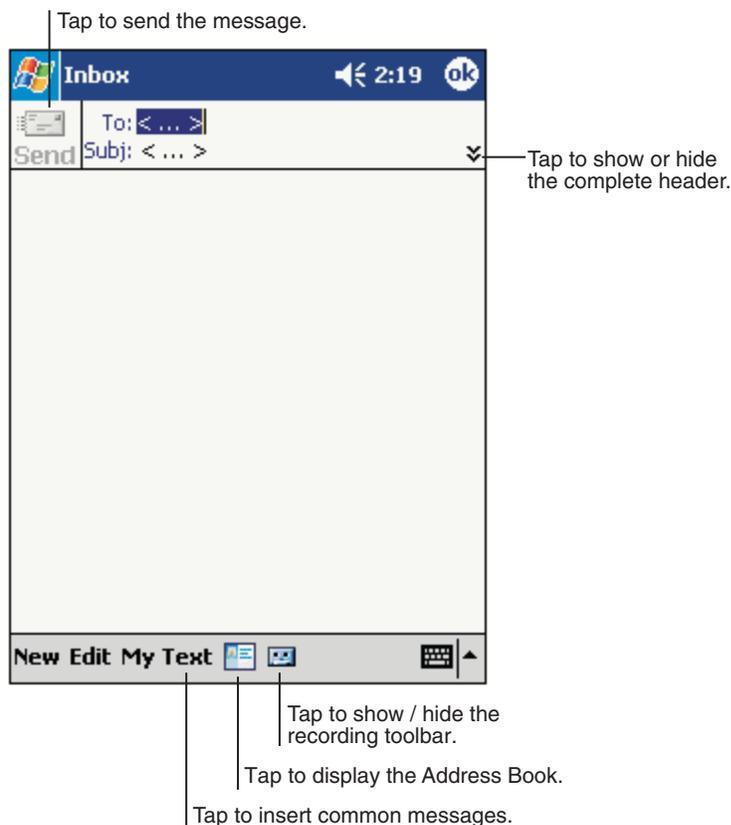

### Creating a Message

- Compose your message. To enter preset or frequently used messages, tap **My Text** and select a message.
- Tap **Send** when you've finished the message. If you are working offline, the message is moved to the Outbox folder and will be sent the next time you connect.

If you are sending an SMS message and want to know if it was received, tap **Edit, Options**, and select **Request SMS text message delivery notification** before sending the message.

### Managing E-mail Messages and Folders

Messages are displayed in one of five folders for each service you have created: Inbox, Deleted Items, Drafts, Outbox, and Sent Items.

The Deleted Items folder contains messages that have been deleted on the device. The behavior of the Deleted and Sent Items folders depends on the selected options. To select these options, tap **Tools > Options > Message** tab.

To move a message to another folder, in the message list, tap and hold the message, tap **Move to** on the pop-up menu, and select the desired folder.

To create additional folders, tap **Tools > Manage Folders**.

---

## ***Folder Behavior with a Direct Connection to an E-mail Server***

The behavior of the folders you create depends on whether you are using ActiveSync, SMS, POP3, or IMAP4.

- If you use ActiveSync, e-mail messages in the Inbox folder in Outlook on your desktop computer are automatically synchronized with the terminal. You can select to synchronize additional folders by designating them for ActiveSync. The folders you create and the messages you move will then be mirrored on the server. For example, if you move two messages from the Inbox folder to a folder named Family, and you have designated Family for synchronization, the server creates a copy of the Family folder and copies the messages into that folder. You can then read the messages while away from your desktop computer.
- If you use SMS, messages are stored in the Inbox folder.
- If you use POP3 and you move e-mail messages to a folder you created, the link is broken between the messages on the terminal and their copies on the mail server. The next time you connect, the mail server will see that the messages are missing from the terminal Inbox and delete them from the server. This prevents you from having duplicate copies of a message, but it also means that you will no longer have access to messages that you move to folders created from anywhere except the terminal.
- If you use IMAP4, the folders you create and the e-mail messages you move are mirrored on the server. Therefore, messages are available to you anytime you connect to your mail server, whether it is from the terminal or desktop computer. This synchronization of folders occurs whenever you connect to your mail server, create new folders, or rename/delete folders when connected.

---

## *Pocket Internet Explorer*

Use Microsoft Pocket Internet Explorer to view Web or WAP pages in either of these ways:

- During synchronization with your desktop computer, download your favorite links and mobile favorites that are stored in the Mobile Favorites subfolder in Internet Explorer on the desktop computer.
- Connect to an Internet service provider (ISP) or network and browse the Web.

When connected to an ISP or network, you can also download files and programs from the Internet or intranet.

## *Accessing Pocket Internet Explorer*

To switch to Pocket Internet Explorer, tap **Start** and then Internet Explorer.



You can use Pocket Internet Explorer to browse Mobile Favorites and channels that have been downloaded without connecting to the Internet. You can also connect to the Internet through an ISP or a network connection and browse the Web.

## *Browse the Internet on Your Terminal*

You must set up a connection to your ISP or corporate network using Connections before browsing; see [Using an ISP](#) on page 6-9. If you select Pocket Internet Explorer before setting up the network connections, a screen may appear allowing you to proceed to the connection settings screen.

After you select the settings, return to Pocket Internet Explorer.

1. Open Internet Explorer (**Start > Internet Explorer**).
2. To connect and start browsing, tap **View** and then **Address Bar**.
3. In the address bar that appears at the top of the screen, enter the Web address you want to visit and then tap **Go**.
4. Tap the arrow to choose from previously entered addresses.

If Mobile Favorites have been set up, you can tap one of them to start browsing. See [The Mobile Favorites Folder](#) on page 9-18.

To add a favorite link while browsing, go to the page you want to add, tap and hold on the page, and tap **Add to Favorites** on the pop-up menu.

---

## *The Mobile Favorites Folder*

### **Purpose**

The Mobile Favorites folder was created on your desktop computer when you installed ActiveSync. It enables you to create Favorite Links on your desktop computer that you can transfer to your Dolphin 9500/9550 terminal. Those Favorite Links are then available for selection when browsing the internet on your terminal.

### **Process**

First, you create your Favorite Links in the Mobile Favorites folder on your desktop computer. Then, the next time you sync your desktop computer with your terminal, those Mobile Favorites are transferred to the Mobile Favorites folder on to your terminal.

Only items stored in the Mobile Favorites subfolder in the Favorites folder in Internet Explorer on your desktop computer are synchronized with the Mobile Favorites folder on your terminal.


*Note:* Unless you mark a Favorite Link as a mobile favorite, only the link downloads to your terminal, and you will need to connect to your ISP or network to view the content. For more information on synchronization, see ActiveSync Help on the desktop computer.

## *Creating and Synchronizing Mobile Favorites*

If you are using Microsoft Internet Explorer 5.0 or later on your desktop computer, you can download Mobile Favorites to the terminal. Synchronizing mobile favorites downloads Web content to your device so that you can view pages while you are disconnected from your ISP and desktop computer.

Use the Internet Explorer plug-in installed with ActiveSync to create mobile favorites

1. On your desktop computer, open Internet Explorer, click **Tools > Create Mobile Favorite**.

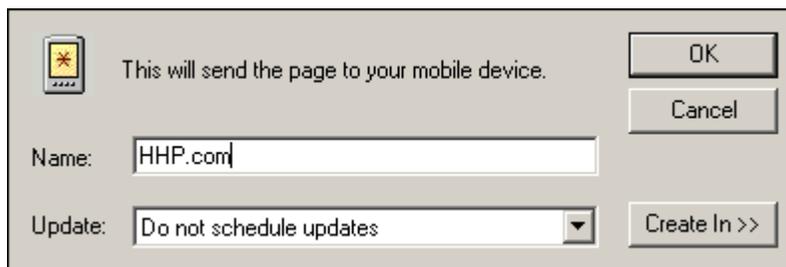

2. To change the link name, enter a new name in the **Name** box.
3. Optionally, in **Update**, select a desired update schedule.
4. Tap **OK**. Internet Explorer downloads the latest version of the page to your desktop computer.
5. If you want to download the pages that are linked to this mobile favorite, in Internet Explorer on the desktop computer, right-click the mobile favorite and then click **Properties**. On the **Download** tab, specify the number of links down that you want to download. To conserve memory, go only one level down.
6. Synchronize the terminal and desktop computer. Mobile favorites that are stored in the Mobile Favorites folder in Internet Explorer are downloaded to the terminal.


If you did not specify an update schedule in Step 3, you will need to manually download content to keep the information updated on your desktop computer and terminal. Before synchronizing, in Internet Explorer on your desktop computer, click **Tools** and then **Synchronize**. You will see the last time content was downloaded to the desktop computer, and you can manually download content if needed.

You can add a button to the Internet Explorer toolbar for creating mobile favorites. In Internet Explorer on your desktop computer, click **View, Toolbars**, and then **Customize**.

## *View Mobile Favorites and Channels on the Terminal*

1. Access Pocket Internet Explorer.

2. Tap the Favorites button to display your list of favorites .

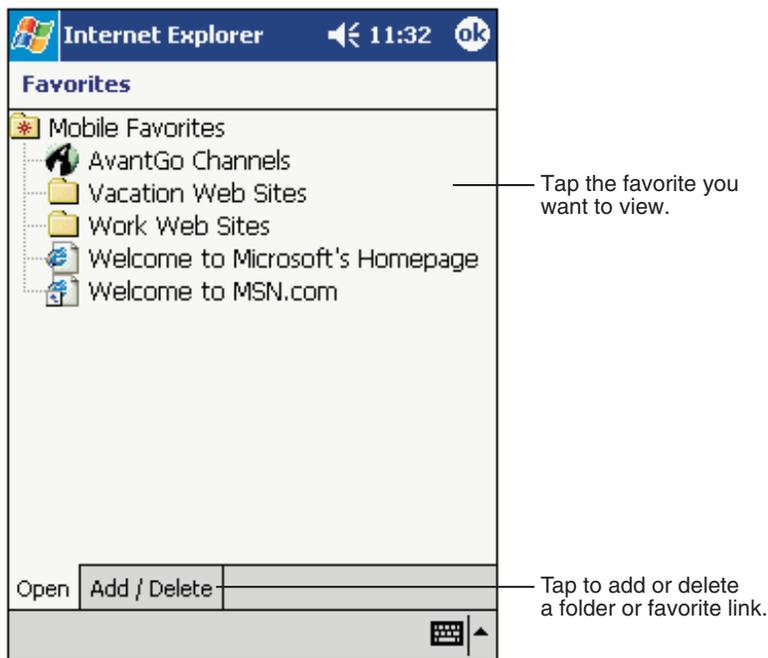

3. Tap the page you want to view.

You'll see the page that was downloaded the last time you synchronized with your desktop computer. If the page is not on the terminal, the favorite will be dimmed. You will need to synchronize with your desktop computer again to download the page to the terminal, or connect to the Internet to view the page.

### **Saving Memory On Your Terminal**

Mobile favorites take up storage memory on the terminal.

To minimize the amount of memory used:

- In the settings for the Favorites information type in ActiveSync options, turn off pictures and sounds, or stop specific mobile favorites from being downloaded to the terminal. For more information, see **ActiveSync Help**.
- Limit the number of downloaded linked pages. In Internet Explorer on the desktop computer, right-click the mobile favorite you want to change and then Properties. On the Download tab, specify 0 or 1 for the number of linked pages you want to download.

### **Using AvantGo® Channels**

AvantGo is a free interactive service that gives you access to personalized content and thousands of popular Web sites. You subscribe to AvantGo channels directly from the terminal. Then, you synchronize, or connect to the Internet to download the content. For more information, visit the AvantGo website: <http://avantgo.com/frontdoor/index.html>.

### **To Sign Up for AvantGo**

1. In ActiveSync options on the desktop computer, turn on synchronization for the AvantGo information type.
2. In Pocket Internet Explorer, tap the **Favorites** button to display your list of favorites .
3. Tap the **AvantGo Channels** link.
4. Tap **Activate**.

---

5. Follow the directions on the screen. Synchronize the terminal with your desktop computer and then tap the **My Channels** button to complete the AvantGo setup.

When synchronization is complete, tap the AvantGo Channels link in your list of favorites to see a few of the most popular channels. To add or remove channels, tap the Add or Remove link.

---

## Companion Programs

The companion programs for Pocket PC installed on Dolphin 9500/9550 terminals are

- Pocket Word and
- Pocket Excel.

Windows® Media Player™ for Pocket PC, Microsoft® Money, MSN® Messenger, Microsoft® Reader are NOT installed on the Dolphin 9500/9550 when shipped but may be installed from the Microsoft Companion CD.

## Pocket Word

Pocket Word works with Microsoft Word on your desktop computer to give you easy access to copies of your documents. You can create new documents on the terminal, or you can copy and paste documents from your desktop computer. Synchronize documents between your desktop computer and your device so that you have the most up-to-date content in both locations.


To create a new file, tap **Start > Programs > Pocket Word > New**. A blank document appears.

If you've selected a template for new documents in the Options dialog box, that template appears with appropriate text and formatting already provided.

You can open only one document at a time; when you open a second document, you'll be asked to save the first. You can save a document you create or edit in a variety of formats, including Word (.doc), Pocket Word (.psw), Rich Text Format (.rtf), and Plain Text (.txt).

## Using Pocket Word

Pocket Word contains a list of the files stored on the terminal. Tap a file in the list to open it. To delete, make copies of, and send files, tap and hold a file in the list. Then, select the appropriate action on the pop-up menu.

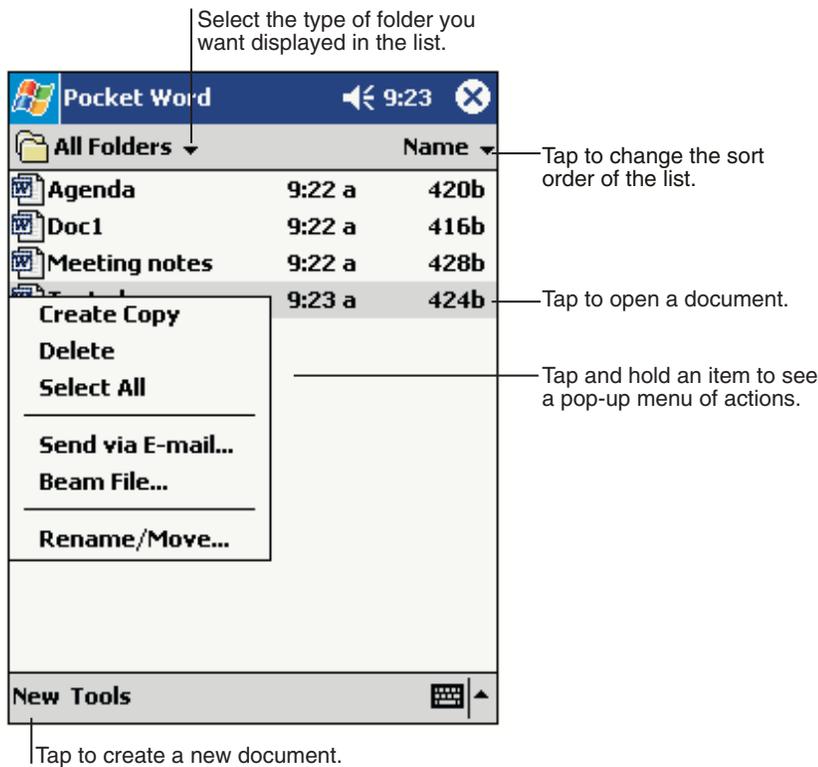

You can enter information in Pocket Word in one of four modes (typing, writing, and drawing), which are displayed on the **View** menu.


You can change the zoom magnification by tapping **View > Zoom**, and then selecting the percentage you want. Select a higher percentage to enter text and a lower one to see more of your document.

If you're opening a Word document created on a desktop computer, select **Wrap to Window** on the **View** menu so that you can see the entire document.

## Typing Mode

Using the input panel or Dolphin keypad, enter typed text into the document. For more information on entering typed text, see [Using the Keyboards](#) on page 4-9.

To format existing text and to edit text, first select the text. You can select text as you do in a Word document, using your stylus instead of the mouse to drag through the text you want to select. You can search a document to find text by tapping **Edit** and then **Find/Replace**.

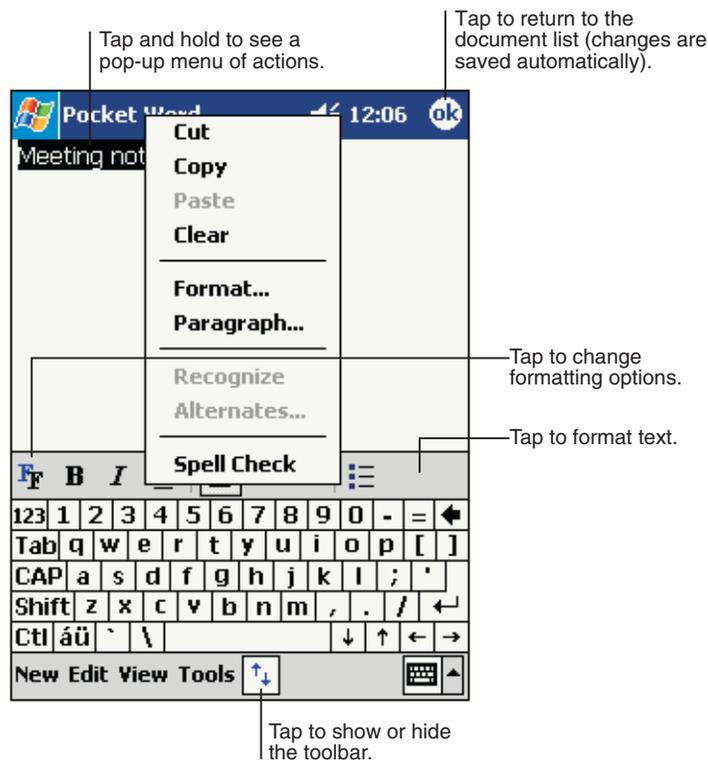


---

## Writing Mode

In writing mode, use your stylus to write directly on the screen. Ruled lines are displayed as a guide, and the zoom magnification is greater than in typing mode to allow you to write more easily.

For more information on writing and selecting writing, see [Using the Dolphin 9500/9550 Mobile Computer](#) on page 4-1.

### Writing on the Screen in Pocket Word

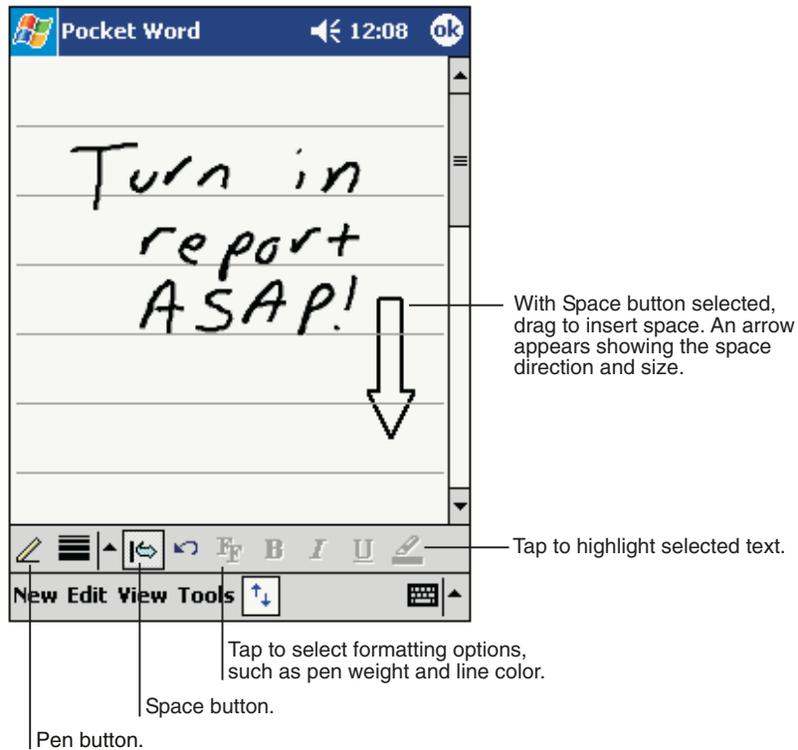


If you cross three ruled lines in a single stylus stroke, the writing becomes a drawing, and can be edited and manipulated as described in the following section.

Written words are converted to graphics (metafiles) when a Pocket Word document is converted to a Word document on your desktop computer.

---

## Drawing Mode

In drawing mode, use your stylus to draw on the screen. Gridlines appear as a guide. When you lift your stylus off the screen after the first stroke, you'll see a drawing box indicating the boundaries of the drawing. Every subsequent stroke within or touching the drawing box becomes part of the drawing.

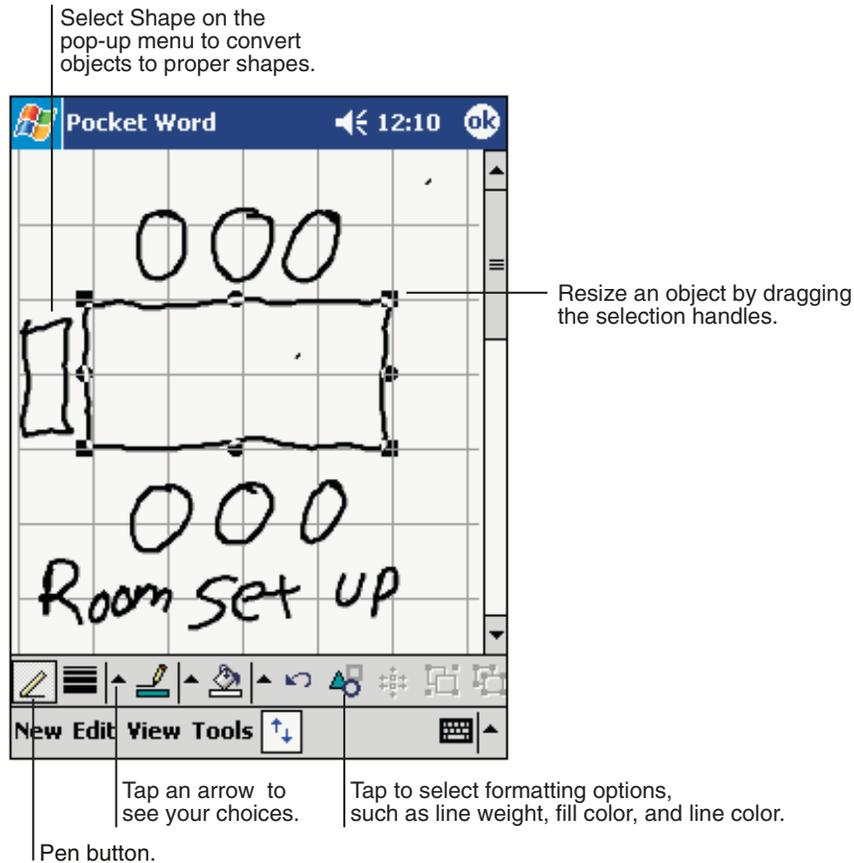

For more information on drawing and selecting drawings, see [Using the Dolphin 9500/9550 Mobile Computer](#) on page 4-1.

For more information on using Pocket Word, tap **Start** and then **Help**.

---

## Pocket Excel

Pocket Excel works with Microsoft Excel on your desktop computer to give you easy access to copies of your workbooks. You can create new workbooks on the terminal, or you can copy and paste workbooks from your desktop computer. Synchronize workbooks between your desktop computer and the terminal so that you have the most up-to-date content in both locations.

Use Pocket Excel to create workbooks, such as expense reports and mileage logs.


To create a new file, tap **Start > Programs > Pocket Excel > New**. A blank workbook appears.

If you've selected a template for new workbooks in the Options dialog box, that template appears with appropriate text and formatting already provided.

You can open only one workbook at a time; when you open a second workbook, you'll be asked to save the first. You can save a workbook you create or edit in a variety of formats, including Pocket Excel (.pxl) and Excel (.xls).

Pocket Excel contains a list of the files stored on your device. Tap a file in the list to open it. To delete, make copies of, and send files, tap and hold a file in the list. Then select the appropriate action from the pop-up menu.

Pocket Excel provides fundamental spreadsheet tools, such as formulas, functions, sorting, and filtering. To display the toolbar, tap **View > Toolbar**.

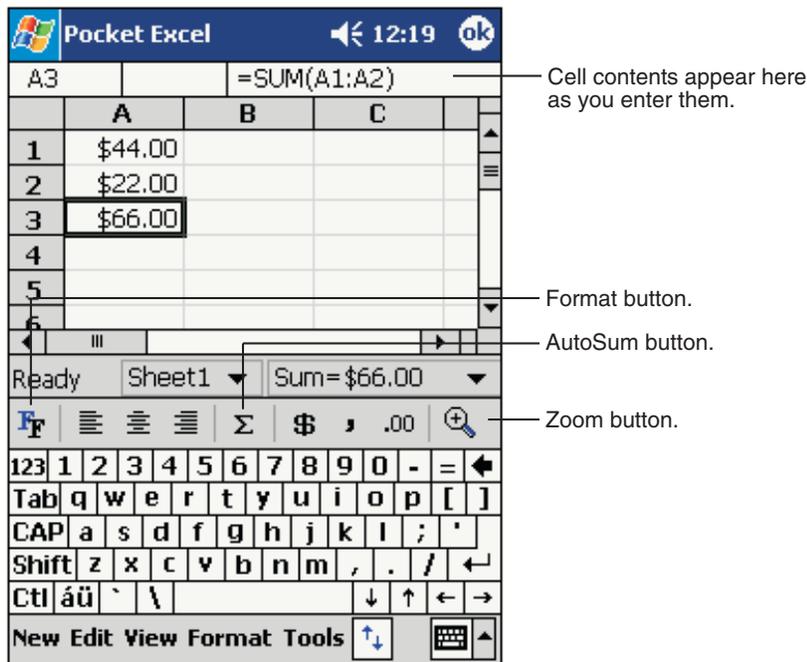

If your workbook contains sensitive information, you can protect it with a password. To do so, open the workbook, tap **Edit**, and then **Password**. Every time you open the workbook, you will need to enter the password, so choose one that is easy for you to remember but hard for others to guess.

### Tips for Working in Pocket Excel

When working in large worksheets in Pocket Excel:

- View in full-screen mode to see as much of your worksheet as possible. Tap **View** and then **Full Screen**. To exit full-screen mode, tap **Restore**.
- Show and hide window elements. Tap **View** and then tap the elements you want to show or hide.
- Freeze panes on a worksheet. First select the cell where you want to freeze panes. Tap **View > Freeze Panes**. You might want to freeze the top and left-most panes in a worksheet to keep row and column labels visible as you scroll through a sheet.
- Split panes to view different areas of a large worksheet. Tap **View > Split**. Then drag the split bar to where you want it. To remove the split, tap **View > Remove Split**.
- Show and hide rows and columns. To hide a hidden row or column, select a cell in the row or column you want to hide. Then tap **Format > Row or Column > Hide**. To show a hidden row or column, tap **Tools > Go To**, and then type a reference that is in the hidden row or column. Then tap **Format > Row or Column > Unhide**.

For more information on using Pocket Excel, tap **Start > Help**.



## Dolphin 9500/9550 HomeBase

### Overview

As the hub of your Dolphin 9500/9550 system, the Dolphin HomeBase charging and communication cradle supports both RS-232 and USB communications, which make it able to interface with the majority of PC-based enterprise systems. When a terminal is seated in the HomeBase, its main battery pack charges in less than four hours.

### Power

The HomeBase completes a full charge of the main battery pack in less than four hours. The HomeBase also provides power to the intelligent battery charging system in all Dolphin terminals that senses when a full charge has been achieved and switches to a trickle charge to maintain the full charge.

### Communications

Reliable data communications at speeds of up to 115k baud can be transmitted by the HomeBase through the RS-232 serial port. Using the full-speed USB port, the data transmission rate goes up to 12 Mbps.

HomeBases cannot be physically connected to each other - sometimes referred to as “daisy-chained” - but can be networked together via a serial or USB hub.

### Convenient Storage

Intelligent battery charging makes the Dolphin HomeBase a safe and convenient storage receptacle for your Dolphin terminal.

### Capacity

The Dolphin HomeBase holds one terminal and features an auxiliary battery well behind the terminal well that can charge a battery pack independently of the terminal well. This means that one HomeBase can charge two battery packs: the one installed in the terminal and a spare.



*Use only Dolphin 9500 series peripherals, power cables, and power adapters. Use of peripherals, cables, or power adapters not sold/manufactured by HHP will void the warranty and may damage the terminal.*




*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

---

## Dolphin 9500/9550 HomeBase Parts and Functions

### Front Panel

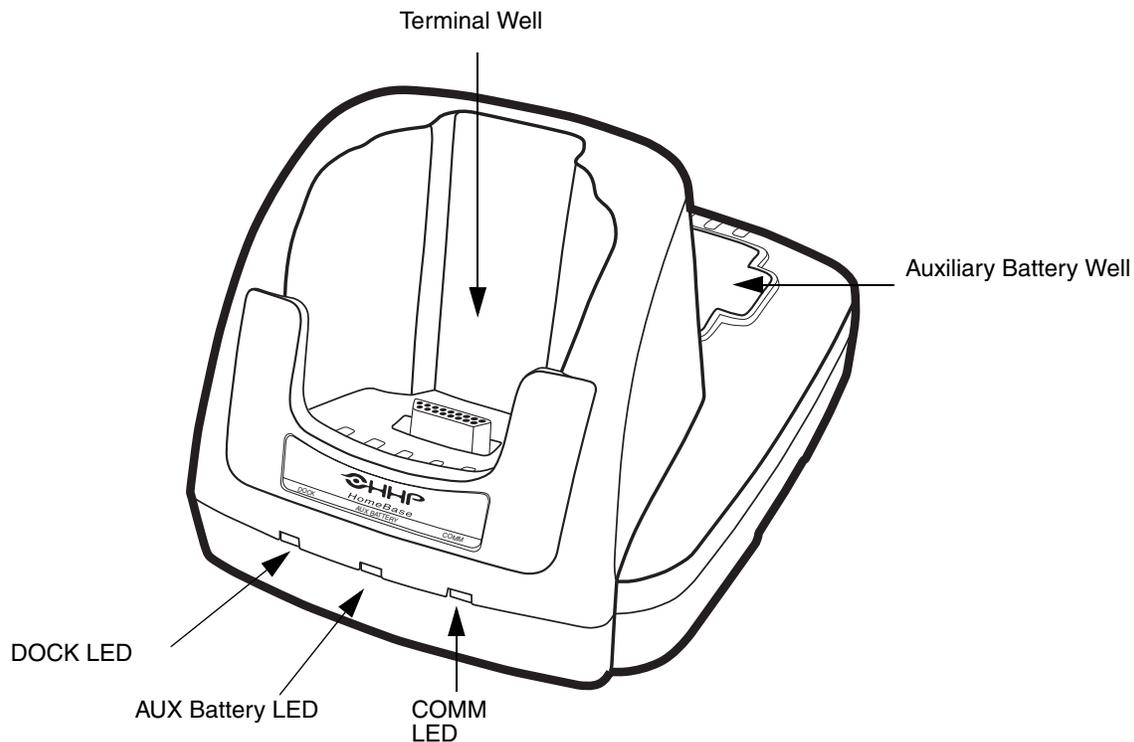

### Terminal Well

Place the Dolphin terminal in this well to communicate with a host device, power the terminal, and charge its battery pack. If the host device is a desktop computer that uses ActiveSync, synchronization begins immediately. While seated in the terminal well, the main battery installed in the terminal charges. The HomeBase completely charges a battery pack in less than four hours.

### Auxiliary Battery Well

See [Auxiliary Battery Well](#) on page 10-4.

### DOCK LED

Turns solid green when the Dolphin terminal is properly seated in the Dolphin HomeBase. When this light is on, the terminal is connected to the base.

### AUX Battery LED

Indicates status of the battery charging in the auxiliary battery well.

<b>This color</b>	<b>means...</b>
<b>Orange</b>	The auxiliary battery is charging.
<b>Green</b>	The auxiliary battery has completed charging and is ready for use.

To see the auxiliary battery well, see [Rear Panel](#) on page 10-4.

---

For information about charging a battery in the auxiliary battery well, see page [10-7](#).

## **COMM LED**

This is the communication LED. It indicates the status of data transfer between the Dolphin terminal and the host device. The color of this LED differs if the HomeBase is using the serial or USB port connection.

### **If using the serial port**


<b>This color</b>	<b>means...</b>
<b>Red</b>	Serial data is being sent from the Host Device to the Dolphin HomeBase.
<b>Green</b>	Serial data is being sent from the Dolphin HomeBase to the Host Device.
<b>Orange</b>	Serial data is being sent at high data rates.

### **If using the USB port**

<b>This color</b>	<b>means...</b>
<b>Green LED</b>	A USB Connection is established with the host computer.

---

## Rear Panel

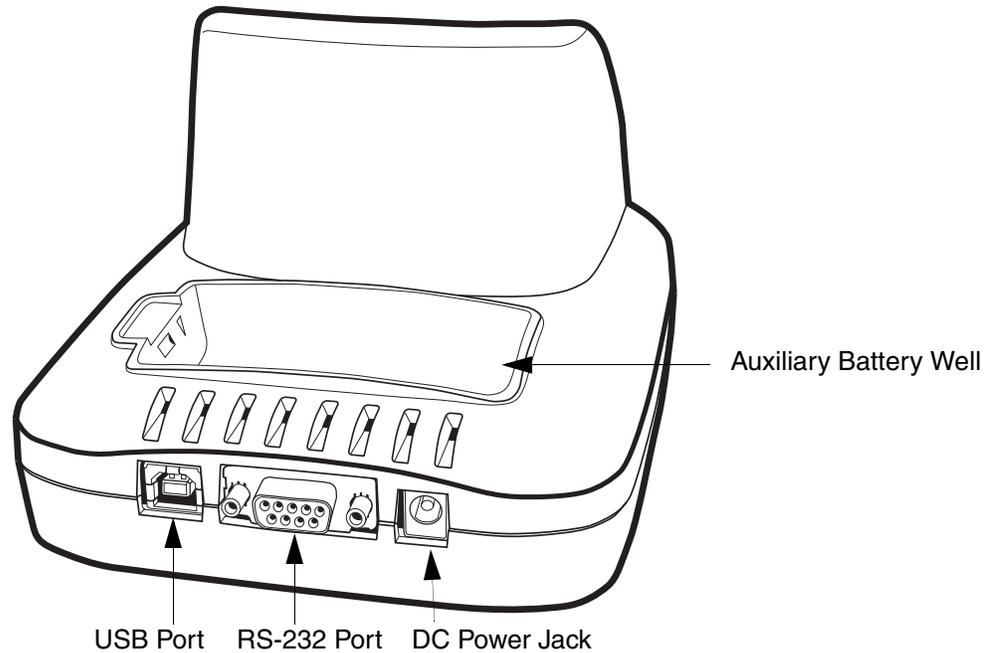

### Auxiliary Battery Well

The HomeBase enables you to charge an additional Li-ion battery pack independently of the terminal well. This feature ensures that you can always have a fully-charged battery for your Dolphin terminal. See [Powering the HomeBase](#) on page 10-5.

### USB Port

This USB Port is full-speed and 2.0 compliant. Using a USB cable, you can connect the HomeBase to a peripheral device, such as a desktop computer or printer. When the Dolphin 9500/9550 is seated in the terminal well, it is connected to the peripheral device via the HomeBase.

The USB port on the HomeBase requires that you use ActiveSync 3.7 or higher.

### RS-232 Port

Use a 9-pin, RS-232 cable from HHP to connect this port to a peripheral device for RS-232 data communication. For more information, see [HomeBase Serial Connector](#) on page 10-6.

### DC Power Jack

Use a power cable from HHP to supply power to this power jack. For more information, see [Powering the HomeBase](#) on page 10-5.

---

## *Powering the HomeBase*

The terminal requires 9.5 Volts DC input for communications and battery charging; the HHP power cable contains a power adapter that converts the power source voltage accordingly. **Only** the power adapter cable from HHP converts the voltage appropriately.


HHP recommends that you leave the Dolphin HomeBase connected to its power source at all times, so that it is always ready to use.

1. Connect the HHP power cable to the DC jack on the rear panel of the HomeBase.
2. Connect the HHP power cable to the power adapter.
3. Plug the power adapter cable into the power source.
4. The HomeBase is now powered.

---

## ***HomeBase Serial Connector***

The following diagram displays the pin diagram of the serial connector of the HomeBase.

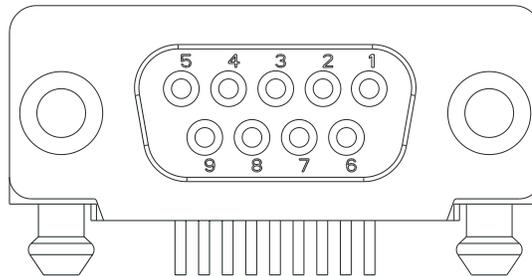

<u>Pin #</u>	<u>Description</u>
1	Internal Jumper to Pin 6
2	TXD
3	RXD
4	DSR
5	GND
6	DTR
7	CTS
8	RTS
9	RI

*Note:* Signals referenced are for a DTE device. The HomeBase is at a right-angle to the printed circuit board (PCB). The ninth pin has a ring indicator (RI).

---

## ***Charging the Main Battery***

The Dolphin HomeBase powers the terminal and fully charges its main battery pack in less than four hours. The HomeBase contains an intelligent battery charging system that protects the battery from being damaged by overcharging; the unit senses when a battery pack is fully charged and automatically switches to a trickle charge that maintains the battery at full capacity. Therefore, Dolphin terminals may be stored in the HomeBase without damage to the terminals, battery packs, or peripherals.

To check battery power, use the Power system setting; see [Power](#) on page 5-11.

For more information about HHP Li-ion batteries, see [Batteries](#) on page 3-10.

### ***To Power a Terminal and Charge its Main Battery***


1. Install the battery pack in the terminal; see [Install the Main Battery Pack](#) on page 2-6.
1. Connect the HomeBase to the power supply provided by HHP.
2. Slide the terminal into the terminal well until the Dock LED lights green to indicate that the terminal is properly seated.
3. The battery pack begins charging.

### ***Charging a Spare Battery Using the Auxiliary Battery Well***

The auxiliary battery well located on the back of the HomeBase charges a spare battery independently of the terminal well. The Aux Battery LED on the front panel indicates the status of the battery in this well. Charge time is less than four hours.

To see this well, see [Auxiliary Battery Well](#) on page 10-2.

1. Insert the end of the battery without the locking tab into the bottom of the auxiliary well opening.
2. Snap the battery into place with a hinging motion. The Aux Battery LED lights orange.
3. Use the AUX Battery LED to monitor charging progress.

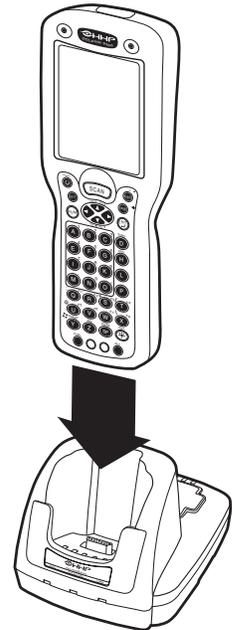

---

## Communications

### Communications Types

#### RS-232

The HomeBase supports RS-232 communications via the RS-232 Communications Port located on the back of the device. This port enables the Dolphin terminal to communicate to a personal computer, modem, or any RS-232 device using a standard serial cable and communications software.

#### USB

The HomeBase also supports USB communications via the USB port located on the back. The HomeBase acts as a USB device by interfacing the USB signals of the Dolphin 9500/9550 to the USB of the host computer. Using a standard USB cable, the HomeBase's USB interface allows the Dolphin terminal to communicate with a personal computer or to be networked through a USB hub.

*Note:* The HomeBase should have only one type of interface cable connected at a time, either USB or RS-232. You must be using ActiveSync, version 3.7 or higher.

### Equipment Requirements

To use the HomeBase for communications, you need the following equipment:

- A HomeBase powered by the HHP power cable and HHP power adapter cable
- For RS-232 communications, a Serial cable
- For USB communications, a USB cable

### Setting up the HomeBase for RS-232 Communications

#### Connecting the Cables

Connect the HomeBase to the host computer or other device by plugging an RS-232 serial cable into the RS-232 Communications Port on the rear of the HomeBase. The wiring of your cable depends on whether the other device is set up as a Data Communications Equipment (DCE) or Data Terminal Equipment (DTE) device.

The HomeBase Communication Port is configured as a DCE device. To communicate with a DCE device, use either a null modem adapter in line with a standard RS-232 cable, or a null-modem serial cable. To communicate with a DTE device such as a computer, use a standard (or straight-through) RS-232 cable.

You can make your own cables by following the pin configuration in the chart below. To do so, you must determine if your host RS-232 device is 9-pin or 25-pin, and whether it is configured as a DCE or DTE device.

HomeBase /Host Port (DCE)	IBM AT DB9 (DTE)	IBM XT DB25 (DTE)	Modem DB25 (DCE)
Pin / Input Signal			
2 / (RD)	2	3	2
3 / (TD)	3	2	3
5 / (SG)	5	7	7
4 / (DTR)	4	20	6
6 / (DSR)	6	6	20
7 / (RTS)	7	4	5
8 / (CTS)	8	5	4

*Note:* The HomeBase **cannot** be daisy-chained.


---

## Setting up the Terminal

The Dolphin terminal may be configured for communications using the ActiveSync options as described in Chapter 2 or manually as described below.

To set Communications Properties, complete these steps:

1. Select **Start > ActiveSync > Tools > Options**.
2. Select the **PC** tab.
3. Check the **Enable synchronization** box and select the desired option from the pull-down list; 115200 Default is recommended for an RS-232 connection.

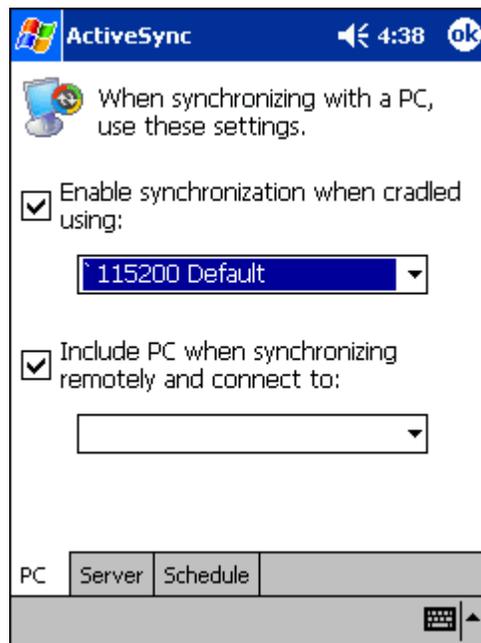


4. Tap **OK**.
5. Place the Dolphin in the cradle. The Dolphin 9500/9550 attempts to start an ActiveSync connection with the desktop computer automatically.

## Setting up the Desktop Computer

ActiveSync must be installed and configured for RS-232 on the desktop computer to sync successfully with a Dolphin 9500/9550 device that is configured for RS-232 communication.

---

The following graphic displays the correct ActiveSync Connection Settings on the desktop computer for an RS-232 connection.

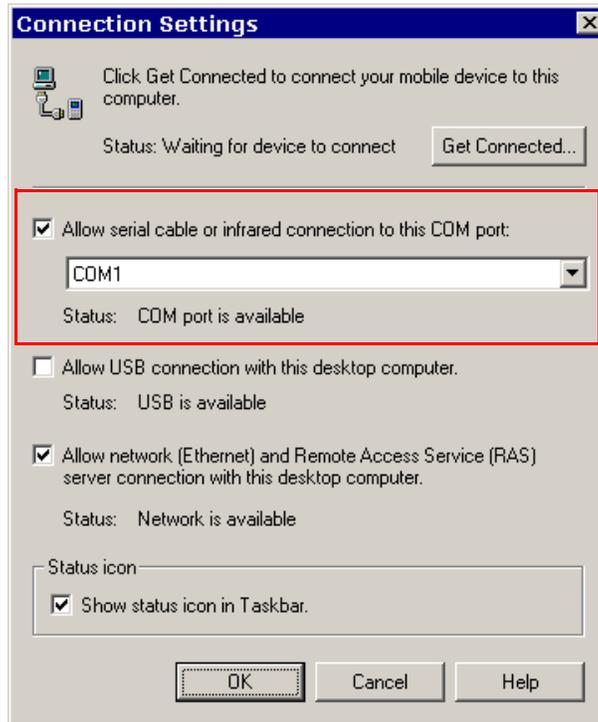

*Note:* You can have the USB connection box checked in addition to the serial cable box without affecting processing. However, you would most likely use one or the other.

### ***Setting up the HomeBase for USB Communication***

The Dolphin 9500/9550 terminal is defaulted to support USB communications out of the box.

#### **Required Equipment:**

- HomeBase with power supply
- USB Cable
- ActiveSync v3.7 or above
- Windows® 98 second edition\*, Windows® Me, Windows® 2000, or Windows® XP computer.

*Note:* The HomeBase does not support Windows NT® when using a USB connection. This is because Windows NT does not support USB.

\*Windows® 98 second edition provides full USB support.

### **To Install the HomeBase Using USB**

*Note:* You must be using ActiveSync 3.7 or higher.

Complete these steps:


1. Plug in the power supply and connect it to the back of the HomeBase.
2. Plug the USB cable into the back of the HomeBase.
3. At this point, the hardware is installed and operating. You may need to reboot your PC to complete the installation process.

---

## Setting up the Terminal

To select ActiveSync options:

1. Select **Start > ActiveSync > Tools > Options**.
2. Select the **PC** tab.
3. Check the **Enable synchronization** box and select 'USB Connection' from the drop-down list.

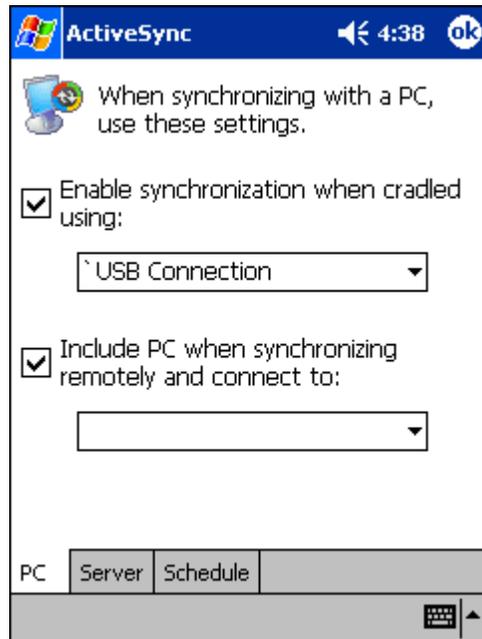


4. Tap **OK**.
5. Place the Dolphin in the cradle. The Dolphin 9500/9550 attempts to start an ActiveSync connection with the desktop computer automatically.

## Setting up the Desktop Computer

After the USB HomeBase is installed, you can use ActiveSync to connect to a Dolphin 9500/9550 terminal that is properly seated in the HomeBase. These instructions assume that ActiveSync v3.7 is installed on your PC.

---

The ActiveSync Connection Settings must be set as the following graphic indicates.

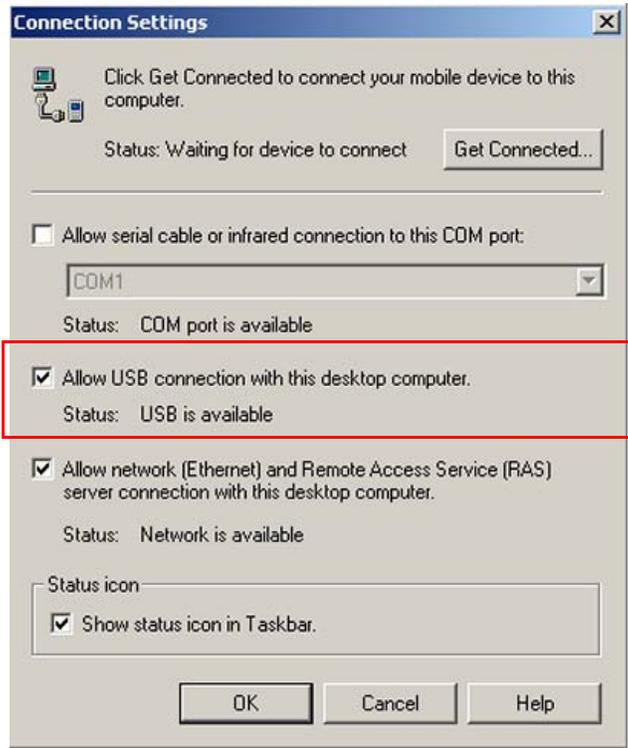

The **Allow USB connection with this desktop computer** box must be checked. Do *not* check the serial cable box.

### ***Communicating with the Dolphin 9500/9550 Terminal***

To initiate communications between the Dolphin 9500/9550 and its peripheral, complete these steps:

1. Insert the Dolphin 9500/9550 into the terminal well of the HomeBase.
  - The DOCK LED illuminates green. If the DOCK LED does not illuminate, make sure that the terminal is properly seated. You may need to remove and re-insert the terminal.
  - The Dolphin terminal activates; if the power is off, the terminal automatically powers on. If the terminal does not power on, verify that the HHP power supply is properly connected to the cradle and plugged into a functioning outlet.
  - The Dolphin 9500/9550 terminal automatically opens ActiveSync to establish a connection.
2. The HomeBase can now transfer data between the terminal and the host device. If communication does not occur, check the port connections to ensure that the cradle is correctly configured.

### ***Verifying Communication***

You can verify that the USB driver is functioning by watching the COMM LED on the USB HomeBase. When the COMM LED illuminates solid green, the HomeBase is communicating with the host device.

### ***Verifying Data Transfer***

The COMM LED flashes when data is being transferred via the HomeBase. For an RS-232 connection, the COMM LED flashes red and green. For a USB connection, the COMM LED flashes green.

---

## ***Mounting the HomeBase***


Set the Dolphin HomeBase on a dry, stable surface, such as a desktop or workbench near an electrical outlet. Be sure to provide enough workspace with good lighting for the user to view and operate the Dolphin terminal while it is in the HomeBase.

When choosing a location, bear in mind that:

- the mounting location must allow users easy access to the Auxiliary Battery Well, and
- the serial and USB ports as well as the power jack face straight out of the rear panel, and you will most likely want easy access to them in the future.

### ***Desk Mounting***

Dolphin charging/communication cradles have a DIN rail (7.5 X 35 mm) slot on the bottom to allow for secure desk attachment of the unit if desired.

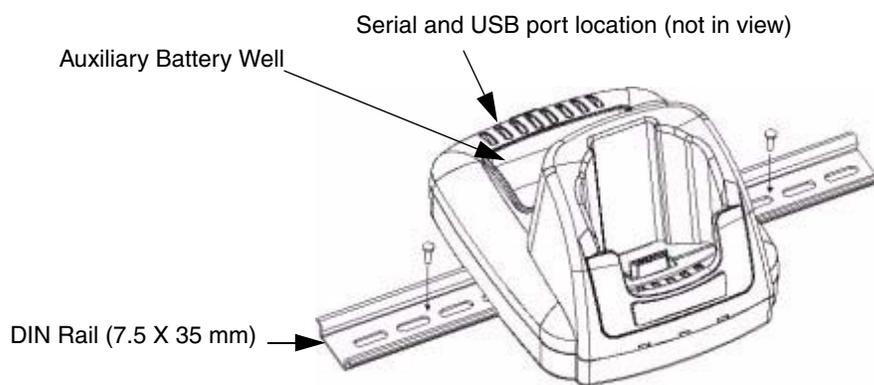

To mount the HomeBase, you slide the DIN rail slot along the bottom panel and secure it. Then, using the appropriate nuts and bolts, secure the DIN rail to the desk or flat surface.

### ***Wall Mounting***


A wall mount kit that contains a screws and a mounting bracket can be purchased separately.

Please be advised that the bottom panel of the HomeBase contains four rubber feet - one at each corner - that help keep it stable and secure when resting on a flat surface. Those rubber feet should be removed with pliers before wall mounting the HomeBase.

---


The following diagram displays how to wall-mount a Homebase:

1. Secure screws to the bottom panel by sliding them into the available slots

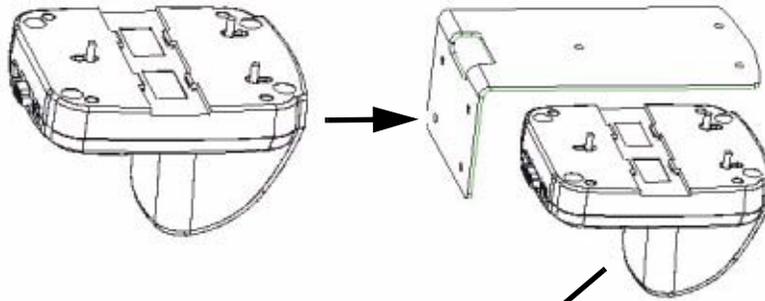


2. Attach the bottom panel to the mounting bracket - match the holes to the secured screws

3. Fasten the screws to secure the HomeBase to the mounting bracket

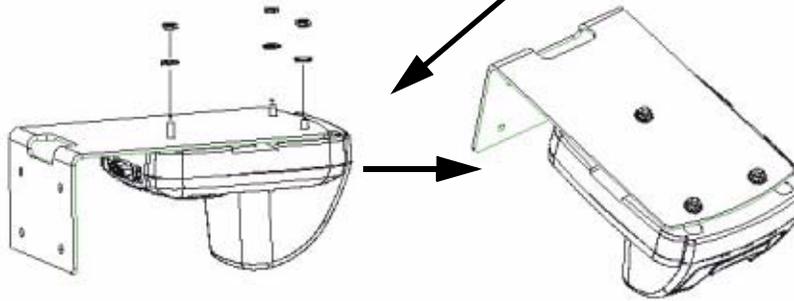

4. Turn the secured HomeBase right side up.

5. Using the appropriate screws, secure the mounting bracket to the wall or vertical surface as shown.

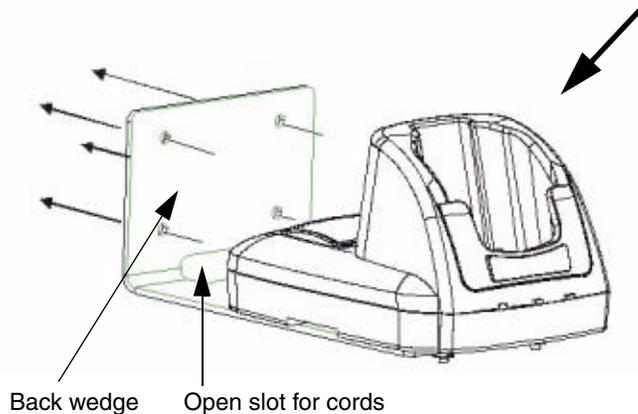

The back wedge of the mounting bracket contains an open slot for the power and communications cables. There is an extra space between this slot and the rear panel of the HomeBase to allow easy access to the power and communications ports. For more details on both ports, see [Rear Panel](#) on page 10-4.

## Dolphin 9500/9550 Mobile Base

### Overview

The Dolphin Mobile Base charging and communication cradle is designed specifically for in-premise and in-transit data collection applications. It features a flexible mounting bracket, a cigarette lighter adapter, and a power cable to adapt it to your environment.

When a terminal is seated in the Mobile Base, its main battery pack charges in less than four hours. The serial connector supports RS-232 communication and power out to peripheral devices, such as hand held scanners.

As the hub of your Dolphin 9500/9550 mobile data collection system, the Mobile Base performs three important functions: charging, communications, and storage.

### Charging

The Dolphin Mobile Base completes a full charge of the main battery pack in less than four hours. The Mobile Base also provides power to the intelligent battery charging system in all Dolphin terminals that senses when a full charge has been achieved and switches to a trickle charge to maintain the full charge.

### Communications

The Mobile Base transmits data to other devices at speeds of up to 115K baud via its RS-232 serial port.

### Convenient Storage

Intelligent battery charging makes the Dolphin Mobile Base a safe and convenient storage receptacle for your Dolphin terminal.

### Capacity

The Dolphin Mobile Base holds one terminal.



*Use only Dolphin 9500 series peripherals, power cables, and power adapters. Use of peripherals, cables, or power adapters not sold/manufactured by HHP will void the warranty and may damage the terminal.*




*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

---

## Mobile Base Parts and Functions

### Front Panel

The front panel of the Mobile Base has one slot. The following graphic features the Mobile Base with the Dolphin 9500 inserted into the Terminal Well.

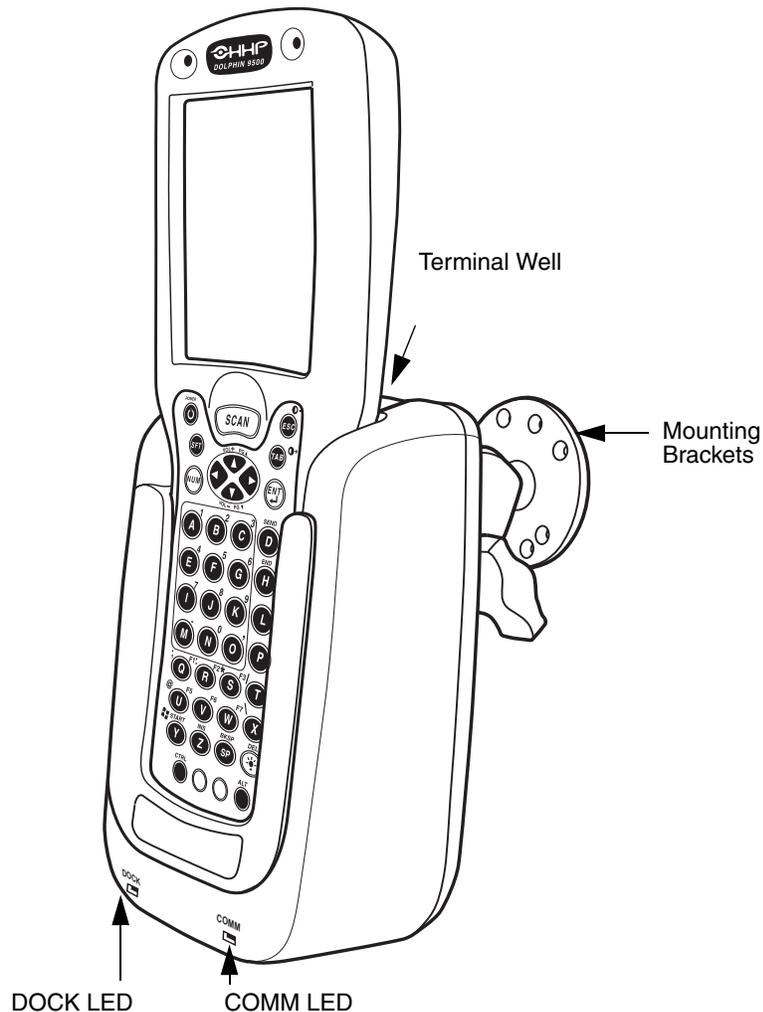

#### **Terminal Well**

Place the terminal in this well to communicate with a host device and charge the main battery pack.

#### **Mounting Brackets**

Use these to mount the Mobile Base to a fixed location.

#### **DOCK LED**

Illuminates solid green when the Dolphin terminal is properly seated in the terminal well.

#### **COMM LED**

Indicates the status of data transfer between the host device and the Dolphin terminal

#### **COMM LED color**

#### **Indicates that...**

#### **Red**

Data is being sent from the Host Device to the Dolphin Mobile Base.

#### **Green**

Data is being sent from the Dolphin Mobile Base to the Host Device.


#### **Orange**

Data is being sent at high data rates.

---

## Bottom Panel

The power supply and RS-232 connectors are located on the bottom of the unit.

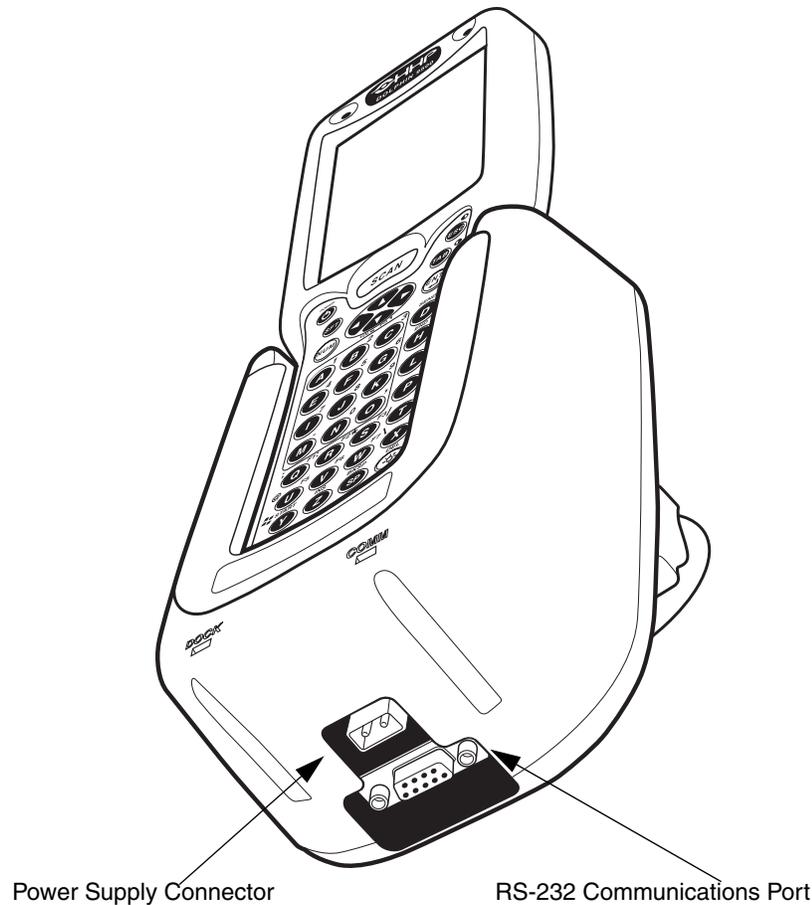

### Power Supply Connector

Use this connector to attach an HHP power cable to the Dolphin 9500/9550 Mobile Base. The Mobile Base can be powered by an external DC power source of between 11 VDC to 48 VDC.

To run on vehicle power, you can use the 12 VDC cable or 24 VDC cable option. The appropriate cable comes with the kit you ordered. The 12 VDC cable can be used with a cigarette lighter outlet. The 24 VDC, pigtail cable can be used to “hard-wire” into the vehicle power bus.



*Verify that the power source is always within the specified range and observe correct input voltage polarity. An improper input voltage range (above the 48 VDC maximum) or reverse polarity could damage the power conversion circuitry.*

### RS-232 Communications Port

Use a standard serial cable to connect the unit to a host device via RS-232; see [Mobile Base Serial Connector](#) on page 11-8.

---

## ***Powering the Dolphin Terminal***

When seated in a Mobile Base that is connected to the appropriate power source, the Dolphin terminal receives the power to charge its main battery and run its internal circuitry. Keep the Mobile Base plugged into the power source so that the Dolphin terminal battery pack stays fully charged.

For more information about powering the Mobile Base, see [Powering the Dolphin Mobile Base](#) on page 11-6.

## ***Charging the Dolphin Terminal***

The Mobile Base supplies charging power to the Dolphin terminal so that the terminal can monitor the charging of its battery pack. This charging method protects the battery from being damaged by overcharging. Therefore, the Dolphin terminal may be stored indefinitely in the Mobile Base without damage to the terminal, the battery pack, or the Mobile Base.

To charge a Dolphin terminal, complete these steps:

1. Insert a battery pack into the Dolphin terminal.
2. Slide the terminal, imager window up and the LCD visible, into the terminal well of the Mobile Base until it stops.
3. When the Dolphin terminal is properly seated, the DOCK LED on the Mobile Base illuminates solid green. The terminal begins charging automatically.

---


## ***Installing the Dolphin Mobile Base***

To install the Dolphin Mobile Base, you need to mount it securely to an appropriate location and supply it with power.

### ***Mounting the Mobile Base***

The adjustable mounting bracket holds the terminal securely in place and gives the user a variety of options for mounting the Mobile Base. When selecting a location, keep in mind that the power supply and serial connectors point straight out the bottom panel.

#### **Back Panel and Brackets**

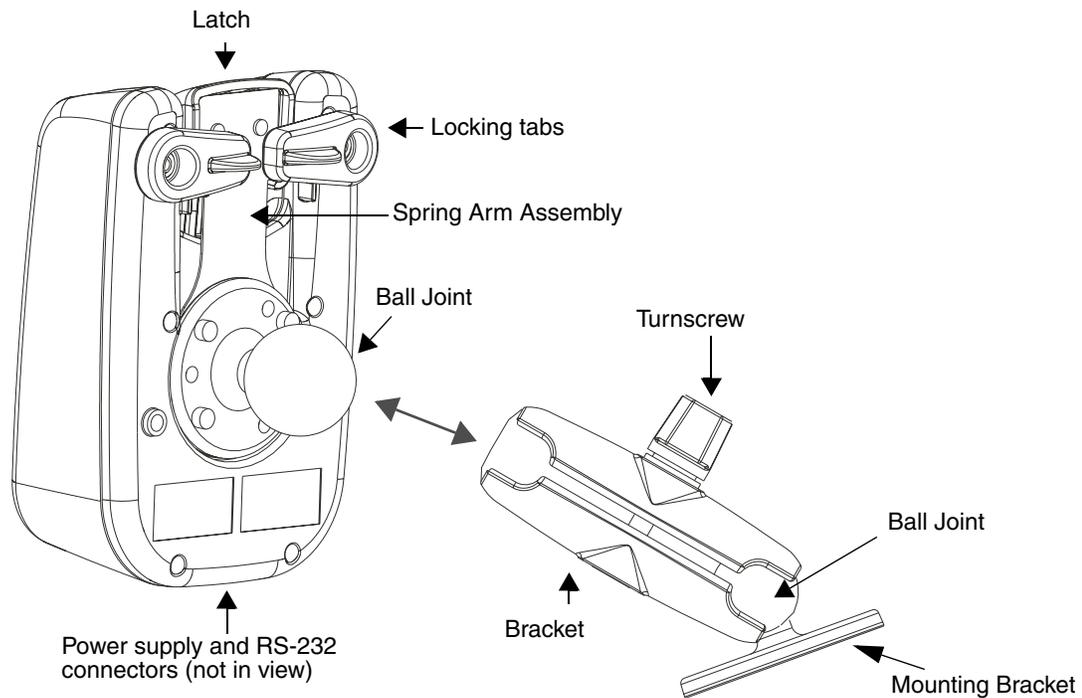

Complete these steps:

1. Loosen the turnscrew.
2. Insert the ball joint of the mounting bracket to the back of the bracket.
3. Insert the ball joint on the back of the Mobile Base into the other side of the bracket.
4. Tighten the turnscrew to secure both ball joints.
5. Secure the mounting bracket to the appropriate location.

### **Back Panel**

#### **Latch**

The latch sits on top of the spring arm assembly and holds the back of the terminal securely in place. The graphic above displays the mounting of a Dolphin 9500 terminal. There is another Dolphin Mobile Base that contains a special latch to accommodate the pistol-grip handle on the Dolphin 9550.

---

## Locking Tabs

When positioned as shown in the above graphic, the locking tabs secure the spring arm assembly, latch, and terminal in place. When seating a terminal, turn both arms up to allow the spring arm to move as necessary while the terminal is being inserted. After the terminal is seated, turn both arms toward the center to lock them.

The both locking tabs must be pointing up to insert or remove a terminal in the Mobile Base.

## Spring Arm Assembly

The spring arm assembly is the column that connects the latch to the back of the Mobile Base.

## Ball Joints

There are two ball joints: one on the back of the Mobile Base and one on the mounting bracket. Both ball joints are inserted into the bracket and secured to mount the Mobile Base.

## Connectors

The power and RS-232 connectors are located on the bottom panel. For more information, see [Bottom Panel](#) on page 11-3.

## *Brackets*

### Bracket

The bracket contains the turn screw and two slots. Ball joints are inserted into each slot and secured with the turn screw.

### Turn screw

The turn screw is located on the top of the bracket. Rotate the turn screw to secure or loosen the ball joint slots.

### Mounting Bracket

The mounting bracket is what you attach to the mounting surface. It is comprised of a ball joint and flat disk. The disk contains drill holes you use to secure the Mobile Base to the mounting surface.

## *Powering the Dolphin Mobile Base*

*Note:* HHP recommends that you leave the Mobile Base connected to its power source at all times.

The Mobile Base is powered via the power connector on the bottom panel; see [Bottom Panel](#) on page 11-3. Both the power and serial connectors are straight out, not at an angle.

The Mobile Base must be powered by a 12 to 48 volt DC source.

---

## ***Setting the Mobile Base Up for Communications***

The Mobile Base RS-232 interface allows the Dolphin terminal to communicate to a personal computer, modem, or any standard RS-232 device using a standard serial cable and communications software.

### ***Connecting the Cables***

Connect the Mobile Base to the host computer or other device by plugging an RS-232 serial cable into the RS-232 Communications Port on the bottom of the Mobile Base. Plug the other end of the RS-232 serial cable into the correct port on the host RS-232 device.

The wiring of your cable depends on whether the other device is set up as a Data Communications Equipment (DCE) or Data Terminal Equipment (DTE) device.

The Mobile Base Communication Port is configured as a DCE device. To communicate with a DTE device such as a computer, use a standard (or straight-through) RS-232 cable. To communicate with a DCE device, use either a null modem adapter in line with a standard RS-232 cable, or a null-modem serial cable.

### **RS-232 Pin Configuration**

<b>Mobile Base /Host Port (DCE)</b>	<b>IBM AT DB9 (DTE)</b>	<b>IBM XT DB25 (DTE)</b>	<b>Modem DB25 (DCE)</b>
Pin / Input Signal			
2 / (RD)	2	3	2
3 / (TD)	3	2	3
5 / (SG)	5	7	7
4 / (DTR)	4	20	6
6 / (DSR)	6	6	20
7 / (RTS)	7	4	5
8 / (CTS)	8	5	4


Refer to this table if you want to make your own cables. To do so, you must determine if your host RS-232 device is

- 9-pin or 25-pin and
- configured as a DCE or DTE device.

---

## ***Mobile Base Serial Connector***

The following diagram displays the pin diagram of the serial connector of the bottom panel of the Mobile Base.

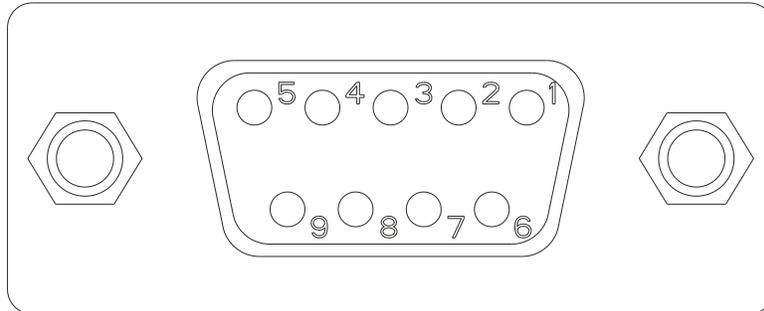

<u>Pin #</u>	<u>Description</u>
1	Internal Jumper to Pin 6
2	TXD
3	RXD
4	DSR
5	GND
6	DTR
7	CTS
8	RTS
9	5 VOLT OUT

*Note:* Signals referenced are for a DTE device.

The Mobile Base connector is straight to the printed circuit board (PCB). The ninth pin sends 500mA at 5V power out. This can power a peripheral device, such as a mobile printer, as long as that peripheral device can accept 500mA at 5V.

## ***Configuring the Dolphin Terminal***


Communications Properties must be configured appropriately on the Dolphin 9500/9550 terminal for it to communicate with the Mobile Base.

To set Communications Properties:

1. Tap **Start > ActiveSync > Tools > Options**.
2. Tap the **PC Connection** tab
3. Check the **Enable Synchronization** check box.

---

4. Select the appropriate baud rate for connecting to the RS-232 Host Device; '11520 is the default.

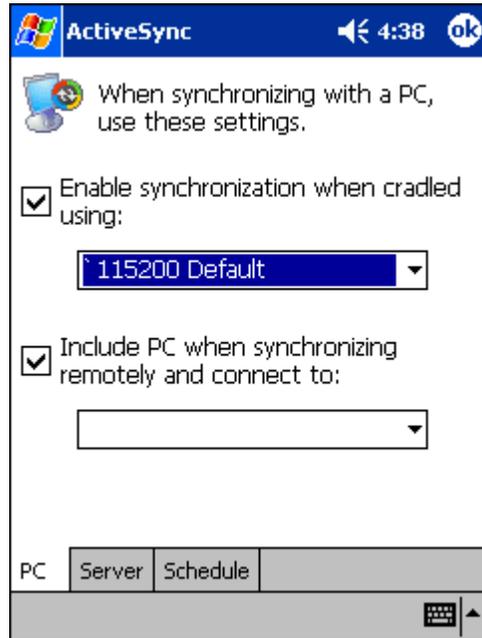

5. Tap **OK** and close the ActiveSync window on the Dolphin 9500/9550 terminal.

6. Place the Dolphin in the Mobile Base. Synchronization begins immediately.



## Dolphin 9500/9550 ChargeBase

### Overview

The Dolphin ChargeBase is a four-slot charging cradle that can power four Dolphin terminals, and charge their main batteries in less than four hours.

### Charging

The Dolphin ChargeBase completes a full charge of the main battery pack in less than four hours. The ChargeBase also provides power to the intelligent battery charging system in all Dolphin terminals that senses when a full charge has been achieved and switches to a trickle charge to maintain the full charge.

As battery packs charge, the charging circuitry follows the two-step charging process (CC-CV) that is recommended for Li-Ion batteries. The process monitors changes in temperature, current, and voltage.

### Convenient Storage

Intelligent battery charging makes the Dolphin ChargeBase a safe and convenient storage receptacle for your Dolphin terminal.

### Capacity

The ChargeBase can hold up to four Dolphin 9500/9550 terminals. Each charging slot charges each terminal independently of the other slots.



*Use only Dolphin 9500 series peripherals, power cables, and power adapters. Use of peripherals, cables, or power adapters not sold/manufactured by HHP will void the warranty and may damage the terminal.*




*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

---

## *Dolphin ChargeBase Parts and Functions*

### *Front Panel*

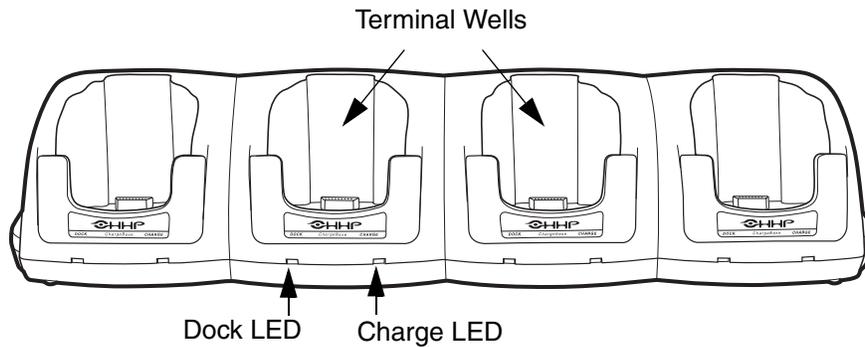

### **Terminal Wells**

The ChargeBase contains four terminals wells. Each well

- Holds and charges the main battery pack of one Dolphin 9500/9550 terminal.
- Contains the companion to the industrial-grade, 17-pin connector on the bottom panel of Dolphin 9500/9550 terminals.
- Has two LEDs on the front: the Dock LED and the Charge LED.


### **Dock LED**

Each terminal well displays a Dock LED on the front that lights solid green when a terminal is properly seated, which means that the terminal and the base are connected.

### **Charge LEDs**

Each terminal well displays a Charge LED on the front that lights green to indicate charging. For details, see [Charging Terminals in the ChargeBase](#) on page 12-5.

### *Back Panel*

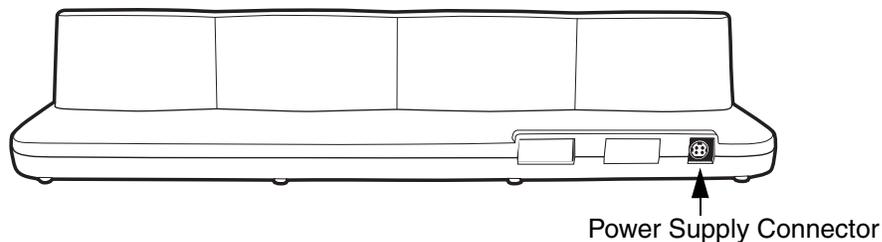

### **Power Supply Connector**


This connector receives input from the power adapter. Plug the power connector cable from the power adapter into this connector.

*Note:* There is no ON/OFF switch on the back panel of the ChargeBase. The power switch is on the power adapter.

---

## Power Supply

The ChargeBase includes a power supply that contains a power adapter to ensure the proper voltage. The power adapter is plugged into standard AC/DC outlets.

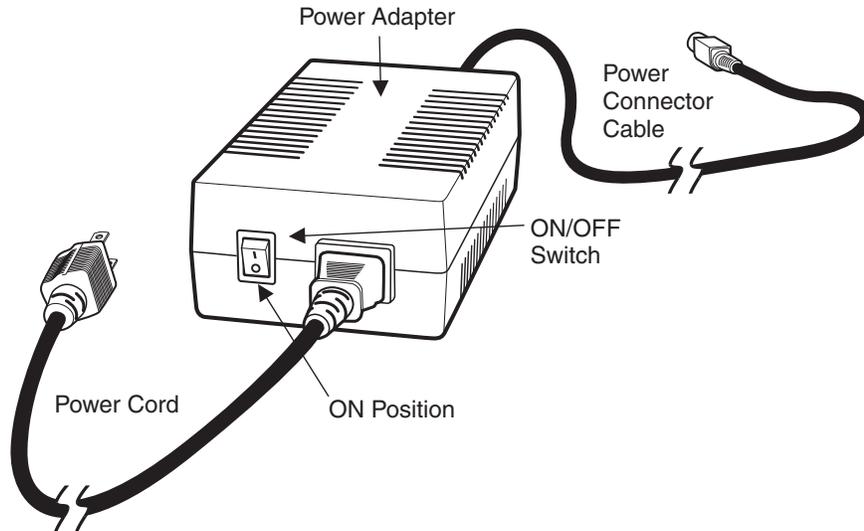

## Supplying Power to the ChargeBase



*Using a non-HHP power adapter voids your warranty and could result in serious damage to the circuitry of the Dolphin ChargeBase.*


1. Be sure the power switch on the power adapter is in the OFF position.
2. Plug the power cord into the power adapter.
3. Plug the power connector cable into the power connector on the back panel of the ChargeBase.
4. Plug the power cord into a standard wall outlet.
5. On the power adapter, turn the power switch to the ON position. The LEDs illuminate as the ChargeBase powers up.
6. The ChargeBase is ready to begin charging terminals.

---

## ***Inserting and Removing Terminals***

### ***Inserting***

1. Hold the terminal with the bottom panel perpendicular to the base.

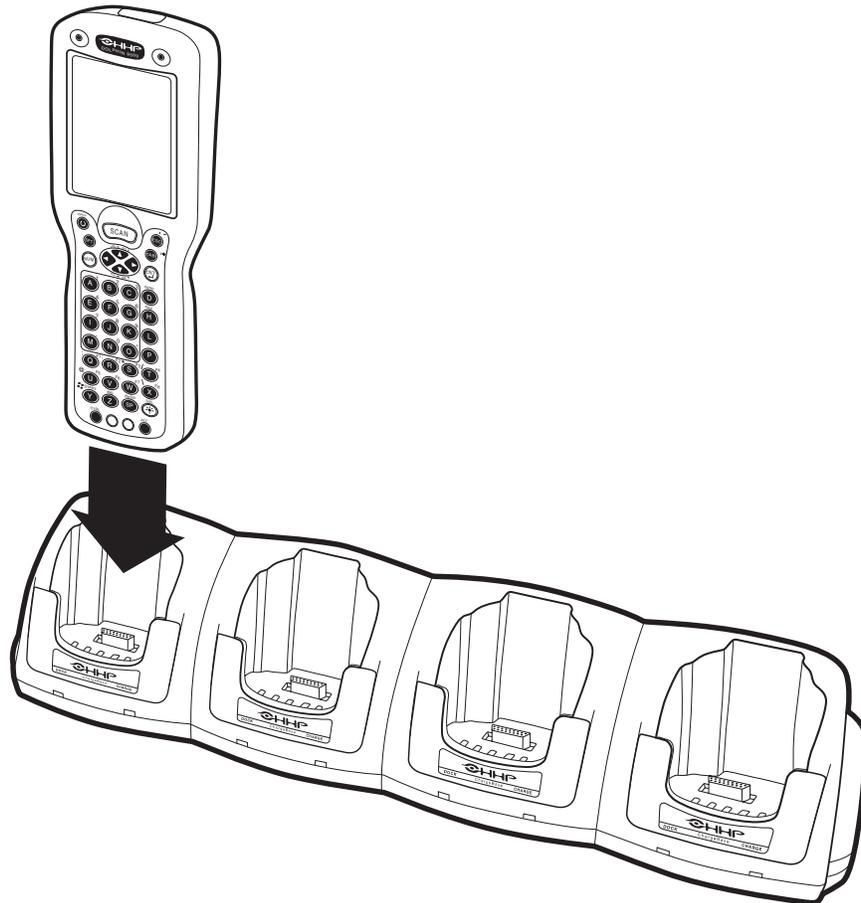

2. Slide the terminal into the well until the Dock LED lights solid green.
3. Charging begins immediately.

### ***Removing***

To remove a terminal, grasp it firmly in your hand and lift it up and out of the terminal well. The LEDs for the terminal well turns off.

---

## ***Charging Terminals in the ChargeBase***

The Dolphin ChargeBase charges the main battery of each terminal in less than four hours. The ChargeBase uses the intelligent battery charging system incorporated into all Dolphin terminals that prevents overcharging. This means that Dolphin terminals may be stored in the ChargeBase indefinitely without damage to the terminals, battery packs, or the ChargeBase.

1. Power the ChargeBase; see [Supplying Power to the ChargeBase](#) on page 12-3.
2. Insert a terminal into a terminal well; see [Inserting and Removing Terminals](#) on page 12-4.
3. The Charge LED lights green to indicate that the terminal is powered and charging.

---

## ***Mounting the ChargeBase***


The Dolphin ChargeBase should be placed on a dry, stable surface. To easily adapt the ChargeBase to your environment, it can be mounted on a flat, horizontal surface such as a desktop or workbench, or a flat, vertical surface such as a wall.

When choosing a location, always bear in mind that

- The mounting location must allow users easy access to the power connector.
- The ChargeBase should be oriented so that users can easily read the labels.

### ***Bottom Panel***


The bottom panel of the Dolphin 9500/9550 ChargeBase offers two mounting options: insert a DIN Rail in the available slot for desk mounting or secure two mounting brackets with the available screw slots.

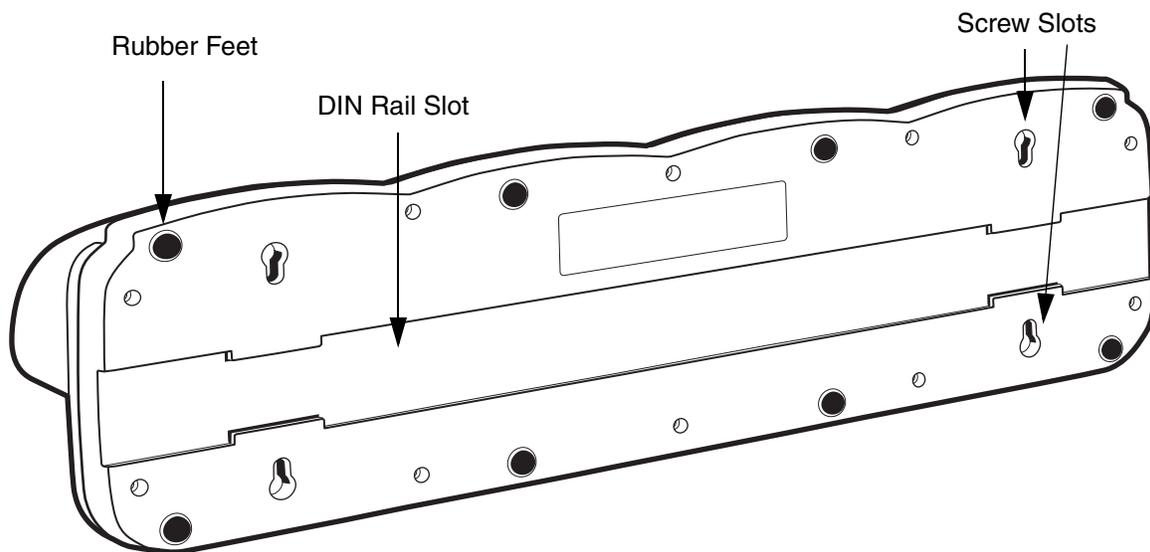


### ***Using the DIN Rail***

All Dolphin charging/communication cradles have a DIN rail (7.5 X 35 mm) slot on the bottom panel to enable secure mounting.

1. Slide the DIN Rail into the DIN Rail slot on the bottom panel.

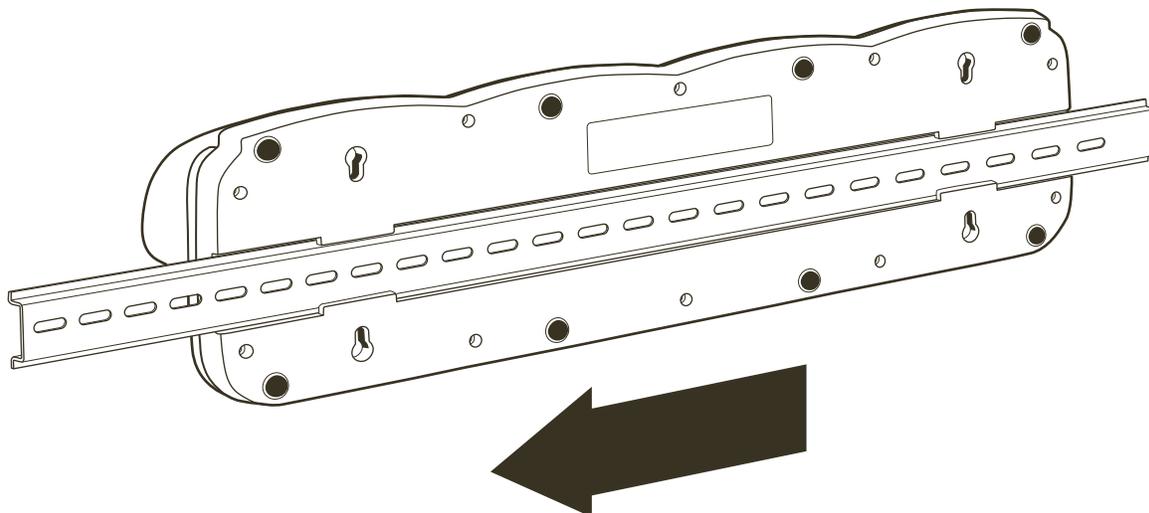

- 
2. Turn the ChargeBase and DIN Rail right side up.
  3. Secure the DIN Rail to a stable, flat horizontal surface.

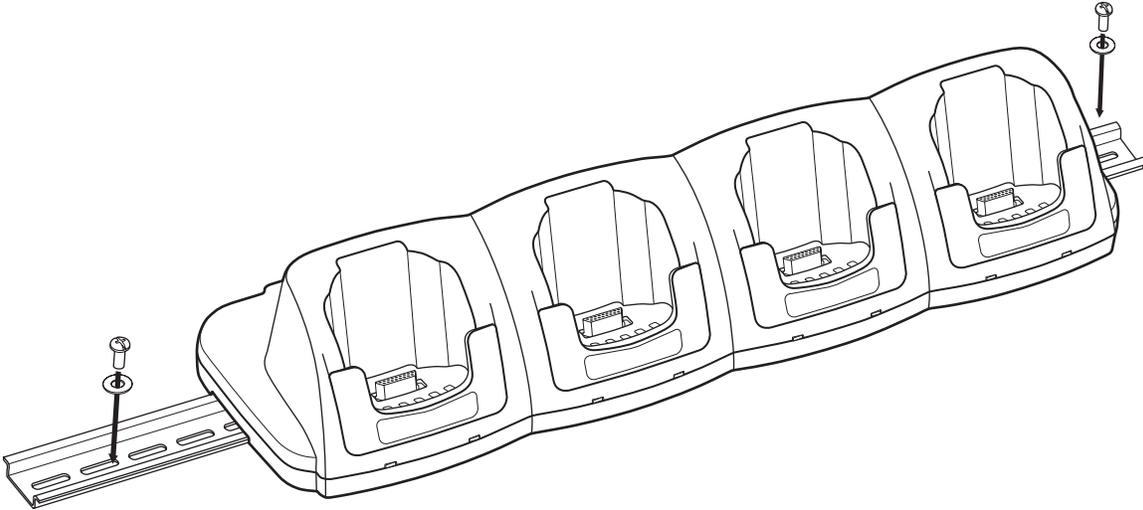

---

## Using the Mounting Brackets


A wall mount kit can be purchased separately. It contains two mounting brackets to secure both ends of the ChargeBase.

Use the screws and the mounting brackets to mount the ChargeBase to a wall or other vertical surface. Each mounting bracket contains an open slot in the back to accommodate the connector cables.




The bottom panel of the ChargeBase contains rubber feet that hold it steady on a flat surface. Those rubber feet need to be removed prior to applying the mounting brackets to the bottom panel. Pliers are recommended.

1. Secure the screws into the four screw slots on the bottom panel. Insert the heads into the round end and slide towards the narrow end until the screw is secure.

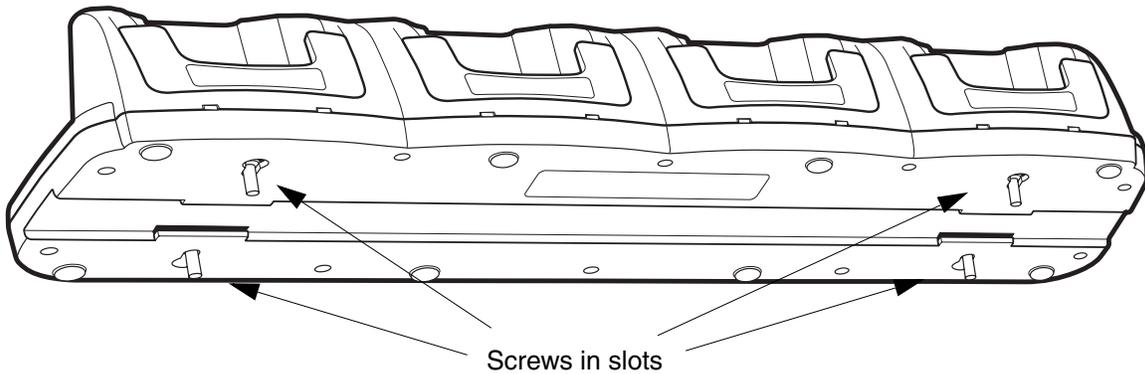


2. Attach the bottom panel to the two mounting brackets.

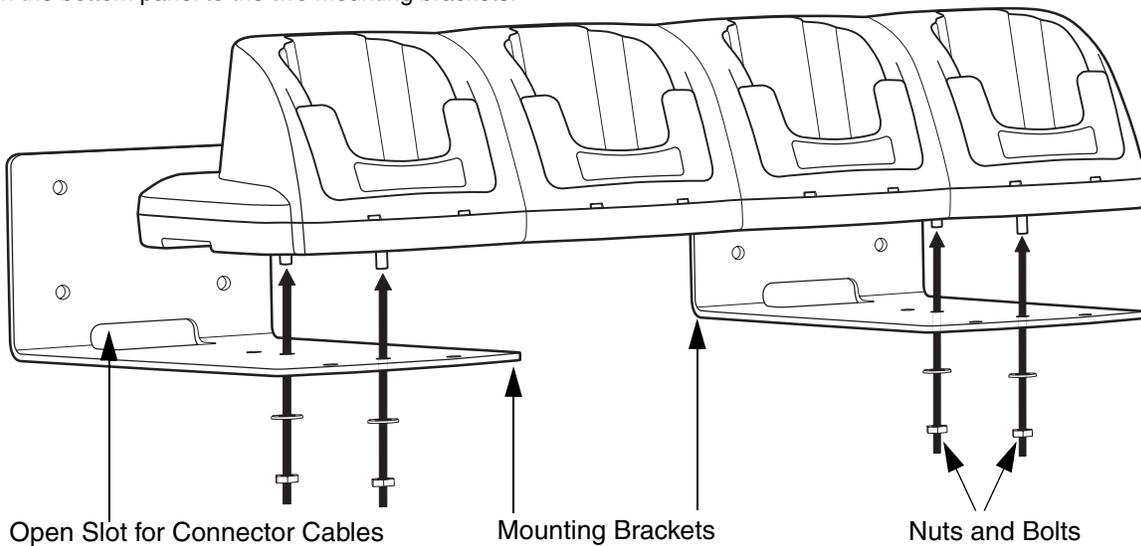

---

3. Using the nuts and bolts, secure the mounting brackets to the bottom panel.

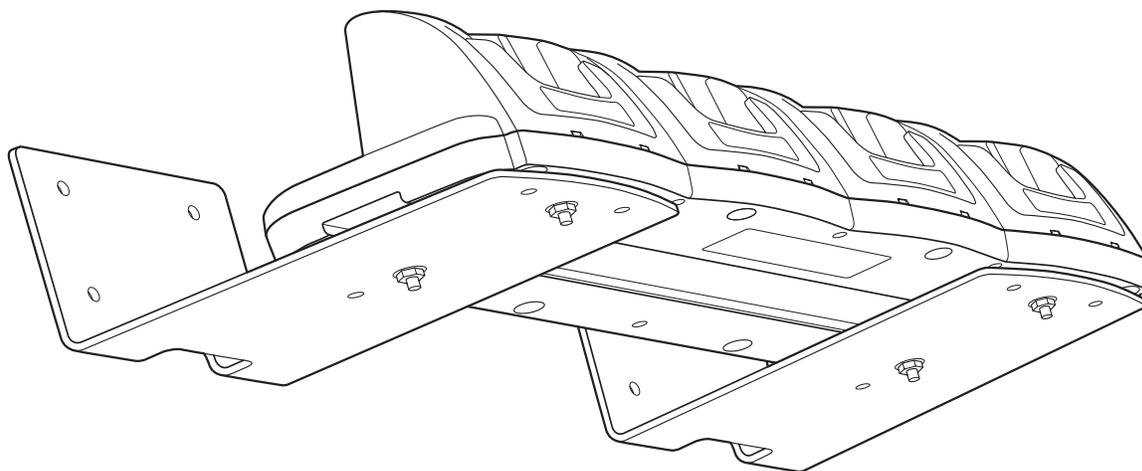

4. Secure the mounting brackets to an appropriate horizontal surface.



## Dolphin 9500/9550 QuadCharger

### Overview

The Dolphin QuadCharger is a four-slot charging station that provides intelligent battery management for Dolphin 9500/9550 battery packs. It can charge each battery in less than four hours. The fourth slot features a battery analyzer that completely resets and re-calibrates a battery and displays its resulting capacity.

### Compatibility

The QuadCharger is compatible with the Li-ion batteries that power the Dolphin 9500 series of mobile computing devices.

### Charging Process

Each charging slot works independently of the other three.

As battery packs charge, the charging circuitry follows the two-step charging process (CC-CV) that is recommended for Li-Ion batteries. The process monitors changes in temperature, current, and voltage. The charger also resets and calibrates battery pack data to accurately show battery status on the Dolphin display.




*Use only Dolphin 9500 series peripherals, power cables, and power adapters. Use of peripherals, cables, or power adapters not sold/manufactured by HHP will void the warranty and may damage the terminal.*



*Use only the Li-ion battery packs provided by HHP. The use of any battery pack not sold/manufactured by HHP in the Dolphin 9500/9550 terminal will void your warranty and may result in damage to the Dolphin terminal or battery.*

### Dolphin QuadCharger Parts and Functions

#### Front Panel

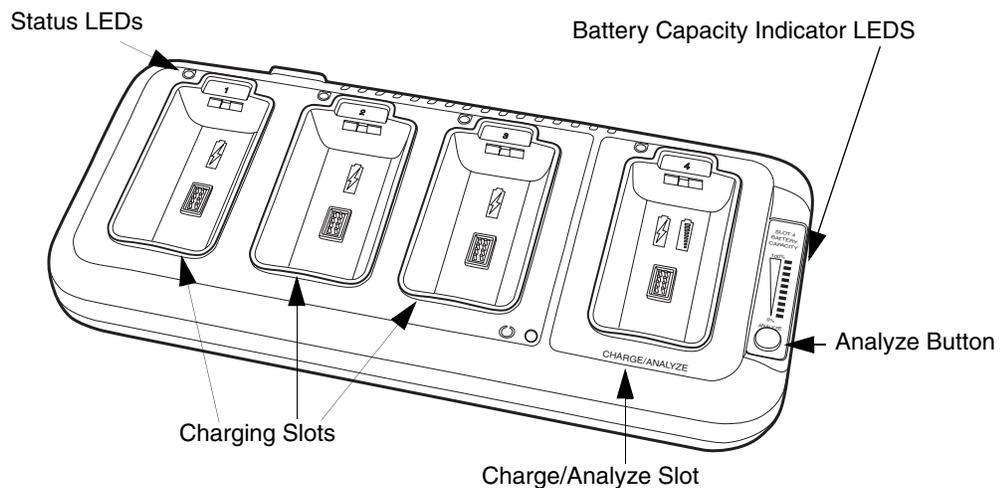

#### Charging Slots

The QuadCharger contains four charging slots. Each holds one Dolphin 9500/9550 battery. When a battery is placed in each slot, it immediately begins charging.

---

## Charge/Analyze Slot

This is the fourth slot and the only one that can be used to analyze a battery. When a battery is placed in this slot, it begins charging just as it does in the other three slots. However, if you press the ANALYZE button, it runs the battery in this slot through the complete Analyze cycle. For more information, see [Using the Battery Analyzer](#) on page 13-4.

## Battery Capacity Indicator LEDs

These LEDs give a readout of the remaining battery capacity after it has run through a complete analyze cycle. For more information, see [Battery Capacity Indicator LEDs](#) on page 13-2.

## Analyze Button


Press this button to start a battery analyze cycle. For more information, see [Using the Battery Analyzer](#) on page 13-4.

## Status LEDs

A status LED is located above each of the four battery slots. The color of the LED indicates the charge status of the batteries in its slot.

Status LED color	This color indicates that the battery in the slot...
Green	Has completed its charge cycle and is ready for use.
Orange	Is being charged at a maximum charge rate.
Red	Encountered an error during the most recent charge cycle.

## Rear Panel

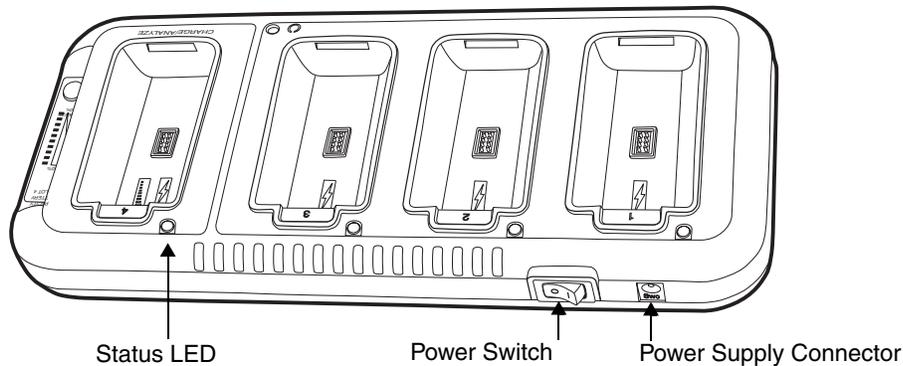

## Power Switch

Toggle the power switch to turn the QuadCharger on and off.

## Power Supply Connector

Use this connector to attach the power supply to the QuadCharger. The universal power supply accepts input voltages between 90-265 volts.

---

## ***Supplying Power to the QuadCharger***

The QuadCharger must be connected to a power source via the HHP power adapter cable so that voltage is adjusted appropriately.

1. Locate the AC power adapter cable and plug it into the power source.
2. Connect the power cable to the power adapter.
3. Connect the power cable to the supply connector on the back of the QuadCharger.
4. Press the power switch to the ON position.  
The power LED illuminates green, and the charger performs a self-diagnostic test that lasts approximately five seconds.

## ***Inserting and Removing Battery Packs***

### **Inserting**

To insert a battery pack, place the end of the battery without the locking tab into the bottom of the charging pocket and snap the battery into place with a hinging motion. The Status LED for that particular slot illuminates orange when the battery has been properly inserted.

### **Removing**

To remove a battery pack, push the locking tab down and pull the battery out from the charging slot with a hinging motion.

## ***Storing Batteries***

### **Recommendations**

To maintain top performance from batteries, follow these storage guidelines:

- Avoid storing batteries outside of the specified temperature range of -4 to 104° F (-20 to 40°C) or in extremely high humidity.
- For prolonged storage, do not keep batteries stored in a charger that is connected to a power source.

## ***Charging Batteries in the QuadCharger***

For best results, battery packs should be at room temperature before recharging them; temperature has a marked effect on charging. The recommended temperature range is 50° to 95° F (10° to 35° C).

Complete these steps:

1. Set up the QuadCharger.
2. Supply the QuadCharger with power and turn the power switch on.
3. Insert batteries into the appropriate slots. The Status LED for each slot turns orange to indicate that the battery has begun a charge cycle.
4. When the Status LED turns green, the battery in the slot has completed charging.

---

## Using the Battery Analyzer



### Location

The battery analyzer is located in the fourth slot of the ChargeBase. Only batteries in this slot can be analyzed.

### Analyze Cycle

The Analyze cycle is initiated when a battery is placed in the Charge/Analyze slot and the ANALYZE button is pressed. In an Analyze cycle, batteries are completely discharged, then recharged to capacity, as well as completely reset and re-calibrated.

The length of time it takes for a battery to complete the Analyze cycle varies depends on initial state of the battery's charge. Minimum time is 8 hours, maximum time is 12 hours.

### Battery Capacity Indicator LEDs

The Battery Capacity Indicator LEDs are located along the right side of the Charge/Analyze slot. These LEDs display the capacity of the battery at the end of the Analyze cycle. Battery capacity is displayed as a percentage of measured capacity/rated capacity. Each LED equates to 10% battery capacity.

### Purpose

Using the Charge/Analyze slot helps you monitor the charge capacity of Li-ion batteries over time. The LEDs in this slot provides a readout of the battery's capacity after a complete discharge and full charge. They tell you the maximum charge level the battery can hold.

### Status LED

The Charge/Analyze slot also contains a standard status LED in the upper, left corner of the slot. When this slot is used for regular charging, this LED operates in the usual manner; see [Status LEDs](#) on page 13-2.

When this slot is being used to analyze a battery, the status LED functions as follows:

Status LED color	Indicates that the battery in the slot...
Solid Green	Has completed the Analyze cycle.
Flashing Orange	Is being analyzed.
Solid Red	Encountered an error during the Analyze cycle.

### To Analyze a Battery

Complete these steps:

1. Insert the battery into the Charge/Analyze slot (the fourth).
2. Press the ANALYZE button. The Status LED flashes orange to indicate that the analyzing cycle has begun.
3. Upon completion of the Analyze cycle, the Status LED lights solid green, and the Battery Capacity Indicator LEDs display the battery's capacity.



*The Dolphin QuadCharger is accumulating battery pack information during the entire Analyze cycle. Do NOT remove the battery until the cycle has been completed.*

---

## ***Mounting the QuadCharger***

The Dolphin QuadCharger should be on a dry, stable surface. To easily adapt the QuadCharger to your environment, it can be mounted on a flat, horizontal surface such as a desktop or workbench, or a flat, vertical surface such as a wall.

When choosing a location, always bear in mind that


- the mounting location must allow users easy access to power switch and power connector.
- the QuadCharger should be oriented so that users can easily insert and remove battery packs and read the labels, especially for the Battery Analyzer.

### **Mounting with the DIN Rail**

All Dolphin charging/communication cradles have a DIN rail (7.5 X 35 mm) slot on the bottom panel to enable secure mounting. To mount the QuadCharger, you slide the DIN rail slot along the bottom panel and secure it. Then, using the appropriate nuts and bolts, secure the DIN rail to the desk or wall.

### ***Desk Mounting***


The following graphic displays how to mount the QuadCharger to a desk:

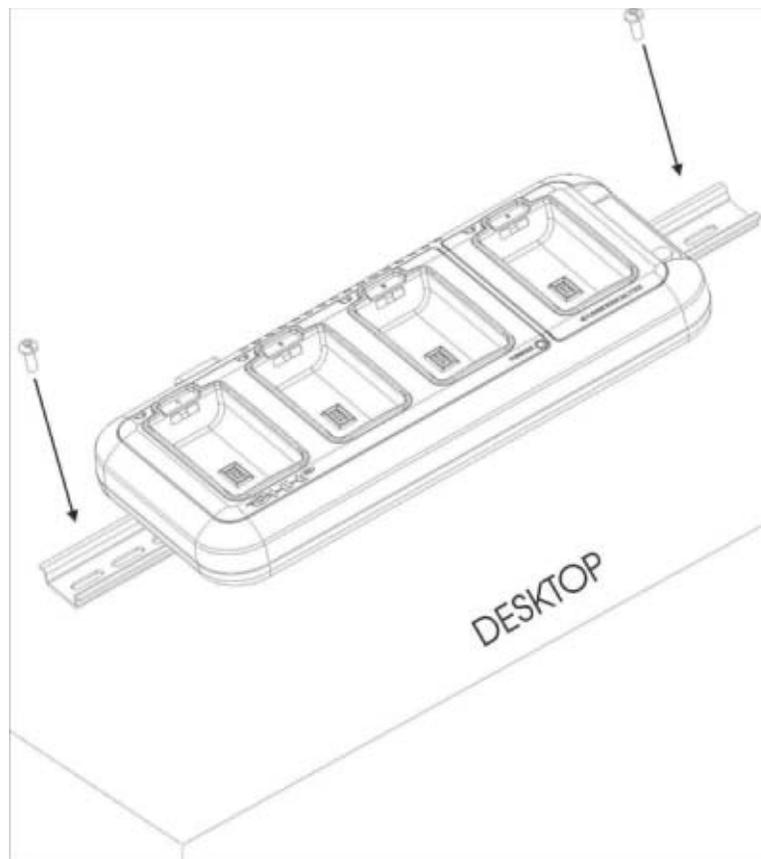

---

## Wall Mounting

The following graphic displays how mount a QuadCharger to a wall:

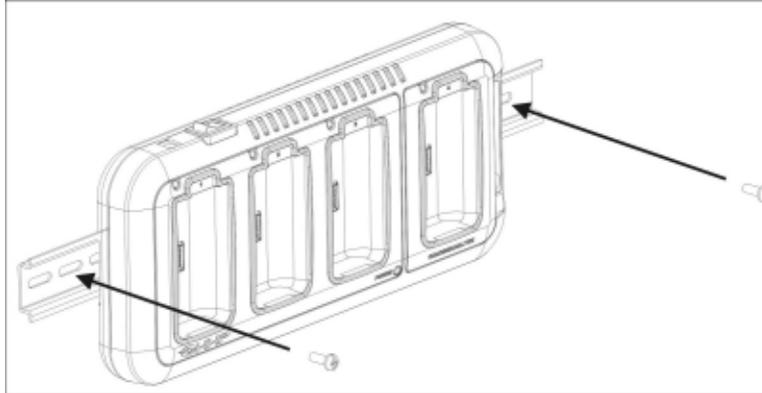

## Troubleshooting

If you encounter problems with your Dolphin QuadCharger, refer to chart below for possible solutions. If problems persist, please contact HHP Technical Support.

Problem	Issue
The Status LED does not come on when I insert a battery pack into the Dolphin QuadCharger	Check the power connections on the Dolphin QuadCharger; make sure the POWER switch is ON and the battery pack is properly seated.
The Status LED lights red during charging.	Try to charge the battery in one of the other charging slots. If the red Status LED comes on again, then the problem is associated with the battery pack. If the red status stays with the charging slot, the problem is associated with the charging circuitry.
The Status LED lights red and stays on without a battery in the charging slot.	An error occurred during the self-diagnostic test for that particular charging pocket. Call HHP Product Service and request an RMA. For additional warranty and return information, see <a href="#">Warranty, Support, and Service</a> on page 14-1.

## Warranty, Support, and Service

### Limited Warranty

Hand Held Products, Inc., d/b/a HHP (“HHP”) warrants its products to be free from defects in materials and workmanship and to conform to HHP’s published specifications applicable to the products purchased at the time of shipment. This warranty does not cover any HHP product which is (i) improperly installed or used; (ii) damaged by accident or negligence, including failure to follow the proper maintenance, service, and cleaning schedule; or (iii) damaged as a result of (A) modification or alteration by the purchaser or other party, (B) excessive voltage or current supplied to or drawn from the interface connections, (C) static electricity or electro-static discharge, (D) operation under conditions beyond the specified operating parameters, or (E) repair or service of the product by anyone other than HHP or its authorized representatives.

This warranty shall extend from the time of shipment for the duration published by HHP for the product at the time of purchase (“Warranty Period”). Any defective product must be returned (at purchaser’s expense) during the Warranty Period to HHP’s factory or authorized service center for inspection. No product will be accepted by HHP without a Return Materials Authorization, which may be obtained by contacting HHP. In the event that the product is returned to HHP or its authorized service center within the Warranty Period and HHP determines to its satisfaction that the product is defective due to defects in materials or workmanship, HHP, at its sole option, will either repair or replace the product without charge, except for return shipping to HHP.

EXCEPT AS MAY BE OTHERWISE PROVIDED BY APPLICABLE LAW, THE FOREGOING WARRANTY IS IN LIEU OF ALL OTHER COVENANTS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, ORAL OR WRITTEN, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

HHP’S RESPONSIBILITY AND PURCHASER’S EXCLUSIVE REMEDY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT. IN NO EVENT SHALL HHP BE LIABLE FOR INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, AND, IN NO EVENT, SHALL ANY LIABILITY OF HHP ARISING IN CONNECTION WITH ANY PRODUCT SOLD HEREUNDER (WHETHER SUCH LIABILITY ARISES FROM A CLAIM BASED ON CONTRACT, WARRANTY, TORT, OR OTHERWISE) EXCEED THE ACTUAL AMOUNT PAID TO HHP FOR THE PRODUCT. THESE LIMITATIONS ON LIABILITY SHALL REMAIN IN FULL FORCE AND EFFECT EVEN WHEN HHP MAY HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH INJURIES, LOSSES, OR DAMAGES. SOME STATES, PROVINCES, OR COUNTRIES DO NOT ALLOW THE EXCLUSION OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

All provisions of this Limited Warranty are separate and severable, which means that if any provision is held invalid and unenforceable, such determination shall not affect the validity of enforceability of the other provisions hereof.

The limited duration of the warranty for the Dolphin 9500 and Dolphin 9550 terminals is as described below:

- Terminals with an integrated imager are covered by a two-year limited warranty.
- Touch screens are covered by a one-year limited warranty.
- The limited duration of the warranty for the Dolphin HomeBase, Mobile Base, Mobile Charger, and QuadCharger is one year.
- The limited duration of the warranty for batteries is one year. Use of any battery not sold/manufactured by HHP may damage the terminal and/or the battery and will void the warranty. Batteries returned to HHP in a reduced state may or may not be replaced under this warranty. Battery life will be greatly increased when following the battery instructions in this user’s guide.
- Use of any peripheral with the Dolphin terminal not manufactured/sold by HHP will void the warranty. This includes but is not limited to: cables, power supplies, cradles, and docking stations.
- Use only power adapters approved for use by HHP. Failure to do so may result in improper operation or damage to the unit and will void the warranty.

Hand Held Products, Inc. extends these warranties only to the first end-users of the products. These warranties are non-transferable.

### How to Extend Your Warranty

HHP offers a variety of service plans on our hardware products. These agreements offer continued coverage for your equipment after the initial warranty expires. For more information, contact your HHP sales representative, customer account representative, the Product Service Marketing Manager, or your Authorized Reseller.

---

## ***Return Information***

Should your unit or any of the peripherals prove to be defective within the stated warranty period from the date of purchase, return the product, as described in the Repair Maintenance Authorization (RMA) procedures below, and we will, at our option, repair or replace the product, to whatever extent HHP deems necessary to restore the product to proper operating condition, without any charge to you.

You **must** obtain an RMA number to receive service from any of HHP's repair facilities. Failure to obtain an RMA number before shipping your product to this repair facility can delay the processing of your repair request. Please contact the Product Service facility (numbers listed below) nearest you to receive an RMA number.

If you purchased the product from an Authorized HHP Reseller, contact the Reseller with the unit's serial number. Your Reseller will contact HHP, on your behalf, to arrange for the unit to be serviced.

## ***Calling for an RMA Number***

If you purchased the product directly from HHP, or have been instructed by your Reseller to contact HHP directly, call the Product Service Department in your area to request an RMA number.

You can also access product service and repair online at : <http://www.hhp.com/hhp/service/contactservice.tpl>.

## **Requirements**

When calling for service at any of our repair facilities, please be prepared to give the following information:

- Product type and serial number
- Brief description of problem
- Dated proof-of-purchase

If your equipment is still covered under the initial end-user's product warranty, please notify the Product Services Representative when you call.

## ***Service and Repair Locations.***

### **North America/Canada**

HHP Corporate Offices  
Telephone: (800) 782-4263, option 3  
Fax: (704) 566-6015  
E-mail: ProductService@hhp.com

### **Latin America**

HHP Latin America  
Telephone: +1 239-263-7600  
Fax: +1 239-263-9689  
E-mail: LASupport@hhp.com

### **Asia Pacific**

HHP Asia/Pacific  
Telephone: +852-2511-3050  
Fax: +852-2511-3557  
E-mail: chuie@hhp.com

### **Europe, Middle East, and Africa (EMEA)**

HHP Europe  
Telephone: +31 (0) 40 29 01 633  
Fax: +31 (0) 40 2901631  
E-mail: EuroService@hhp.com

### **Brazil**

HHP Brazil  
Telephone: +55 (21) 2494-7060  
Fax: +55 (21) 2494-5033  
E-mail: suporte@hhp.com.br

### **Japan**

HHP Japan  
Telephone: +813 5842 6325  
Fax: +813 5842 6335  
E-mail: KobayashiT@hhp.com

## ***Shipping***

Please make note of the RMA number (if required) and the product's serial number before shipping.

If you must return your unit, place the product in its original packaging with a copy of your original invoice (this helps avoid possible service delays) and ship the product prepaid to the appropriate address below. For your protection, we recommend you insure any equipment being sent to HHP.

**Write the RMA number on the mailing label under the address.\**

## ***Repair***

After repair or replacement of the equipment, HHP will ship the product, at our cost, to your location. Non-warranty repairs will be returned, at the customer's expense, unless otherwise requested. Units currently under a service agreement will be shipped per the service agreement.

---

## ***Technical Assistance***

If you have a question or problem with your unit, you can obtain technical assistance from HHP's Application Support department.

### **North America/Canada:**

Telephone: (800) 782-4263, Option 4 (8 a.m. to 6 p.m. EST)  
Fax number: (315) 685-4960  
E-mail: support@HHP.com

### **Europe, Middle East, and Africa:**

Telephone  
European Ofc: +31 (0) 40 29 01 600  
U.K. Ofc: +44 1925 240055  
E-mail: euro\_support@HHP.com

### **Asia:**

Telephone: +852-2511-3050  
E-mail: asia\_support@HHP.com

### **Latin America:**

Telephone: (239) 263-7600  
E-mail: la\_support@HHP.com

## ***Assistance Online***

You can also access technical assistance online at: <http://www.hhp.com/hhp/service/contacttech.tpl>.





## Appendix A - Keyboards

### Overview

This appendix provides useful tools for programming and managing your Dolphin 9500/9550 terminal.


### General Windows Keyboard Shortcuts

Use the keyboard shortcuts in the chart below to navigate the Dolphin 9500 and Dolphin 9550 terminal keyboards. These are standard keyboard shortcuts for Windows applications.

Press these keys,	To...
CTRL + C	Copy
CTRL + X	Cut
CTRL + V	Paste
CTRL + Z	Undo
DELETE	Delete
CTRL + RIGHT ARROW	Move the insertion point to the beginning of the next word.
CTRL + LEFT ARROW	Move the insertion point to the beginning of the previous word.
CTRL + DOWN ARROW	Move the insertion point to the beginning of the next paragraph.
CTRL + UP ARROW	Move the insertion point to the beginning of the previous paragraph.
SHIFT with any of the arrow keys	Select more than one item in a window or on the desktop, or select text within a document.
CTRL+ A	Select all.
ALT + ENTER	View properties for the selected item.
ALT + TAB	Switch between open items.
ALT + ESC	Cycle through items in the order they were opened.
ALT + Tap on Touch screen	Right-click
CTRL + ESC	Display the <b>Start</b> menu.
ALT + Underlined letter in a menu name	Display the corresponding menu.
Underlined letter in a command name on an open menu	Carry out the corresponding command.
BACKSPACE	View the folder one level up in My Computer or Windows Explorer.
ESC	Cancel the current task.

---

## 43-Key Alpha/Numeric Keyboard

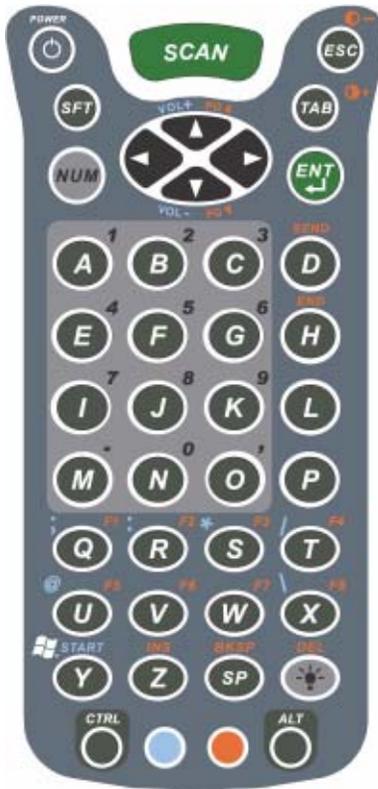

### Blue Key Functions and Characters

The following table displays the special functions performed and characters inserted using the blue key.

Key Combination	Function/Special Character
Blue key + D	- (minus)
Blue key + H	_ (underscore)
Blue key + L	=
Blue key + P	+
Blue key + Q	;
Blue key + R	:
Blue key + S	*
Blue key + T	/
Blue key + U	@
Blue key + X	\
Blue key + Y	START

---

## ***Red Key Functions and Characters***

The following table displays the special functions performed and characters inserted using the red key.

<b>Key Combination</b>	<b>Function/Special Character</b>
Red key + ESC	Lightens Contrast*
Red key + TAB	Darkens Contrast*
Red key + SFT	Toggles on Caps Lock
Red key + Q	F1
Red key + R	F2
Red key + S	F3
Red key + T	F4
Red key + U	F5
Red key + V	F6
Red key + W	F7
Red key + X	F8
Red key + Z	INS (insert)
Red key + SP	BKSP (backspace)
Red key + BACKLIGHT KEY	DEL (delete)

\* Exit the mouse utility prior to adjusting the contrast.

## ***Key Combinations***

Use the key combinations listed below to access certain keyboard functions or to use special characters that are not defined on the 43-key version of the Dolphin 9500/9550 keyboard.

<b>Key/Key Combination</b>	<b>Function/Special Character</b>
NUM + SFT + A	!
NUM + SFT + B	@
NUM + SFT + C	#
NUM + SFT + E	\$
NUM + SFT + F	%
NUM + SFT + G	^
NUM + SFT + I	&
NUM + SFT + J	*
NUM + SFT + K	(
NUM + SFT + M	>
NUM + SFT + N	)
NUM + SFT + O	<

---

### Key Combinations Using Blue + Sft Keys

Key/Key Combinations	Function/Special Characters
SFT + Blue + T	?
SFT + Blue + X	>

### Miscellaneous Key Combinations

Key/Key Combinations	Function/Special Characters
NUM + ALT + 3 + 9	'
NUM + ALT + 3 + 4	"

**35-Key Numeric/Alpha Keyboard**



**Blue Key Functions and Characters**

Key Combination	Function/Special Character
Blue key + .	+
Blue key + ,	-
Blue key + F1	;
Blue key + F2	:
Blue key + F3	/
Blue key + F4	\
Blue key + SP	+
Blue key + DEL	-

---

## Key Combinations

Use the key combinations listed below to access certain keyboard functions or to use special characters that are not defined on the 35-key version of the Dolphin keyboard.


### Key Combinations Using Alpha + SFT Keys

Key/Key Combination	Function/Special Character
ALPHA + SFT + 1	!
ALPHA + SFT + 2	@
ALPHA + SFT + 3	#
ALPHA + SFT + 4	\$
ALPHA + SFT + 5	%
ALPHA + SFT + 6	^
ALPHA + SFT + 7	&
ALPHA + SFT + 8	*
ALPHA + SFT + 9	(
ALPHA + SFT + 0	)

### ALT Key Combinations

Key/Key Combinations	Function/Special Characters
Hold the ALT key down as you type in the numbers.	
ALT + 3 + 9	'
ALT + 3 + 4	"

## 56-Key Full Alpha/Numeric

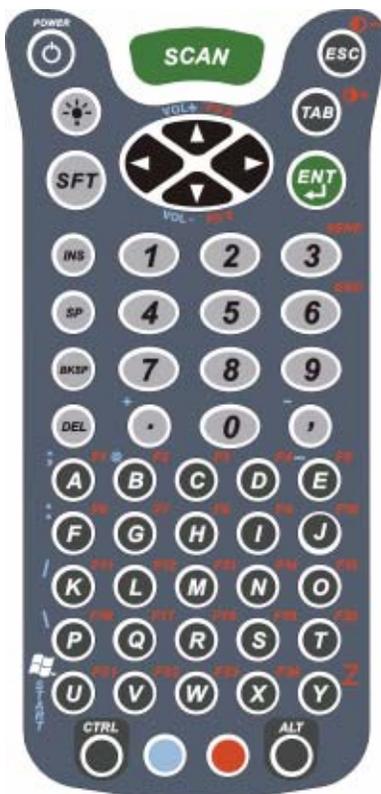

### Blue Key Functions and Characters

Key Combination	Function/Special Character
Blue key + .	+
Blue key + ,	-
Blue key + A	;
Blue key + B	@
Blue key + E	—
Blue key + F	:

### Red Key Functions and Characters

Key Combination	Function/Special Character
Red key + ESC	Lightens Contrast*
Red key + TAB	Darkens Contrast*
Red key + SFT	Toggles on Caps Lock
Red key + A	F1
Red key + B	F2
Red key + C	F3
Red key + D	F4

---

<b>Key Combination</b>	<b>Function/Special Character</b>
Red key + E	F5
Red key + F	F6
Red key + G	F7
Red key + H	F8
Red key + I	F9
Red key + J	F10
Red key + K	F11
Red key + L	F12
Red key + M	F13
Red key + N	F14
Red key + O	F15
Red key + P	F16
Red key + Q	F17
Red key + R	F18
Red key + S	F19
Red key + T	F20
Red key + U	F21
Red key + V	F22
Red key + W	F23
Red key + X	F24
Red key + Y	Z

\* Exit the mouse utility prior to adjusting the contrast.

---

## Key Combinations

Use the key combinations listed below to access certain keyboard functions or to use special characters that are not defined on the 56-key version of the Dolphin keyboard.

### SFT Key Combinations

Key Combination	Function/Special Character
SFT + 1	!
SFT + 2	@
SFT + 3	#
SFT + 4	\$
SFT + 5	%
SFT + 6	^
SFT + 7	&
SFT + 8	*
SFT + 9	(
SFT + 0	)
SFT + . (period)	>
SFT + , (comma)	<

### ALT Key Combinations

Key Combinations	Function/Special Characters
Hold the ALT key down as you type in the numbers.	
ALT + 3 + 9	'
ALT + 3 + 4	"

---

## *Com Port Assignment Table*

<b>Com Port</b>	<b>Assignment</b>
Com Port 1	Serial port. This is the 17-pin connector on the bottom panel of Dolphin 9500/9550 terminals.
Com Port 2	Bluetooth Module  If there is no Bluetooth hardware installed on the terminal, this com port is unassigned.
Com Port 3	Raw Infrared
Com Port 4	
Com Port 5	USB virtual serial port
Com Port 6	IrDA, if IrDA is enabled.  If IrDA is disabled, this com port becomes available. See <a href="#">To Disable the IrDA Port</a> on page 5-7.
Com Ports 7-9	Unassigned.  These are available for selection only when connecting to devices that use virtual com ports, such as Bluetooth.





Upgrade your image.

700 Visions Drive  
P.O. Box 208  
Skaneateles Falls, NY 13153-0208