


Wrap-Around Tap Lock Instructions

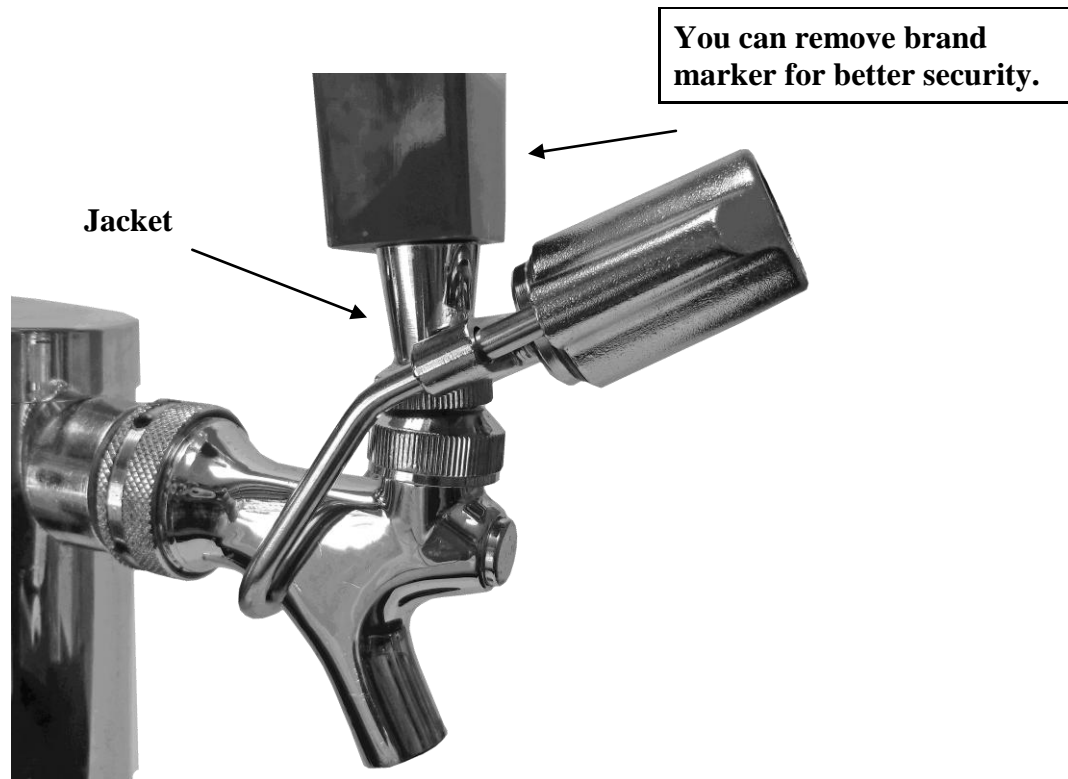


STANDARD FAUCET LOCKING INSTRUCTIONS

1. Slip lock under faucet as shown.
2. Turn key clockwise until it is firmly seated against the jacket.
DO NOT OVERTIGHTEN. KEY MAY BREAK OFF IN LOCK.
3. Remove the key only in the horizontal or vertical position.
4. (Optional) Remove brand marker (handle) for better security.
5. Reverse procedure to remove lock.

AlcoholControls.com
800.285-2337

Instructions for tapered beer faucet on page 2

Wrap-Around Tap Lock Instructions

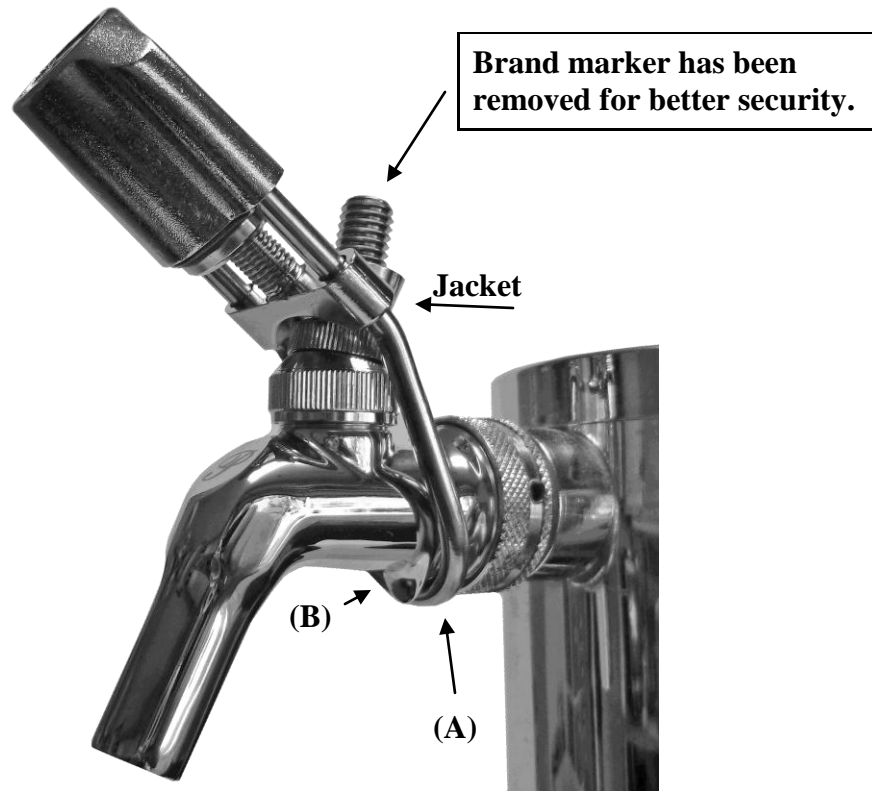

TAPERED FAUCET LOCKING INSTRUCTIONS

1. Slip lock under faucet as shown making sure that the loop part of the lock (A) goes behind the protruding fin (B) of the tapered faucet.
2. Raise the lock upward and then turn key clockwise until it is firmly seated against the jacket.
DO NOT OVERTIGHTEN. KEY MAY BREAK OFF IN LOCK.
3. Remove the key only in the horizontal or vertical position.
4. (Optional - as pictured) Remove brand marker (handle) for better security.
5. Reverse procedure to remove lock.

AlcoholControls.com
800.285-2337

Instructions for standard beer faucet on page 1