


EVAPOWAY ANTI-CONDENSATE PANS



120 V Anti-Condensate Pan

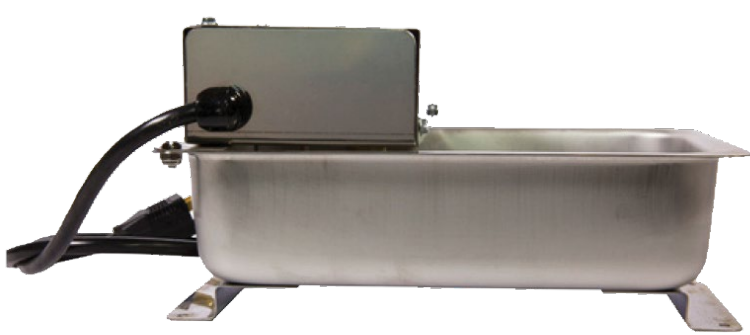

208, 240 V Anti-Condensate Pan



120 V Anti-Condensate Pan

Evapoway anti-condensate pans are used by leading companies in Commercial Refrigeration, HVAC, and Vertical Transportation (elevators).

These durable and reliable products use the highest quality components (including NSF certified pans) to evaporate, defrost, and condensate where no drain line is available.

Made of high quality stainless steel, our electric condensate evaporators can dissipate up to 24 gallons (90.8 l) of condensation water per day. All units have successfully passed rigorous testing and are UL recognized in the USA and Canada. Evapoway units are manufactured in a variety of sizes and capacities to meet any application.

The Evapoway condensate evaporator is available in a variety of configurations to meet your system's exact requirements.

BENEFITS

- Positive evaporation
- Independent of ambient conditions
- Space-saving design
- Wide variety of sizes to accommodate different capacities and voltages
- High limit safety and float switch operation

APPLICATIONS

- Commercial refrigeration units
- Elevators
- HVAC units

EVAPOWAY ANTI-CONDENSATE PANS

SPECIFICATIONS

Pan Construction: Corrosion resistant 22 gauge stainless steel

Pan Size: Wide range of choices

Available Voltages: 120, 208, 240 VAC

Wattage Options: 200 to 3000 W

Dissipation Rate Options: 1.5 to 24 gallons per day (5.7 to 90.8 liters per day)

Power Cord: 36 in (0.9 m) long

- 120 VAC includes standard 3-prong plug (NEMA 5-15)

- 208 and 240 VAC has bare wire leads

- Other lengths and terminations available upon request



ORDERING INFORMATION

PAN SIZE L x W x H in (mm)	CAPACITY qt (l)	WATTS	VOLTS	AMPS	DISSIPATION RATE gal (l) per day	PART NO.
10 x 7 x 2.5 (254 x 178 x 64)	1.75 (1.7)	200	120	1.67	1.5 (5.7)	DM02T-1S
		400	120	3.33	3.5 (13.2)	DM04T-1S
		400	208	1.92	3.5 (13.2)	DM04T-2S
		400	240	1.66	3.5 (13.2)	DM04T-3S
21 x 13 x 2.5 (533 x 178 x 64)	7 (6.6)	500	120	4.17	5 (18.9)	DM05WW-1S
13 x 7 x 2.5 (330 x 178 x 64)	2.37 (2.2)	600	120	5.00	4.5 (17)	DM06S-1S
13 x 7 x 4 (330 x 178 x 102)	4 (3.8)	600	120	5	4.5 (17)	DM06M-1S
		750	120	6.25	5.5 (20.8)	DM07M-1S
		750	208	3.61	5.5 (20.8)	DM07M-2S
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	750	120	6.25	5.5 (20.8)	DM07W-1S
13 x 7 x 2.5 (330 x 178 x 64)	2.37 (2.2)	800	120	6.67	6 (22.7)	DM08S-1S
		800	208	3.85	6 (22.7)	DM08S-2S
		800	240	3.33	6 (22.7)	DM08S-3S
13 x 10 x 2.5 (330 x 254 x 64)	4.3 (4.1)	800	120	6.67	6 (22.7)	DM08WS-1S
		800	208	3.85	6 (22.7)	DM08WS-2S
		800	240	3.33	6 (22.7)	DM08WS-3S
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	800	120	6.67	6 (22.7)	DM08W-1S
13 x 10 x 4 (330 x 254 x 102)	4 (3.8)	900	120	3.85	7 (26.5)	DM09W-1S
13 x 7 x 4 (330 x 178 x 102)	4 (3.8)	1000	120	3.33	8 (30.3)	DM10M-1S
		1000	208	6.67	8 (30.3)	DM10M-2S
		1000	240	3.85	8 (30.3)	DM10M-3S
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	1000	120	3.33	8 (30.3)	DM10W-1S
		1000	208	6.67	8 (30.3)	DM10W-2S
		1000	240	7.50	8 (30.3)	DM10W-3S
		1500	240	12.5	12 (45.4)	DM15W-1S
		1500	208	7.21	12 (45.4)	DM15W-2S
		1500	240	6.25	12 (45.4)	DM15W-3S
13 x 10 x 4 (330 x 254 x 102)	10 (9.5)	1500	240	6.25	12 (45.4)	DM15X-3S
21 x 6 x 6 (533 x 152 x 152)	9 (8.5)	1500	208	7.21	12 (45.4)	DM15XY-2S
		1500	240	6.25	12 (45.4)	DM15XY-3S
21 x 13 x 6 (533 x 330 x 152)	21 (19.9)	1500	240	6.25	12 (45.4)	DM15XX-3S
10 3/8 x 8 3/8 x 4 (263 x 222 x 101)	2.4 (2.2)	600	120	5	4.5 (17)	DM060Q-1S
13 x 7 x 4 (330 x 178 x 102)	4 (3.8)	400	120	3.33	4 (15.1)	DM04M-1S
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	600	120	5	4.5 (17)	DM06W-1S

EVAPOWAY ANTI-CONDENSATE PANS

ORDERING INFORMATION

PAN SIZE x W x H IN (MM)	CAPACITY QUARTS (LITERS)	WATTS	VOLTS	AMPS	DISSIPATION RATE GAL/DAY (L/DAY)	PART NO.
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	500	120	4.17	5 (18.9)	DM05W-1D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	500	120	4.17	5 (18.9)	DM05WW-1D
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	1000	120	8.33	8 (30.3)	DM10W-1D
		1000	208	4.81	8 (30.3)	DM10W-2D
		1000	240	4.17	8 (30.3)	DM10W-3D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	1000	120	8.33	8 (30.3)	DM10WW-1D
		1000	208	4.81	8 (30.3)	DM10WW-2D
		1000	240	4.17	8 (30.3)	DM10WW-3D
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	1200	120	10.00	10 (37.9)	DM12W-1D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	1200	120	10.00	10 (37.9)	DM12WW-1D
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	1500	120	12.5	12 (45.4)	DM15W-1D
		1500	208	7.21	12 (45.4)	DM015W-2D
		1500	240	6.25	12 (45.4)	DM15W-3D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	1500	120	12.5	12 (45.4)	DM15WW-1D
		1500	208	7.21	12 (45.4)	DM15WW-2D
		1500	240	6.25	12 (45.4)	DM15WW-3D
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	1800	120	15.00	14 (53)	DM18W-1D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	1800	120	15.00	14 (53)	DM18WW-1D
13 x 10 x 6 (330 x 254 x 152)	21 (19.9)	1800	120	15.00	14 (53)	DM18X-1D
21 x 13 x 6 (533 x 330 x 152)	21 (19.9)	1800	120	15.00	14 (53)	DM18XX-1D
13 x 10 x 4 (330 x 254 x 102)	7 (6.6)	2000	208	9.61	15 (56.8)	DM20W-2D
		2000	240	8.33	15 (56.8)	DM20W-3D
21 x 13 x 4 (533 x 330 x 102)	15 (14.2)	2000	208	9.62	15 (56.8)	DM20WW-2D
		2000	240	8.33	15 (56.8)	DM20WW-3D
		3000 (2 X 1500)	120	12.5	24 (90.8)	DM30WW-1S
		3000 (2 X 1500)	240	6.25	24 (90.8)	DM30WW-3S
21 x 13 x 6 (533 x 330 x 152)	21 (19.9)	3000 (2 X 1500)	208	7.21	24 (90.8)	DM30XX-2S
		3000 (2 X 1500)	240	6.25	24 (90.8)	DM30XX-3S

BriskHeat[®]

www.briskheat.com