



Starling Tab-Tension CLR® 5

Motorized Ceiling Light Rejecting Projection Screen

Product Description

The **Starling Tab-Tension CLR® 5** features an ultra-short throw front projection Ceiling Light Rejecting® (CLR®) surface in a sleek motorized modern design. Its tab-tension system ensures a flat and taut projection surface that produces exceptional, ripple-free images. The StarBright™ CLR® 5 (SBCLR™ 5) absorbs overhead light to prevent the washout effect commonly experienced with conventional matte white materials.



Product Design & Features

- Comes in a moisture resistant curved white aluminum case
- Ceiling light rejecting material absorbs up to 80% of overhead light
- Tab-tension design ensures a flat and taut projection surface that is ripple-free
- Pair of wall brackets included for flush wall/ceiling installation
- Eye-bolt screws included for suspended ceiling installation capable
- Plug & Play design with built-in low voltage control system


Control System

- Includes Radio Frequency (RF) and Infrared (IR) remote controls
- Includes wall box controller for manual on-wall operation
- User-friendly programmable vertical drop position
- Wall box controller is detachable for a clean look
- Built-in selectable channels allow one RF remote programming to control multiple screens
- 12v trigger feature allows the screen's operation to synchronize with the projector's power cycle
 - Wired 12v trigger capability via wall box controller
 - Wireless 12v trigger capability via RF remote control

Technical Data

Projection Type:	Front projection
Projector Compatibility:	Ultra-short Throw projectors ONLY
StarBright™ CLR® 5:	0.8 Gain
Viewing Angle:	170°
Light Absorption:	Up to 80%
Black Backing:	Yes
Material Type:	Retro-reflective
Motor Type:	Tubular Motor
Warranty:	2-Year / 3-Year ENR-G Warranty

Available Screen Materials

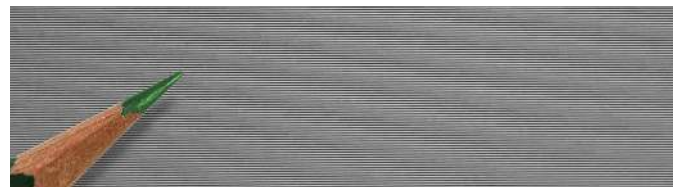

StarBright™ CLR 5