



E-MAXX and E-MAXX Brushless RPM Sensor Installation

Covers Part Number(s):
3977R, 3977A, 6537, 6522



Required:



- Gear Cover 3977R for E-Maxx Brushless Edition or 3977A for E-Maxx (if needed)
- Sensor Bracket (6537)
- RPM Sensor 6522

Tools Needed:

- 2.0mm hex wrench
- 2.5mm hex wrench

Installation Steps:

1. Using a 2.0mm hex wrench, remove wire cover and upper receiver box cover (A).
2. Using a 2.5mm hex wrench, remove the stock spur gear cover by removing the 3X8 CS screw (B).
3. Secure sensor into spur gear cover (3977R or 3977A if required) with bracket 6537 and secure sensor bracket with included 3X4 BCS screws (C).
4. Reinstall spur gear cover.
5. Route RPM sensor through wire cover and plug into RPM slot on receiver (D).
6. Reinstall wire cover and upper receiver box cover (add grease to foam pads on receiver box to ensure watertight seal).

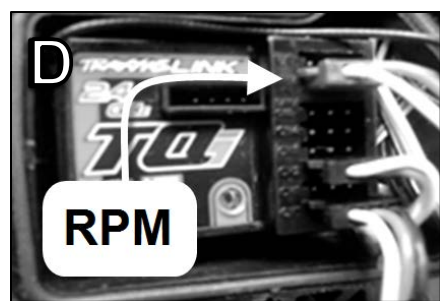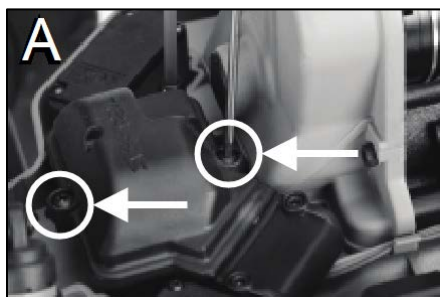

If you have questions or need technical assistance, call Traxxas at

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

TRAXXAS.COM