

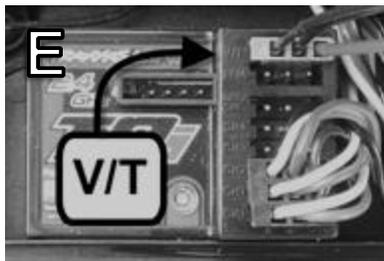


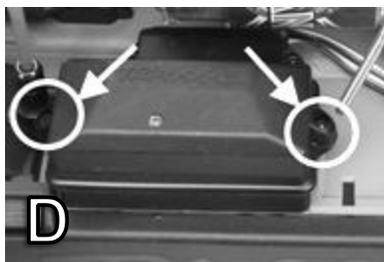

E-MAXX and E-MAXX Brushless Temp Sensor Installation

Covers Part Number(s):
6523, 6535

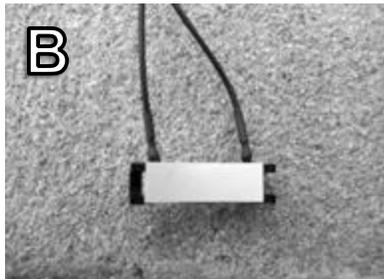


Required:

- Temp Sensor 6523
- Wire Clamp 6535

Tools Needed:

- 2.0mm hex wrench

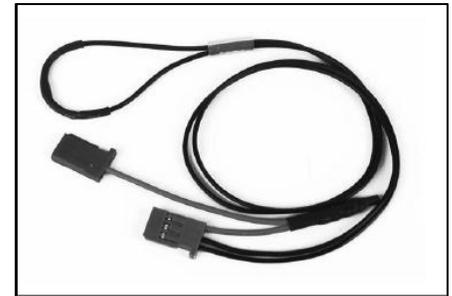

Installation Steps:

1. Insert temp wire sensor into plastic bracket (included) (A). Peel backing off thermal pad and place on plastic bracket (B).
2. Secure temp sensor to motor with tie wrap (C). Trim off excess tie wrap.
3. Using a 2.0mm hex wrench, remove wire cover and upper receiver box cover (D).
4. Route temp sensor through cover and plug the grey connector into V/T slot on receiver (E). The red connector will only be used if your vehicle is equipped with a voltage sensor. If not used, coil the wire and place beside the receiver unplugged.
5. Reinstall wire cover and upper receiver box cover (add grease to foam pads on receiver box to ensure watertight seal).

If you have questions or need technical assistance, call Traxxas at

1-888-TRAXXAS

(1-888-872-9927) (U.S. residents only)

TRAXXAS.COM