


TEC II STOCK

Instructions & Assembly

This product for use only with the Tec-Launch

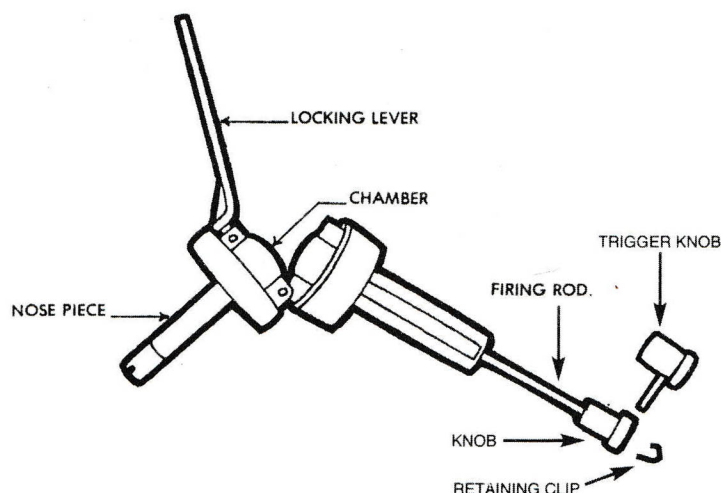

Prior to using the Tec II, the Trigger Knob must be installed. To install the trigger knob, extend firing rod. With rod extended, slide old knob forward and remove metal retaining clip at rear of rod. Remove old knob and slide new trigger knob onto the rod and replace retaining clip. Launcher is now ready to be attached to stock.

Align trigger knob and locking lever with groove in tube. Push launcher into tube until base plate rests on end of tube. **HAND TIGHTEN ONLY** the launcher retaining screw.

Follow launcher loading and usage instructions on reverse side.

Proper launching position for the Tec II is with the recoil pad resting firmly on thigh (see photo).

We do not recommend the Tec II to be used as a shoulder stock. Use safety glasses, hearing protection and gloved hand to hold the stock when using this product.

To launch dummy, pull trigger knob back and release when ready to fire.