


CORD TO BE 16/2 SJOW/SJOW-A
ASS'Y SUPPLIED WITH PIPE MOUNTING BRACKET AND
SST HOSE CLAMP (RANGE Ø2½" TO Ø1.9")




VERTICAL FLOAT


PAGE
1

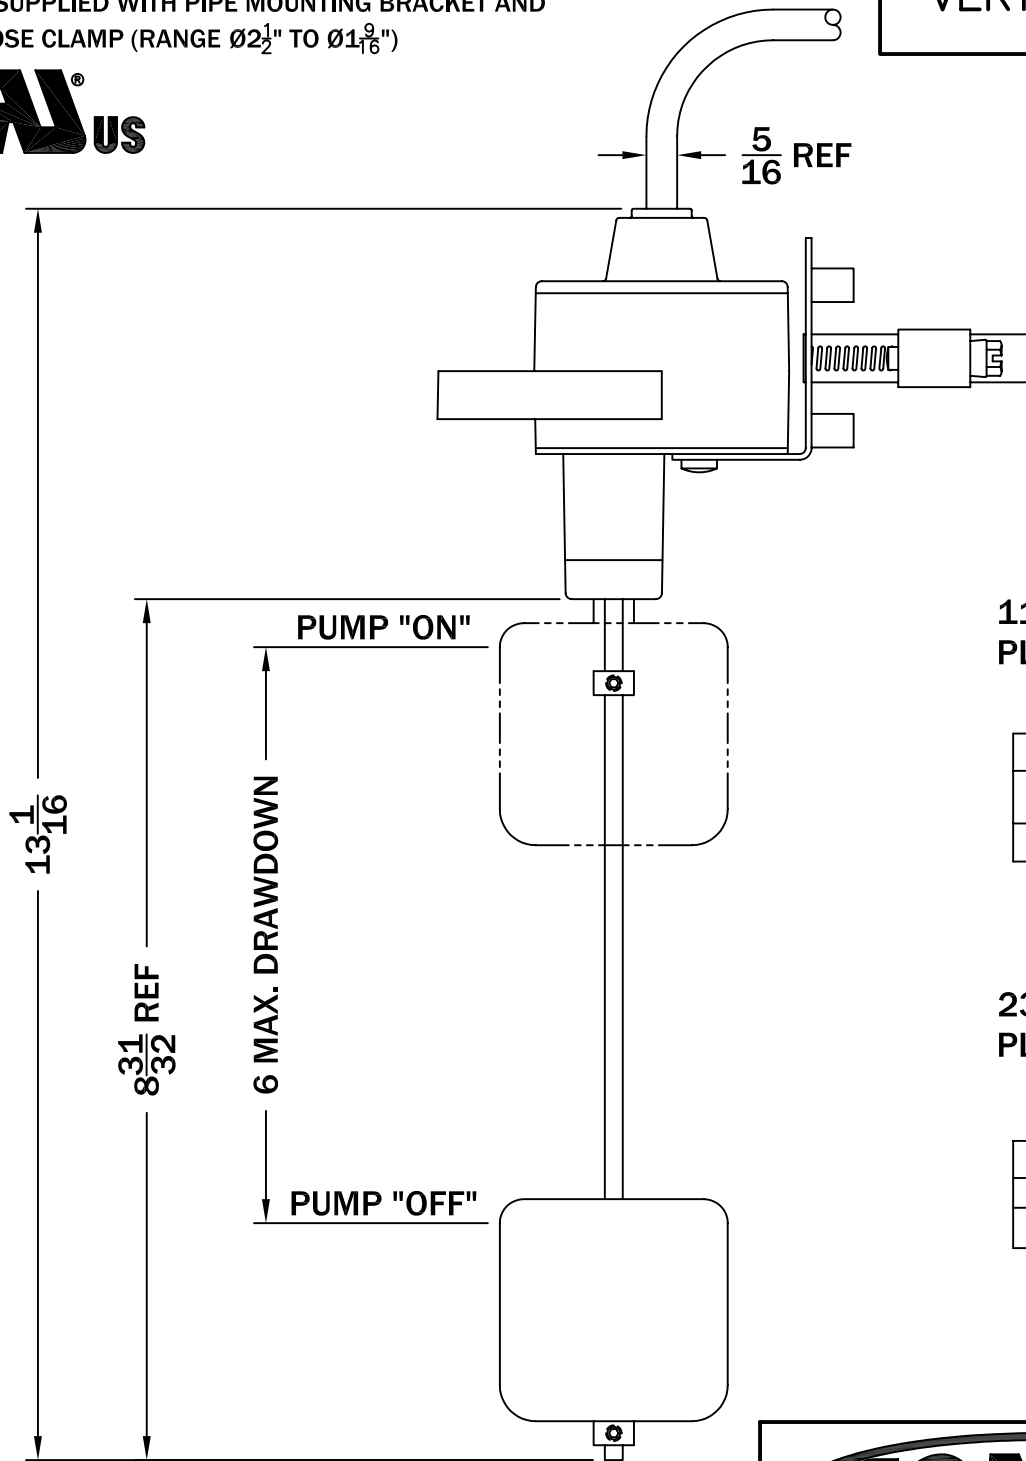

**115V PIGGYBACK
PLUG OPTIONAL**



**230V PIGGYBACK
PLUG OPTIONAL**



ALL INFORMATION CONTAINED IN THIS DRAWING IS
CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005	D. MIDDLETON	02/20/04
E	.xx = ±.010	MATERIAL SPECIFICATION: AS NOTED	
D	FRACTIONAL		
C	x/x = ±.1/64		
B	ANGLES		
A	x' = ±1/2'		

**SPECIFICATION SHEET
MECHANICAL FLOAT**

SCALE: PART NO.


HALF

VERTICAL FLOAT

**TYPICAL APPLICATION
SIMPLEX PUMP SYSTEM**

VERTICAL SWITCH

PAGE
2

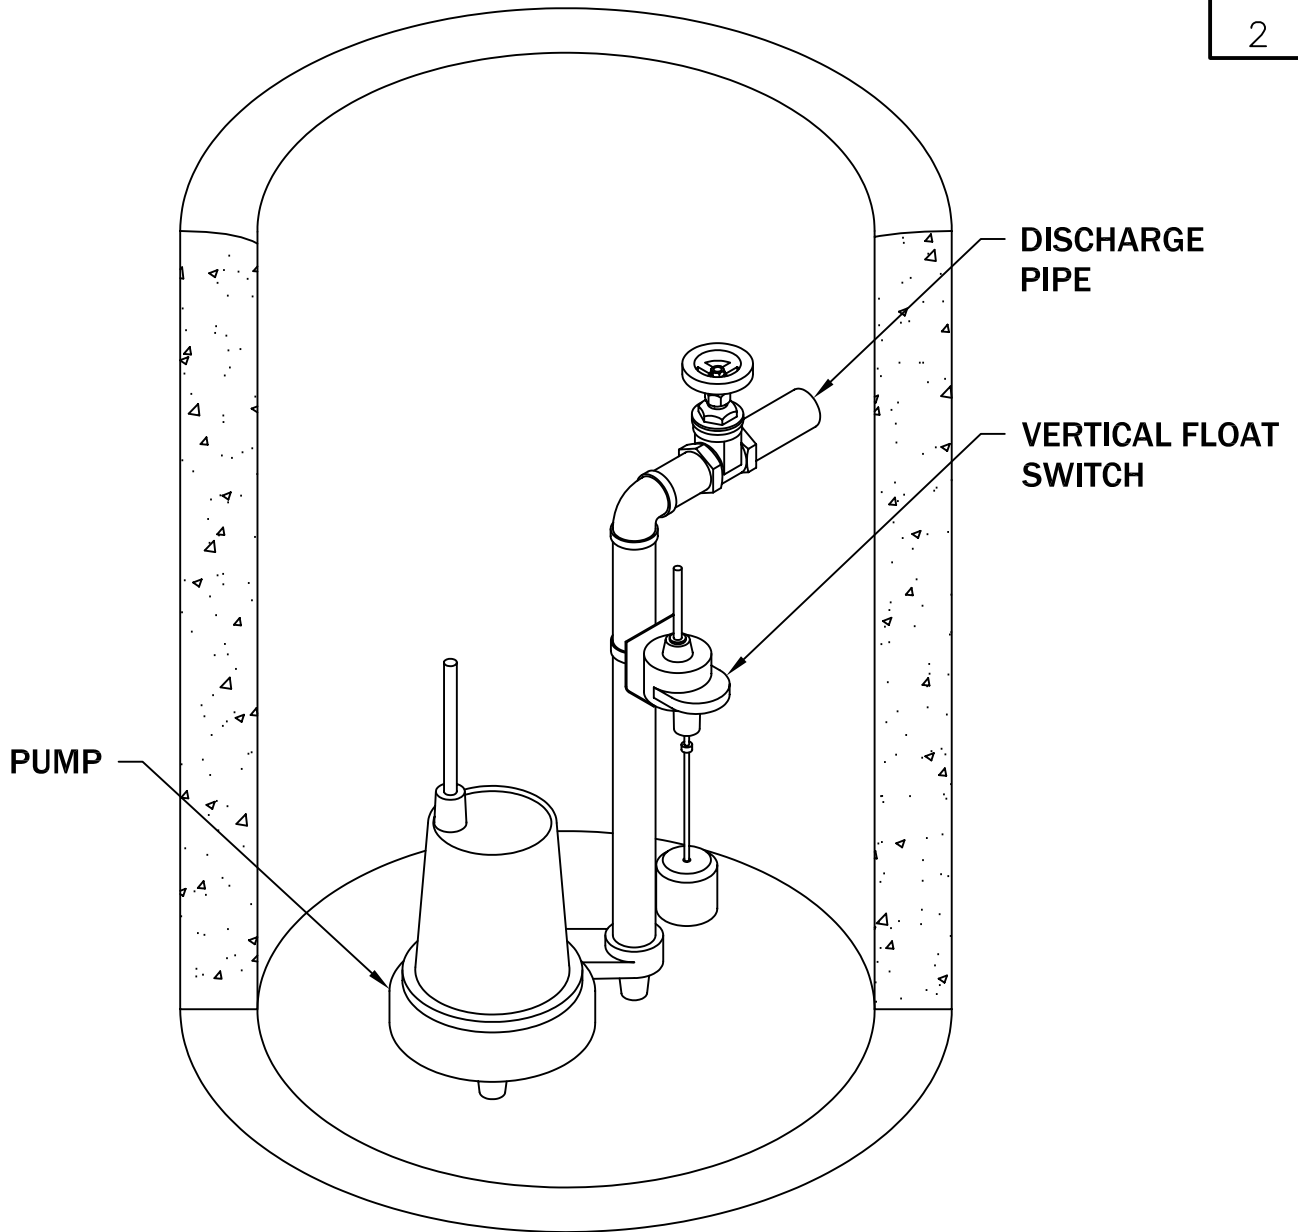

ALL INFORMATION CONTAINED IN THIS DRAWING IS
CONFIDENTIAL AND PROPRIETARY TO CONERY MFG, INC.



CHANGES	TOLERANCES	DRAWN BY	DATE	SPECIFICATION SHEET MECHANICAL FLOAT	
F	DECIMALS	D. MIDDLETON	02/20/04		
E	.XXX = ±.005	MATERIAL SPECIFICATION: AS NOTED		SCALE:	PART NO.
D	.XX = ±.010			NONE	VERTICAL SWITCH
C	FRACTIONAL				
B	X/X = ±.1/64				
A	ANGLES				
	X' = ±1/2'				