

NXTGen™

VCMX



VCMX-20ULS



VCMX-20ULST



VCMX-20UL




VCMX-20ULS-C

Features:

- Slimmer Footprint: 4.8" x 10.2" x 6.5" size
- Oil Resistant Tank and Check Valve
- 1/4-Turn Check Valve
- External Overflow Safety Switch
- External Test/Run Lever
- Patent-Pending Cooling Design
- External Tank Anti-Sweat Sleeve
- Multiple Brackets: steel mounting bracket for use on either side of the tank
- 20' Shut-off head (115v Models)
- 6' power cord
- Two-Year Warranty
- Rubber Feet
- Thermal overload protection
- cCSAus listed
- Vertical type pump unit

Engineering Data

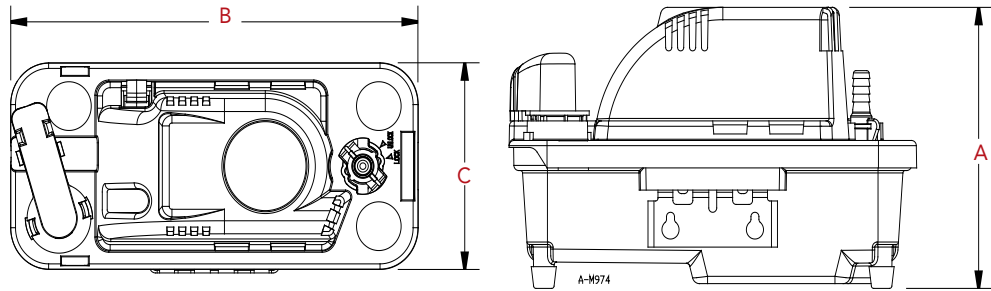

Dimensions

| Model No | DIM "A" | DIM "B" | DIM "C" |
|--------------|----------------|------------------|-----------------|
| VCMX-20UL | 6.5" (165.1mm) | 10.2" (259.1 mm) | 4.8" (121.9 mm) |
| VCMX-20ULS | 6.5" (165.1mm) | 10.2" (259.1 mm) | 4.8" (121.9 mm) |
| VCMX-20ULST | 6.5" (165.1mm) | 10.2" (259.1 mm) | 4.8" (121.9 mm) |
| VCMX-20ULS-C | 6.8" (172.7mm) | 10.3" (261.6 mm) | 5.1" (129.5 mm) |

Specifications

NXTGen™

Performance (GPH @ Height in Feet)

| Model No | Item No | Listing | Volts | Hz | Amps | Watts | Check Valve | Safety Switch | 1 | 5 | 10 | 15 | 20 | Shutoff (Feet) | Cord |
|----------|------------|---------|-------|-------|---------|-------|-------------|---------------|----|----|----|----|----|----------------|------|
| 554520 | VCMX-20UL | cCSAus | 115 | 60 | 1.5 | 93 | 3/8" | No | 84 | 75 | 60 | 42 | 10 | 21 | 6' |
| 554521 | VCMX-20UL | cCSAus | 230 | 50/60 | 0.6/0.5 | 75 | 3/8" | No | 78 | 67 | 51 | 29 | 0 | 19 | 6' |
| 554530 | VCMX-20ULS | cCSAus | 115 | 60 | 1.5 | 93 | 3/8" | Yes | 84 | 75 | 60 | 42 | 10 | 21 | 6' |
| 554531 | VCMX-20ULS | cCSAus | 230 | 50/60 | 0.6/0.5 | 75 | 3/8" | Yes | 78 | 67 | 51 | 29 | 0 | 19 | 6' |

NXTGen™ with tubing

Performance (GPH @ Height in Feet)

| Model No | Item No | Listing | Volts | Hz | Amps | Watts | Check Valve | Safety Switch | 1 | 5 | 10 | 15 | 20 | Shutoff (Feet) | Cord |
|----------|-------------|---------|-------|----|------|-------|-------------|---------------|----|----|----|----|----|----------------|------|
| 554550 | VCMX-20ULST | cCSAus | 115 | 60 | 1.5 | 93 | 3/8" | Yes | 84 | 75 | 60 | 42 | 10 | 21 | 6' |


NXTGen™ with Anti-Sweat Sleeve

Performance (GPH @ Height in Feet)

| Model No | Item No | Listing | Volts | Hz | Amps | Watts | Check Valve | Safety Switch | 1 | 5 | 10 | 15 | 20 | Shutoff (Feet) | Cord |
|----------|--------------|---------|-------|----|------|-------|-------------|---------------|----|----|----|----|----|----------------|------|
| 554542 | VCMX-20ULS-C | cCSAus | 115 | 60 | 1.5 | 93 | 3/8" | Yes | 84 | 75 | 60 | 42 | 10 | 21 | 6' |

Construction

| | |
|--------------------|---------------|
| Motor | 1/30 HP |
| Liquid Temperature | Up to 120° |
| Tank | Polypropylene |
| Cover | ABS |
| Volute | ABS |
| Impeller | Polypropylene |
| Check Valve | Acetal |
| Float | ABS |

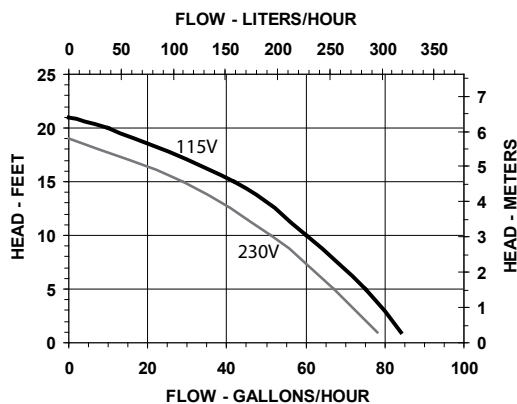

Replacement Parts

| Item | Part Number |
|--|-------------|
| Tank | 154390 |
| Feet, Rubber (4 pack 554520, 554530, 554550, 554521, 554531) | 925047 |
| Cover, Motor | 154425 |
| Float Arm Assembly | 154460 |
| Check Valve, 3/8" | 154724 |
| Safety Switch Assembly (554530, 554550, 554542, 554531) | 599136 |
| Anti-Sweat Sleeve and Bracket (554542) | 599138 |
| Bracket, Tank (554520, 554530, 554550, 554521, 554531) | 154483 |



Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: 1.800.701.7894
Fax: 1.800.678.7867
www.LittleGiantPump.com