

FLOMAX 15 self-priming centrifugal pump is designed to fit standard NEMA "C" frame motors with standard armature shafts. The PUMPAK is completely assembled and can be mounted to a standard motor in minutes.

FLOMAX 15 is made in bronze, aluminum, or cast iron construction to suit a wide variety of liquids. All fasteners are stainless steel to reduce corrosion. Impellers are balanced and trimmed to insure non-overloading conditions. Standards stainless steel and Viton mechanical seal is self-adjusting and corrosion resistant to handle many different liquids. Special seals, optional EPDM gaskets and check valves are also available. Pump assemblies are offered with open drip-proof, TEFC, and explosion-proof NEMA design motors, or as PUMPAKS only to fit customer's standard motors.

PUMP SPECIFICATIONS

Suction and Discharge.....	3" x 3"
Housing.....	Cast Iron, bronze or aluminum
Impeller.....	Cast Iron, bronze or aluminum
Shaft Sleeve.....	Stainless steel to fit 1 1/8" shaft
Fasteners.....	All Stainless Steel
Seals.....	Standard Viton. Special seal material combinations available (Consult factory)

FLOMAX 15

3" X 3" Self- Priming Pump

Close-Coupled to
Electric Motor

or

PUMPAK Only to Mount
to Standard NEMA "C"
Face Motor

5 HP • 7.5 HP

UP TO 300 GPM
UP TO 125 FEET HEAD

Available in:

BRONZE
ALUMINUM
CAST IRON

• WITH OR WITHOUT
ELECTRIC MOTOR



MP PUMPS, INC.

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com


FLOMAX 15

3" x 3"


**HIGH CAPACITY
SELF-PRIMING
CENTRIFUGAL**

FLOMAX 15

FRAME	MOTOR			DIMENSION			
	HP	PH	ENCL	A	B	C	D
184 TC	5	3	TEFC	27,02		9,70	5,88
184 TC	7,5	3	TEFC	28,52		9,70	5,88
213 C	5	3	TEFC	27,02		11,32	7,38
213 C	5	3	ODP	25,66		11,32	7,38
213 C	5	1	TEFC	28,64	14,08	11,32	7,38
215 C	7,5	3	TEFC	28,64		11,32	7,38

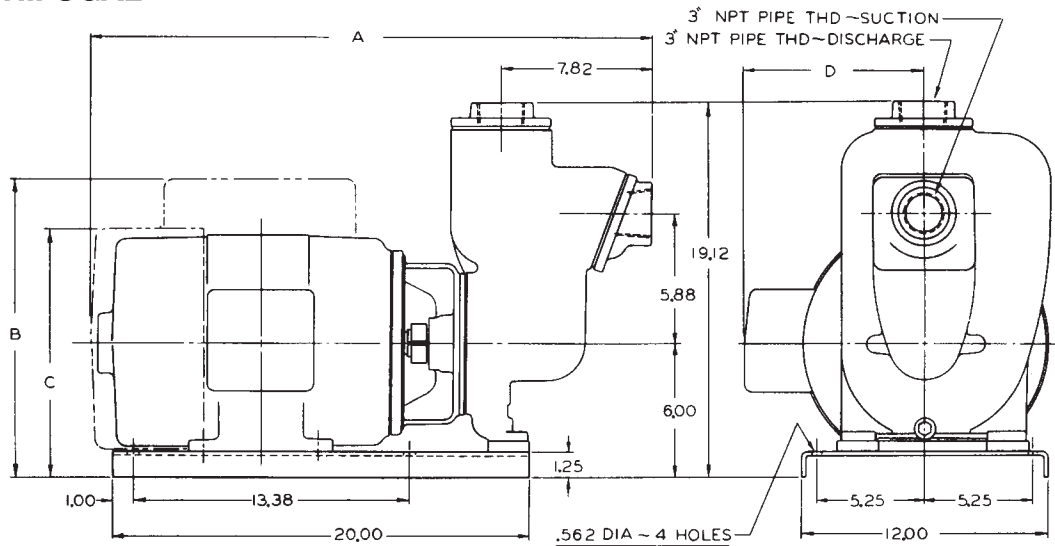

FLOMAX 15
3 x 3 SELF-PRIMING PUMP
3450 RPM S.G. = 1.0

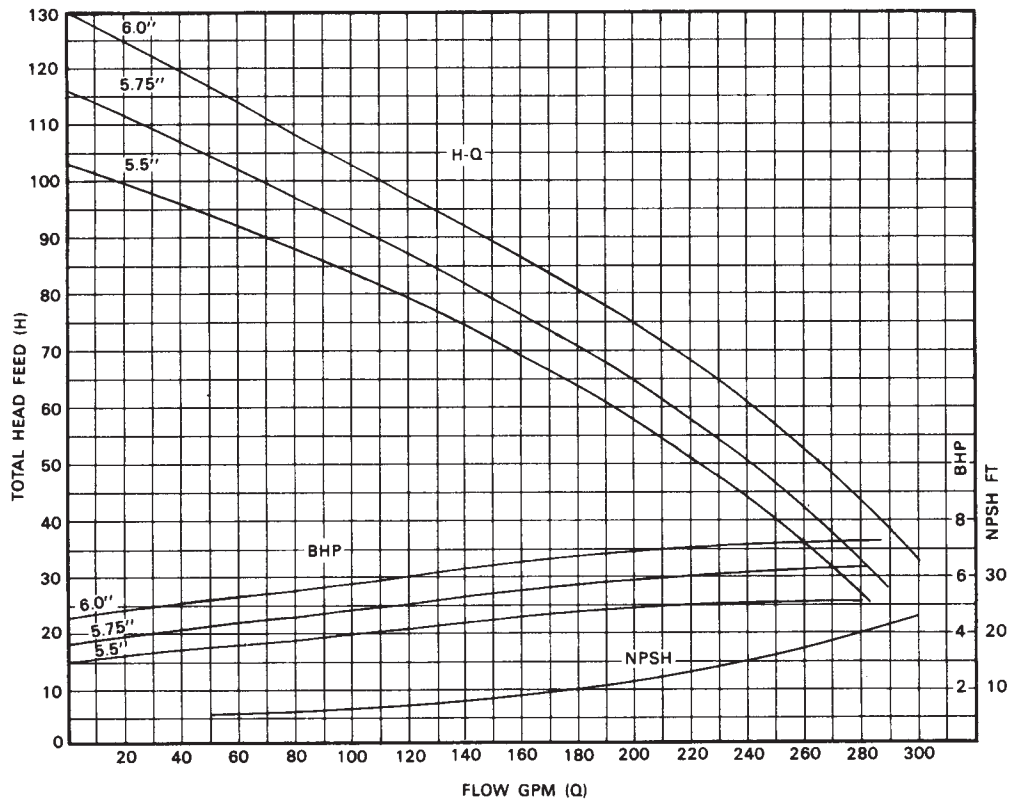

34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com