




Y12731 & Y12732 Ganging/Interlocking Stack Chair



1.) Attach legs to seat/back shell with 6 screws.

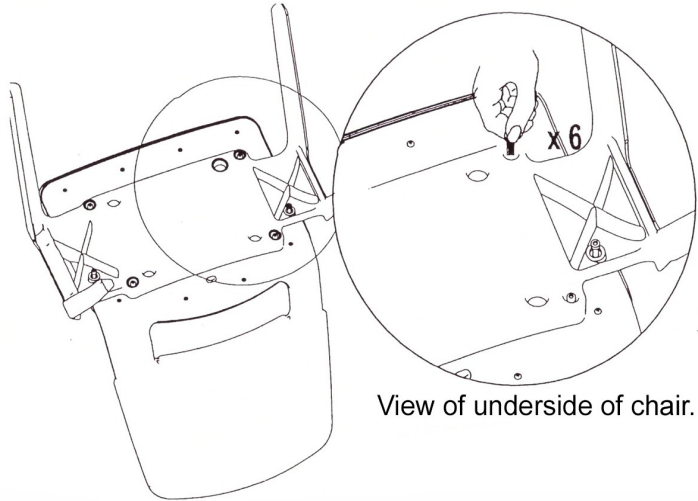

View of underside of chair.

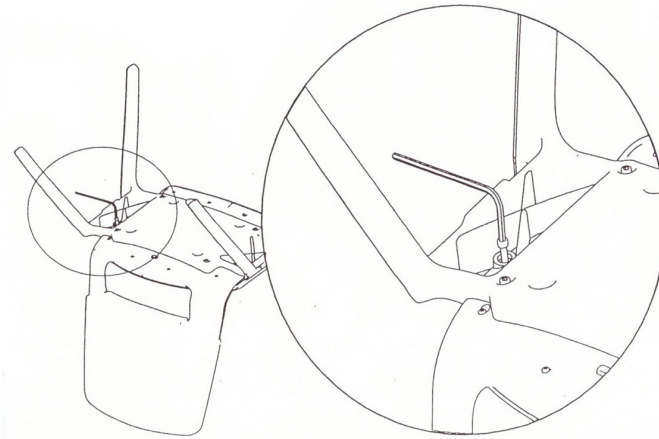

2.) If purchased with optional fabric padded seat, use a Phillips screwdriver to remove 10 Phillips screws from the underside of the seat. Remove the resin seat and replace with your padded seat. Reattach using the same screws.

