


639-MAL Leather Big & Tall Chair

Assembly Instructions

PARTS LIST:

<u>PARTS:</u>	<u>QTY</u>	<u>PARTS:</u>	<u>QTY</u>
Seat Cushion	1	Gas lift w/cover	1
Backrest	1	Armrest Knob	2
Base	1	Mechanism	1
Set of 5 casters	1	Screw & washer set	4 ea
		Allen Wrench	1

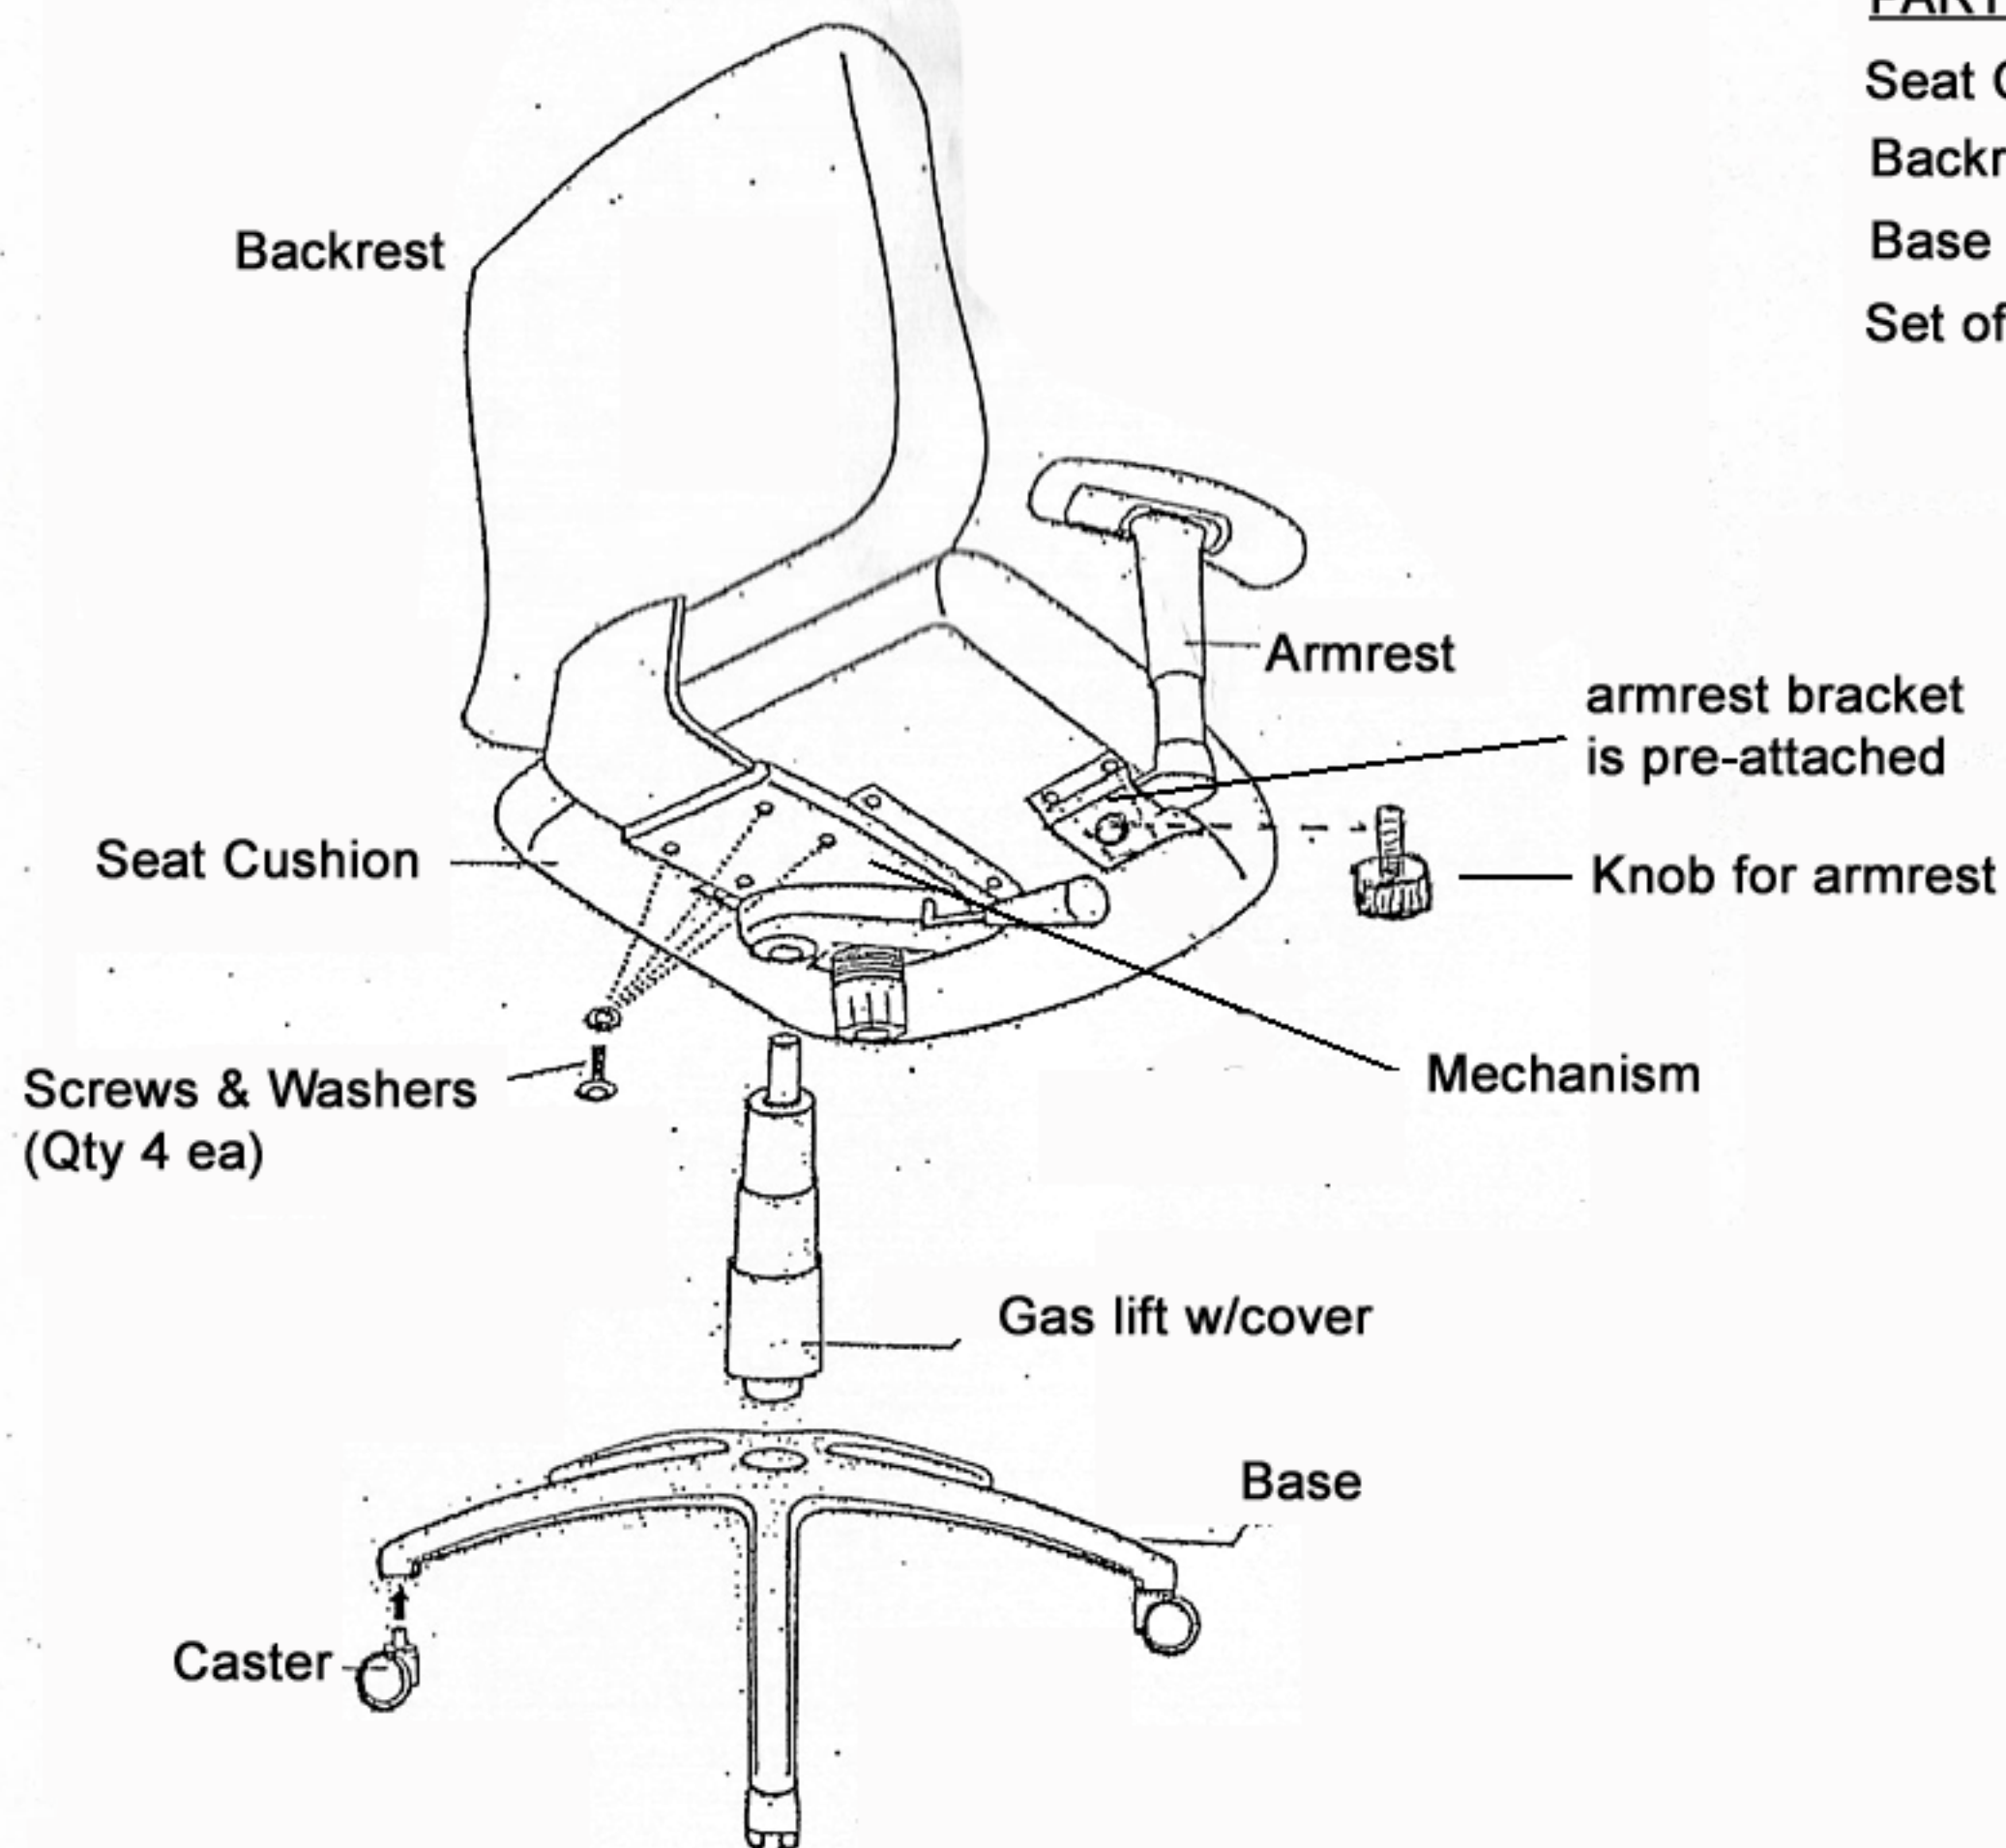

1.) Snap casters into base by hand.

2.) Insert gas lift into center of base, then place covers over gas lift.

3.) Now, align the backrest bracket holes with the holes of the mechanism and attach both to the seat cushion with the screws and washers provided.

4.) Insert Left & Right Arms into pre-installed brackets and secure arms with armrest knobs.

5.) Fit the two chair halves together by centering the hole in the mechanism over the gas lift. Press down firmly and then carefully sit in the chair to pressure fit together.

Note: Keep Allen Wrench! Retighten screws once every 6 months as part of regular chair maintenance