



SPECIFICATIONS

AK50S

EXHAUST FAN



50 CFM/0.5 Sones @ 0.10" SP.
40 CFM @ 0.25 SP.

• Grill

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 11" x 13 3/4".

• Blower Wheel

One piece polymeric centrifugal blower wheel, 5 7/32" diameter, 2 29/32" wide, with 30 paddles.

• Motor

Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, suitable for continuous operation. Rated 120 volts, 60 hz.

• Fan Housing

23 gauge galvanized steel housing.
 Dimensions: 10 7/8" x 9 3/8" x 7 7/8".

• Duct Collar

Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.

• Ventilating Area


For bathrooms up to 50 sq. ft. For other rooms up to 60 sq. ft.

• Electrical Connections

1/2" electrical knockouts provided.

• Single Pack Shipping Info

Box Dim Box Dim: 14 1/8" x 11 5/8" x 9 5/8"
 UPC: 0-8316225321-7
 Shipping Weight: 11.5 lbs.

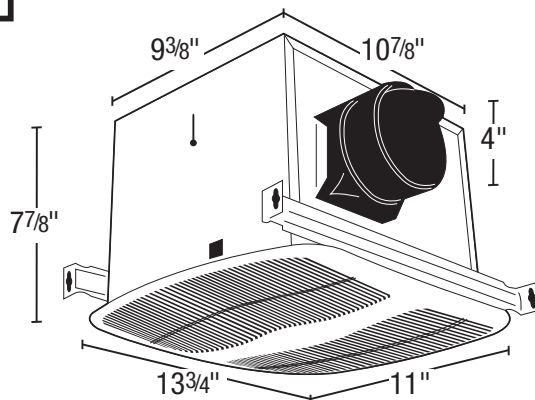

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



• Unit Mounting

The housing will mount in ceilings with at least 8" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 11 1/8" x 9 5/8". The housing will mount either between 16" or 24" on center joists, using the 4 supplied housing mounting rails. The housing mounting rails can be adapted for overhead mounting (hardware not provided).

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
	0	0.05	0.1	0.2	0.25	0.3	0.35				
Air Flow - CFM	57	54	50	44	40	35	27	0.5	870	14.5	0.2

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048