



INDUSTRIAL AND COMMERCIAL FAN CATALOG

TABLE OF CONTENTS

<i>Introduction</i>	<i>2</i>	<i>Government Fans</i>	<i>13</i>
<i>Industrial Grade Drum Fans and Tilt Stands</i>	<i>3</i>	<i>Window Fans</i>	<i>14</i>
<i>Industrial Grade Quiet Pedestal Fan</i>	<i>4</i>	<i>Industrial Ceiling Fans</i>	<i>15</i>
<i>Industrial Grade Quiet Wall Mount Fans</i>	<i>5</i>	<i>Pivoting Blowers</i>	<i>16</i>
<i>1/3 HP Industrial Grade Fan Components</i>	<i>6</i>	<i>Commercial Grade Box Fan and Roll-About Stand</i>	<i>17</i>
<i>1/3 HP Industrial Grade Air Circulators</i>	<i>7</i>	<i>Oscillating Tower Fan</i>	<i>18</i>
<i>1/4 HP Industrial Grade Fan Components</i>	<i>8</i>	<i>Commercial Grade Oscillating Fans</i>	<i>18, 19</i>
<i>1/4 HP Industrial Grade Air Circulators</i>	<i>9</i>	<i>Commercial Grade Pivot and Office Fans</i>	<i>20</i>
<i>20" and 18" Industrial Grade Fans</i>	<i>10</i>	<i>Portable Electric Heaters</i>	<i>21</i>
<i>Industrial Grade Multi Mount and Dock Fans</i>	<i>11</i>	<i>Index</i>	<i>22, 23</i>
<i>Industrial Grade Floor Fans</i>	<i>12</i>		

VALUE, QUALITY, AND SERVICE

As a leading supplier of Industrial and Commercial Grade Air Circulators, Air King is recognized throughout the industry for the superior quality and performance of its products. Our four North American manufacturing facilities ensure every Air King fan is precision-designed, engineered, and tested to meet the high standards our customers have come to expect. We strive every day to exceed our customers' expectations for Value, Service and Quality. Our product design team is constantly working to develop new products to meet the changing needs of today's market place while also keeping our existing products the leader's in the industry. In this way Air King ensures that our customers are always offered the right product at the right price.

PRODUCTS THAT EXCEED YOUR EXPECTATIONS

From Industrial to Commercial Grade fans, Wall Mounts to Pivoting Air Circulators, Air King offers a full line of fans to meet your needs for the workplace. Every Air King fan features a permanently lubricated motor to provide maintenance-free operation and are rigorously tested prior to shipping to provide high volume air movement with years of trouble-free operation. Every fan features a three-wire grounded plug and cord; and fan guards that meet with OSHA requirements. Air King warrants motors for three years, all other fan parts have a one year warranty.

THE AIR KING DIFFERENCE

Customer service is a title that everyone in our company shares. From our corporate staff to our nationwide network of manufacturer's representatives, we are dedicated to making sure your questions are addressed and answered quickly and accurately.



INDUSTRIAL GRADE DRUM FANS AND TILT STANDS

When the goal is to move a large amount of air, the Air King Drum Fans and Tilt Stands are the perfect solution.

PRODUCT INFORMATION

Motor

2-speed, 1/3 HP, 120V, 1 phase, ball bearing, permanently lubricated, permanent split capacitor (models 9936D, 9936TS, 9942D, 9942TS, 9242TS)

2-speed, 1/2 HP, 120V, 1 phase, ball bearing, permanently lubricated, permanent split capacitor (models 9236D, 9236TS)

Controls

Side mounted switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

Belt Drive
9942D, 9936D



Direct Drive
9236D



Drum Fan with Tilt Stand
9942TS, 9242TS,
9936TS, 9236TS



SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9942TS	42" Belt Driven Drum Fan with Swivel Stand	42"	50"L x 23"W x 55"H	117.0	31.50	\$885.00
9942D	42" Belt Driven Drum Fan		47"L x 19"W x 45"H	93.0	23.90	\$699.00
9242TS	42" Direct Drive Drum Fan with Swivel Stand		50"L x 23"W x 55"H	97.0	31.50	\$694.00
9936TS	36" Belt Driven Drum Fan with Swivel Stand	36"	43"L x 20"W x 40.5"H	83.0	19.75	\$725.00
9936D	36" Belt Driven Drum Fan		40"L x 20"W x 40.5"H	75.0	18.75	\$590.00
9236TS	36" Direct Drive Drum Fan with Swivel Stand		43"L x 16"W x 40.5"H	87.0	19.75	\$625.00
9236D	36" Direct Drive Drum Fan		38"L x 16"W x 40.5"H	61.0	14.25	\$500.00

PERFORMANCE

MODEL	TYPE	CFM		RPM		AMPS		WATTS		DB A	
		HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW
9942TS, 9942D 9242TS	42" 1/3 HP	13000	8600	490	320	6.50	3.80	460	235	68	58
9936D, 9936TS	36" 1/3 HP	9200	6000	575	380	6.50	3.70	440	230	62	55
9236D, 9236TS	36" 1/2 HP	10900	7850	1120	805	6.60	5.70	725	565	78	66

Specifications are subject to change.



INDUSTRIAL GRADE QUIET PEDESTAL FANS

Industrial Grade Quiet Pedestal Fans provide the perfect solution for spaces that need high volume air movements while still being quiet. Perfect for churches, banquet halls, auditoriums, and other large spaces.

The Quiet Pedestal Fans incorporate a quiet speed into the controls of the fan. This quiet speed allows the fan to operate at a reduced sound level, while still delivering powerful air circulation. For times when additional power is needed, the fan can be operated using the other speeds.

Another feature of the Quiet Pedestal Fan is the noise reduction base. This specially engineered base minimizes the amount of noise producing vibration that transfers from the unit to the floor.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

Height

Adjustable from 60" to 84" (model 99532)

Adjustable from 57" to 81" (model 99533)

Oscillation

90°



30" Quiet Pedestal Fan
99532

24" Quiet Pedestal Fan
99533



SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
99532	30" Quiet, Oscillating Pedestal Fan	30"	33.5"L x 29.5"W x 84"H	70.0	6.03	\$490.00
99533	24" Quiet, Oscillating Pedestal Fan	24"	29.5"L x 29.5"W x 81"H	66.4	8.26	\$460.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET
99532	30" 1/4 HP	7450	6090	3450	1010	860	530	2.2	1.6	0.6	245	185	70	68	64	50
99533	24" 1/4 HP	5030	4320	2280	1025	880	480	2.0	1.6	0.6	250	190	70	69	65	48

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

* Decibels (DBA) on quiet speed is at least 10 decibels less than traditional fans. An increase of 10 decibels is perceived to be approximately twice as loud




INDUSTRIAL GRADE QUIET WALL MOUNTED FANS


Industrial Grade Quiet Wall Mount Fans provide the perfect solution for areas with limited floor space that need high volume air movements while still being quiet. Perfect for churches, banquet halls, auditoriums, and other large spaces.

The Quiet Wall Mount Fans incorporate a quiet speed into the controls of the fan. This quiet speed allows the fan to operate at a reduced sound level, while still delivering powerful air circulation. For times when additional power is needed, the fan can be operated using the other speeds.

Another feature of the Quiet Wall Mount Fan is the noise reduction wall bracket. This specially engineered bracket minimizes the amount of noise producing vibration that transfers from the unit to the wall.

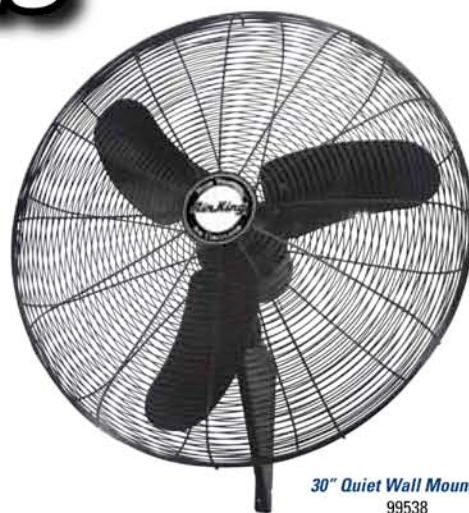

30" Quiet Wall Mount Fan
99538

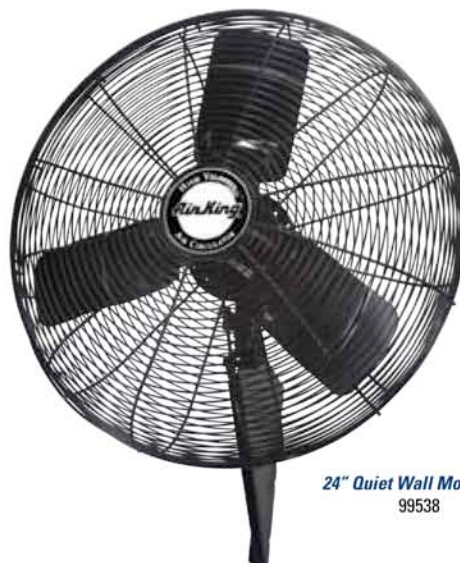

24" Quiet Wall Mount Fan
99539

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

Oscillation

90°



SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
99538	30" Quiet, Oscillating Wall Mount Fan	30"	33.5"L x 24"W x 33.5"H	53.5	6.03	\$395.00
99539	24" Quiet, Oscillating Wall Mount Fan	24"	27"L x 24"W x 27"H	49.5	8.26	\$365.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET	HIGH	MED	QUIET
99538	30" 1/4 HP	3560	3120	2510	1600	1450	1100	1.40	1.20	1.0	170	145	115	64	57	50
99539	24" 1/4 HP	5030	4320	2280	1025	880	480	2.0	1.6	0.6	250	190	70	69	65	48

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/3 HP INDUSTRIAL GRADE FAN COMPONENTS

Industrial Grade Fan Components allow the freedom to customize to suit your needs and reduce your assembly time and cost.

PRODUCT INFORMATION

Motor

3-speed, 1/3 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel


Compliance

ETL, OSHA


Oscillation

90° (models 9174H, 9175H)

Assembled Head
9170H, 9175H



Assembled Head
9171H, 9174H

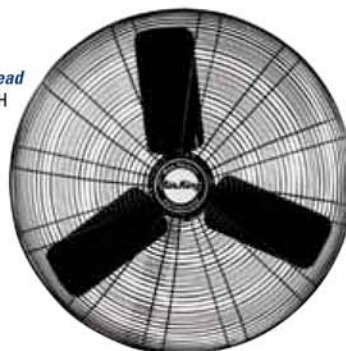

Wall Mount
9100WC



Pedestal Pole & Base
9100PB



I-Beam Mount
9100i



Ceiling Mount
9100CM



Pedestal Wheel Kit
9100WB



SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9170H	30" Assembled Head	30"	33.5"L x 17.5"W x 33.5"H	53.7	10.56	\$360.00
9175H	30" Assembled Oscillating Head		33.5"L x 17.5"W x 33.5"H	56.3	10.56	\$380.00
9171H	24" Assembled Head	24"	27"L x 17.5"W x 27"H	46.8	6.96	\$320.00
9174H	24" Assembled Oscillating Head		27"L x 17.5"W x 27"H	47.2	6.96	\$340.00
9100PB	Pedestal Pole & Base	N/A	30"L x 30"W x 42.5"H	31.4	1.04	\$140.00
9100WC	Wall Mounting Bracket	N/A	13"L x 2"W x 12.5"H	5.3	.19	\$42.00
9100CM	Ceiling Mounting Bracket	N/A	4.5"L x 4.5"W x 15"H	3.6	.28	\$66.00
9100i	I-Beam Mounting Bracket	N/A	32.5"L x 2"W x 21"H	9.8	.78	\$100.00
9100WB	Pedestal Wheel Kit (4" diameter)	N/A	4"L x 4"W x 9"H	2.2	.36	\$50.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/3 HP ¹	8780	7480	5570	1075	925	800	2.8	2.0	1.65	308	205	170	72	70	64
24" 1/3 HP ²	5770	5250	4270	1054	869	673	2.5	1.96	1.40	332	226	152	69	67	59

¹ Includes models 9170H, 9175H • ² Includes models 9171H, 9174H

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/3 HP INDUSTRIAL GRADE AIR CIRCULATORS

Ideal for plants, warehouses, large offices, and other industrial spaces that require powerful air circulation

PRODUCT INFORMATION

Motor

3-speed, 1/3 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

Height

Adjustable from 64" to 90" (models 9170, 9175)

Adjustable from 61" to 88" (models 9171, 9174)

Oscillation

90° (models 9174, 9175, 9074, 9075, 9374, 9375, 9674, 9675)


Fans are shipped unassembled in one UPS shippable carton



24" models utilize our traditional rectangular designed fan blade

Pedestal

9170, 9175, 9171, 9174

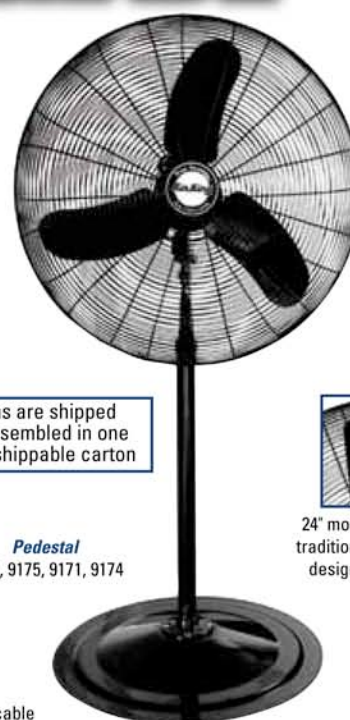

Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.



Wall Mount

9070, 9075, 9071, 9074



Ceiling Mount

9370, 9375, 9371, 9374



I-Beam Mount

9670, 9675, 9671, 9674

SPECIFICATIONS

	MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
PEDESTAL	9170	30" Pedestal Fan	30"	33.5"L x 29"W x 90"H	80.0	6.03	\$420.00
	9175	30" Oscillating Pedestal Fan	30"	33.5"L x 29"W x 90"H	82.6	6.03	\$448.00
	9171	24" Pedestal Fan	24"	27"L x 29"W x 88"H	73.5	8.26	\$410.00
	9174	24" Oscillating Pedestal Fan	24"	27"L x 29"W x 88"H	76.1	8.26	\$440.00
WALL	9070	30" Wall Mounted Fan	30"	33.75"L x 25.75"W x 38.75"H	44.9	6.03	\$370.00
	9075	30" Oscillating Wall Mount Fan	30"	33.75"L x 25.75"W x 38.75"H	46.6	6.03	\$380.00
	9071	24" Wall Mounted Fan	24"	26.75"L x 25"W x 34.5"H	38.4	8.26	\$360.00
	9074	24" Oscillating Wall Mount Fan	24"	26.75"L x 25"W x 34.5"H	40.1	8.26	\$380.00
CEILING	9370	30" Ceiling Mount Fan	30"	33.5"L x 29"W x 36.75"H	42.9	6.03	\$420.00
	9375	30" Oscillating Ceiling Mount Fan	30"	33.5"L x 29"W x 36.75"H	44.9	6.03	\$460.00
	9371	24" Ceiling Mount Fan	24"	27"L x 29"W x 33.63"H	36.7	8.26	\$400.00
	9374	24" Oscillating Ceiling Mount Fan	24"	27"L x 29"W x 33.63"H	38.4	8.26	\$420.00
I-BEAM	9670	30" I-Beam Mount Fan	30"	42"L x 33"W x 44"H	77.3	6.03	\$420.00
	9675	30" Oscillating I-Beam Mount Fan	30"	42"L x 33"W x 44"H	81.7	6.03	\$460.00
	9671	24" I-Beam Mount Fan	24"	41"L x 27"W x 41"H	70.8	8.26	\$420.00
	9674	24" Oscillating I-Beam Mount Fan	24"	41"L x 27"W x 41"H	75.2	8.26	\$448.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/3 HP ¹	8780	7480	5570	1075	925	800	2.8	2.0	1.65	308	205	170	72	70	64
24" 1/3 HP ²	5770	5250	4270	1054	869	673	2.5	1.96	1.40	332	226	152	69	67	59

¹ Includes models 9170, 9175, 9070, 9075, 9370, 9375, 9670, 9675 • ² Includes models 9171, 9174, 9071, 9074, 9371, 9374, 9671, 9674

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/4 HP INDUSTRIAL GRADE FAN COMPONENTS

Industrial Grade Fan Components allow the freedom to customize to suit your needs and reduce your assembly time and cost.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel


Compliance

ETL, OSHA

Oscillation

90° (models 9135H, 9125H)

Assembled Head
9130H, 9135H, 9124H,
9125H, 9120H, 9121H

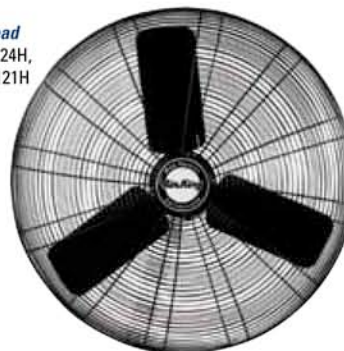

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9130H	30" Assembled Head	30"	33.5"L x 16.5"W x 33.25"H	53.7	10.56	\$310.00
9135H	30" Assembled Oscillating Head		33.5"L x 16.5"W x 33.25"H	56.3	10.56	\$425.00
9124H	24" Assembled Head	24"	27"L x 16.5"W x 27"H	46.8	6.96	\$360.00
9125H	24" Assembled Oscillating Head		27"L x 16.5"W x 27"H	47.2	6.96	\$290.00
9120H	20" Assembled Head	20"	23.5"L x 15"W x 23.5"H	29.8	6.87	\$250.00
9121H	20" Assembled Oscillating Head		23.5"L x 15"W x 23.5"H	31.6	6.87	\$280.00
9100PB	Pedestal Pole & Base	N/A	30"L x 30"W x 42.5"H	31.4	1.04	\$140.00
9100WC	Wall Mounting Bracket	N/A	13"L x 2"W x 12.5"H	5.3	.19	\$42.00
9100CM	Ceiling Mounting Bracket	N/A	4.5"L x 4.5"W x 15"H	3.6	.28	\$66.00
9100i	I-Beam Mounting Bracket	N/A	32.5"L x 2"W x 21"H	9.8	.78	\$100.00
9100WB	Pedestal Wheel Kit (4" diameter)	N/A	4"L x 4"W x 9"H	2.2	.36	\$50.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/4 HP ¹	7400	6360	4980	1040	902	860	2.40	1.86	1.46	255	200	154	75	71	67
24" 1/4 HP ²	5130	4490	3670	1060	925	745	2.39	1.86	1.52	252	199	157	72	69	64
20" 1/4 HP ³	3960	3630	3020	1061	956	747	2.39	1.86	1.52	248	201	161	64	61	55

¹ Includes models 9170H, 9175H • ² Includes models 9171H, 9174H • ³ Includes model 9020H, 9121H
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/4 HP INDUSTRIAL GRADE AIR CIRCULATORS

Ideal for plants, warehouses, large offices, and other industrial spaces that require powerful air circulation

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted pull cord switch

Power Cord

Black, 10', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA

Height

Adjustable from 64" to 90" (models 9130, 9135)

Adjustable from 61" to 88" (models 9124, 9125)

Oscillation

90° (models 9135, 9125, 9035, 9025, 9335, 9325, 9635, 9625)

Fans are shipped unassembled in one UPS shippable carton

Pedestal

9130, 9135, 9124, 9125

Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.

Wall Mount

9030, 9035, 9024, 9025

Ceiling Mount

9330, 9335, 9724, 9325

I-Beam Mount

9430, 9635, 9424, 9625

SPECIFICATIONS

	MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
PEDESTAL	9130	30" Pedestal Fan	30"	33.5"L x 29"W x 90"H	80.0	6.03	\$400.00
	9135	30" Oscillating Pedestal Fan		33.5"L x 29"W x 90"H	82.6	6.03	\$420.00
	9124	24" Pedestal Fan	24"	27"L x 29"W x 88"H	73.5	8.26	\$380.00
	9125	24" Oscillating Pedestal Fan		27"L x 29"W x 88"H	76.1	8.26	\$400.00
WALL	9030	30" Wall Mounted Fan	30"	33.75"L x 25.75"W x 38.75"H	44.9	6.03	\$320.00
	9035	30" Oscillating Wall Mount Fan		33.75"L x 25.75"W x 38.75"H	46.6	6.03	\$340.00
	9024	24" Wall Mounted Fan	24"	26.75"L x 25"W x 34.5"H	38.4	8.26	\$300.00
	9025	24" Oscillating Wall Mount Fan		26.75"L x 25"W x 34.5"H	40.1	8.26	\$320.00
CEILING	9330	30" Ceiling Mount Fan	30"	33.5"L x 29"W x 36.75"H	42.9	6.03	\$348.00
	9335	30" Oscillating Ceiling Mount Fan		33.5"L x 29"W x 36.75"H	44.9	6.03	\$388.00
	9724	24" Ceiling Mount Fan	24"	27"L x 29"W x 33.63"H	36.7	8.26	\$348.00
	9325	24" Oscillating Ceiling Mount Fan		27"L x 29"W x 33.63"H	38.4	8.26	\$370.00
I-BEAM	9430	30" I-Beam Mount Fan	30"	42"L x 33"W x 44"H	77.3	6.03	\$380.00
	9635	30" Oscillating I-Beam Mount Fan		42"L x 33"W x 44"H	79.9	6.03	\$420.00
	9424	24" I-Beam Mount Fan	24"	41"L x 27"W x 41"H	70.8	8.26	\$360.00
	9625	24" Oscillating I-Beam Mount Fan		41"L x 27"W x 41"H	74.2	8.26	\$400.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/4 HP ¹	7400	6360	4980	1040	902	860	2.40	1.86	1.46	255	200	154	75	71	67
24" 1/4 HP ²	5130	4490	3670	1060	925	745	2.39	1.86	1.52	252	199	157	72	69	64

¹ Includes models 9130, 9135, 9030, 9035, 9330, 9335, 9430, 9635 • ² Includes models 9124, 9125, 9024, 9025, 9724, 9325, 9424, 9625
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



20" and 18" INDUSTRIAL GRADE FANS

Ideal for gyms, auditoriums, schools, churches and industrial spaces that need powerful air circulation.

PRODUCT INFORMATION

Motor

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

Rear mounted rotary switch (models 9420, 9418)

Rear mounted pull cord switch (models 9020, 9518, 9320 9718, 9520, 9618)

Power Cord

Black, 9', 3-conductor, SJT type

Coating

Blade, Guard, and Mounts are powder coated steel

Compliance

ETL, OSHA




Height

Adjustable from 54" to 64" (model 9420)

Adjustable from 52" to 62" (model 9418)



Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.

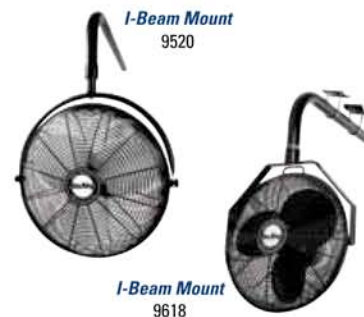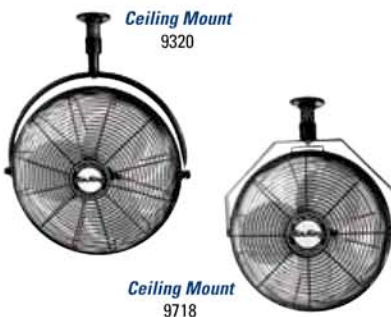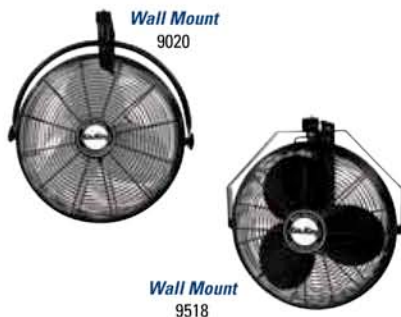

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9420	20" Pedestal Fan	20"	26.5"L x 23.25"W x 64"H	34.3	3.76	\$220.00
9020	20" Wall Mount Fan		26.5"L x 16.5"W x 29.5"H	26.0	3.47	\$188.00
9320	20" Ceiling Mount Fan		26.5"L x 10.5"W x 29.5"H	23.7	3.47	\$220.00
9520	20" I-Beam Mount Fan		36"L x 22"W x 42"H	47.6	3.47	\$260.00
9418	18" Pedestal Fan	18"	24"L x 24"W x 62"H	31.4	3.25	\$202.00
9518	18" Wall Mount Fan		24"L x 16.5"W x 28"H	24.8	2.80	\$180.00
9718	18" Ceiling Mount Fan		24"L x 10.5"W x 28"H	23.1	2.80	\$213.00
9618	18" I-Beam Mount Fan		24"L x 37.5"W x 38.5"H	36.9	4.90	\$260.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
20" 1/6 HP ⁴	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
18" 1/6 HP ⁵	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49

⁴ Includes models 9420, 9020, 9320, 9520 • ⁵ Includes models 9418, 9518, 9718, 9618

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL GRADE MULTI MOUNT and DOCK FANS

Fan can be mounted on walls, ceilings, I-beams and more, making it perfect for loading docks, restaurants, plants, health clubs and industrial areas where floor/table space is limited.

PRODUCT INFORMATION

Motor

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9318, 9218-22)

3-speed, 1/20 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9314)

3-speed, 1/25 HP, 120V, 1 phase, open motor, sleeve bearing, permanent split capacitor (model 9312)

Controls

Rear mounted pull cord switch

Power Cord

Black, 9', 3-conductor, SJT type (models 9318, 9314, 9312)


Black, 22", 3-conductor, SJT type (model 9218-22)

Coating

Blade, Guard, and Mounts are powder coated steel


Compliance

ETL, OSHA

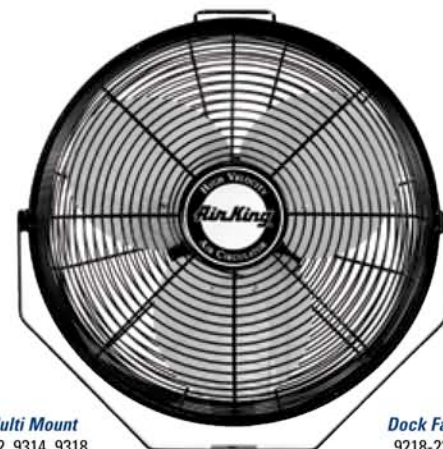

Multi Mount
9312, 9314, 9318

Dock Fan
9218-22

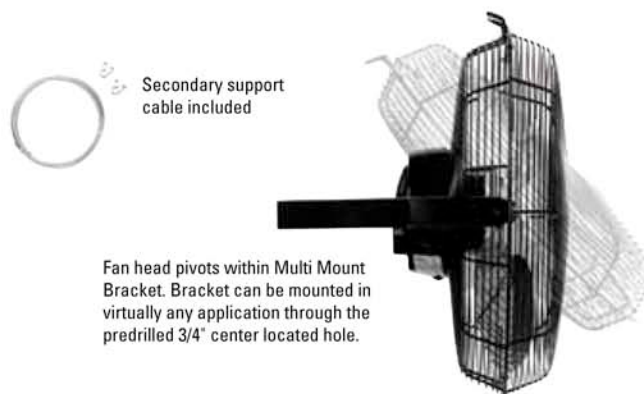

Fan head pivots within Multi Mount Bracket. Bracket can be mounted in virtually any application through the predrilled 3/4" center located hole.

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9318	18" Multi Mount Fan	18"	21.5"L x 16"W x 21"H	21.4	2.85	\$150.00
9218-22	18" Dock Fan		21.5"L x 16"W x 21"H	21.4	2.85	\$160.00
9314	14" Multi Mount Fan	14"	18"L x 8.88"W x 18.25"H	14.3	1.85	\$132.00
9312	12" Multi Mount Fan	12"	15"L x 12"W x 15"H	11.5	1.39	\$115.00

PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
18" 1/6 HP ⁶	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
14" 1/20 HP ⁷	1650	1470	1180	1498	1296	934	.58	.50	.44	63	56	48	58	55	48
12" 1/25 HP ⁸	1360	1170	1010	1545	1205	900	.77	.63	.53	85	76	64	56	49	42

⁶ Includes models 9318, 9218PBC, 9218-22 • ⁷ Includes model 9314 • ⁸ Includes model 9312
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL GRADE FLOOR FANS

Ideal for use in offices, stores, garages, warehouses and any other industrial space that needs powerful air circulation.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9224, 9230)

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9220, 9218, 9219)

3-speed, 1/25 HP, 120V, 1 phase, open motor, sleeve bearing, permanent split capacitor (model 9212)

Controls

Rear mounted rotary switch

Power Cord

Black, 10', 3-conductor, SJT type (models 9224, 9230)

Black, 9', 3-conductor, SJT type (models 9220, 9218, 9219, 9212)

Coating

Blade, Guard, and Mounts are powder coated steel



Compliance

ETL, OSHA


Height

Adjustments of 26" and 28" (model 9219)

Roll-About Stand w/Fan
9219

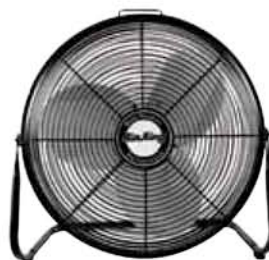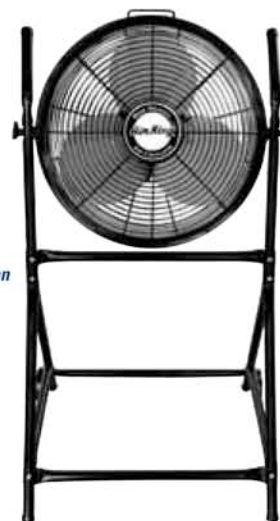

Pivoting Floor Fan
9220, 9218, 9212



Pivoting Floor Fan
9230, 9224

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9230	30" Pivoting Floor Fan	30"	33.75"L x 12.25"W x 35.5"H	48.3	8.63	\$308.00
9224	24" Pivoting Floor Fan	24"	27"L x 12"W x 28.75"H	41.8	5.69	\$280.00
9220	20" Pivoting Floor Fan	20"	25.75"L x 12.5"W x 25"H	24.0	4.46	\$150.00
9219	18" Roll-About Stand w/Fan	18"	24"L x 25"W x 48"H	27.9	4.44	\$178.00
9218	18" Pivoting Floor Fan		22"L x 9.69"W x 22"H	21.4	3.17	\$143.00
9212	12" Pivoting Floor Fan	12"	15.5"L x 8.5"W x 16.5"H	12.1	1.43	\$104.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9230	30" 1/4 HP	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9224	24" 1/4 HP	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9220	20" 1/6 HP	3670	3330	2940	1500	1310	1050	1.60	1.30	1.10	184	155	130	62	55	48
9219	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9218	18" 1/6 HP	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9212	12" 1/25 HP	1360	1170	1010	1500	1200	900	.77	.63	.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



GOVERNMENT FANS

Air King's government fans are perfect for use on military bases or in government buildings.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 60 Hz, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9130G, 9135G, 9125G)

3-speed, 1/20 HP, 120V, 60 Hz, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9214G)

3-speed, 1/20 HP, 120V, 60 Hz, 1 phase, permanently lubricated, permanent split capacitor (model 3151G)

3-speed, 1/50 HP, 120V, 60 Hz, 1 phase, permanently lubricated (model 3150G)

Installation

Class A or B, NEMA Standard number MG-1

Power Cord

Black, 10', 3 wire, grounded, North American, SJT type, (models 9130G, 9135G, 9125G)

Black, 9', 3 wire, grounded, North American, SJT type (model 9214)


White, 7', 3 wire, grounded, North American, SPT type (models 3150G, 3151G)

Compliance

Conforms to the requirements of Underwriters Laboratories Inc. (UL) Standard No. UL 507

Guards

Completely enclose the face, perimeter, and reverse side and permit access to blade assembly without special tools.

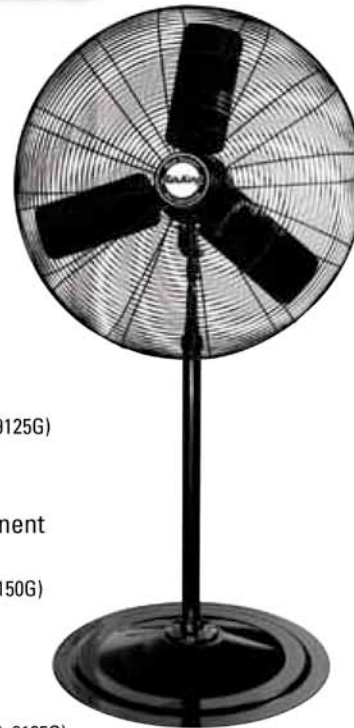

Pedestal Fans
9130G, 9135G, 9125G

Base is suitable for floor use and will not move when fan is operated at high speed



Floor Fan
9214




Table Fan
3130G, 3151G

Base is suitable for table, floor, or wall mounting and will not move when fan is operated at high speed

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9130G	30" Pedestal Fan	30"	33.5"L x 29"W x 90"H	80.0	6.03	\$420.00
9135G	30" Oscillating Pedestal Fan		33.5"L x 29"W x 90"H	82.6	6.03	\$440.00
9125G	24" Oscillating Pedestal Fan	24"	27"L x 29"W x 88"H	76.1	8.26	\$417.50
9214GT	14" Floor Fan	14"	18.69"L x 9"W x 18"H	13.6	1.98	\$140.00
3150G	12" Oscillating Table/Wall Mount Fan	16"	11.63"L x 14.25"W x 20.25"H	8.0	1.46	\$65.00
3151G	16" Oscillating Table/Wall Mount Fan	12"	10.75"L x 18"W x 24.38"H	11.0	2.37	\$72.50

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9130G	30" 1/4 HP	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9135G	30" 1/4 HP	7400	6360	4980	1110	975	822	2.04	1.81	1.60	234	206	176	75	71	67
9125G	20" 1/6 HP	5130	4490	3670	1500	1250	1000	2.03	1.81	1.63	229	200	176	72	69	64
9214	18" 1/6 HP	1650	1470	1180	1498	1296	934	.58	.50	.44	63	56	48	58	55	48
3150G	18" 1/6 HP	930	780	620	1450	1300	1090	.34	.30	.27	39	35	32	45	41	36
3151G	14" 1/20 HP	1710	1500	1330	1545	1394	1244	.71	.54	.48	77	65	57	53	49	44

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



WINDOW FANS

These reversible Window Fans with our exclusive Storm™ Guard feature are available in sizes to fit virtually any window.

PRODUCT INFORMATION

Motor

3-speed, 1/6 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9166)

3-speed, 1/6 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9155)

Controls

Front mounted rotary switch

Power Cord

Black, 7', 3-conductor, SPT-2-R type (model 9166)

White, 7', 3-conductor, SPT-2-R type (model 9155)

Construction

Impact resistant plastic housing, powder coated steel front grill and blade (model 9166)

High impact styrene housing, ABS plastic blade, and metal front grill (model 9155)

Compliance

ETL, OSHA

Window Size Required

27" to 38" x 26.25"H (model 9166)

26.5" to 34.5" x 22"H (model 9155)



Whole House
Window Fan
9166



Window Fan
9155

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9166	20" Whole House Window Fan	20"	26.75"L x 11.25"W x 26.25"H	36.0	5.42	\$252.00
9155	16" Window Fan	16"	26.5"L x 8.25"W x 22"H	15.0	3.31	\$150.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9166	20" 1/6 HP	3560	3120	2510	1600	1450	1100	1.40	1.20	1.0	170	145	115	64	57	50
9155	16" 1/6 HP	2470	1700	1360	1370	1140	855	.83	.55	.45	90	65	52	64	50	47

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



CEILING FANS

Ideal for circulating hot air that accumulates at the top of buildings.

PRODUCT INFORMATION

Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

Controls

3-speed, wall control switch, downdraft only

Mounting

Included 16" white downrod

Additional downrod lengths available separately:

DRW2 - 24" white downrod

DRW3 - 36" white downrod

DRW4 - 48" white downrod

DRW5 - 60" white downrod

DRW6 - 72" white downrod



Construction

Powder coated steel, 3 blade

Compliance

UL, OSHA



CEILING FAN SQUARE FOOTAGE

CEILING HEIGHT	FAN DIAMETER (INCHES)	
	56	48
15	1800	1322
17	1663	1222
18	1604	1178
20	1500	1102
25	1315	966
30	1200	882

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9856	56" Industrial Grade Ceiling Fan	56"	56"L x 56"W x 21.5"H	15.3	1.25	\$100.00
9848	48" Industrial Grade Ceiling Fan	48"	48"L x 48"W x 21.5"H	14.5	1.06	\$98.00

PERFORMANCE

MODEL	TYPE	RPM			AMPS			WATTS		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9856	56" 1/4 HP	287	205	130	.68	.54	.39	81	50	26
9848	48" 1/4 HP	316	198	124	.67	.54	.39	80	51	27

Performance ratings are in accordance with the manufacturer's standards. • Specifications are subject to change.



PIVOTING BLOWERS

Pivoting Blowers are a perfect fit for any job site. The compact size makes them a great fit for tight spaces.

PRODUCT INFORMATION

Motor

3-speed, 1/11 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9960)

3-speed, 1/13 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (models 9566, 9555)

3-speed, 1/16 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor (model 9550)

Controls

Side mounted rotary dial switch

Power Cord

Black, 10', 3-conductor with GFCI, SO type (models 9566, 9555)

Black, 10', 3-conductor, SO type (models 9550, 9960)

Construction

Molded ABS Plastic

Compliance

ETL, OSHA



Pivoting High Velocity Blower
9960



Pivoting High Velocity Blower, Safety Yellow
9566



Pivoting Utility Blower
9550



Pivoting Blower Head allows you to control the direction of the air flow.



Pivoting High Velocity Blower
9555

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9960	Pivoting High Velocity Blower	7.25" x 7.25"	15"L x 12"W x 15.25"H	15.6	1.53	\$225.00
9566	Pivoting High Velocity Blower, Safety Yellow	7" x 7"	13"L x 11"W x 14.25"H	12.75	1.59	\$188.00
9555	Pivoting High Velocity Blower	7" x 7"	13"L x 11"W x 14.25"H	12.75	1.59	\$180.00
9550	Pivoting Utility Blower	6" x 6"	11.5"L x 9.25"W x 11.25"H	10.1	.91	\$120.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9960	7.25" 1/11 HP	425	370	330	1365	1250	1100	1.10	.95	.80	130	110	95	78	74	70
9566, 9555	7" 1/13 HP	350	300	250	1442	1297	1143	.94	.78	.70	108	94	84	77	73	69
9550	6" 1/16 HP	310	260	190	1475	1275	950	.80	.62	.50	90	74	58	60	59	53

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL GRADE BOX FANS

Air King box fans are perfect for shops, dormitories, offices, homes and other locations in need of high volume air movement.

PRODUCT INFORMATION

Motor

3-speed, 1/25 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor

Controls

Top mounted rotary switch

Power Cord

White, 8', 3-conductor, SPT-2-R type

Construction

Steel body with impact resistant plastic grills and chemical resistant polypropylene blade

Compliance

ETL, OSHA


Height

Adjustments of 26" or 28" (model 9701)

Model 9701 Roll-About fits model 9723 Box Fan. Fan is NOT INCLUDED with stand.



Roll-About Stand
9701

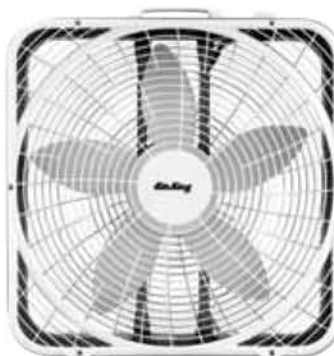

Box Fan
9723

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9723	20" Box Fan	20"	24"L x 6.38"W x 23.63"H	12.8	1.93	\$58.00
9701	Roll-About Stand (Fan NOT included)	N/A	24"L x 20"W x 47"H	6.2	.28	\$50.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9723	20" 1/25 HP	2220	1920	1530	955	785	645	1.82	1.30	1.00	166	117	87	62	57	53

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL GRADE OSCILLATING FANS

*Ideal for workshops, health clubs, stores, classrooms, offices
and other areas where there is limited floor/table space.*

PRODUCT INFORMATION

Motor

3-speed, 1/20 HP, 120V, 1 phase, permanently lubricated,
permanent split capacitor (models 9126, 9119, 9215)

Controls

Rear mounted rotary switch (models 9126, 9119)

Push button with remote control (model 9215)

Power Cord

White, 7', 3-conductor, SPT-2-R type (models 9119, 9126)

Black, 8', 3-conductor, SPT-2-R type (model 9215)

Construction

Metal front grill with impact resistant plastic rear grill and
chemical resistant polypropylene blade (models 9126, 9119)

Impact resistant plastic grills with chemical resistant
polypropylene blade (model 9215)

Compliance

ETL, OSHA


Height

Adjustable from 37" to 53.75" (model 9119)

Adjustable from 36" to 52" (model 9126)

Oscillation

90° or can be locked in non-oscillating position

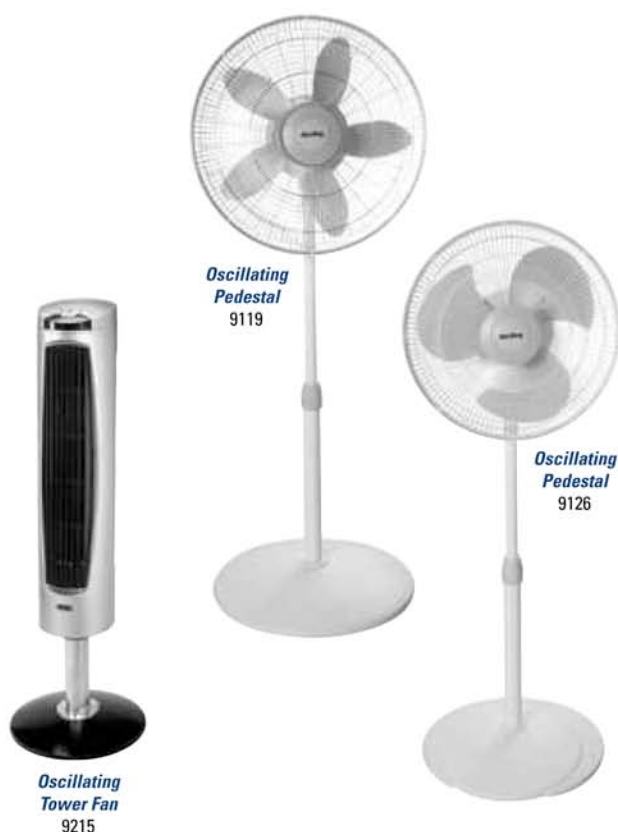

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9215	Tower Fan	3.5" x 21"	12.5"L x 12.25"W x 40"H	12.0	1.42	\$140.00
9119	18" Oscillating Pedestal Fan	18"	20.25"L x 20.25"W x 53.75"H	13.8	2.15	\$80.00
9126	16" Oscillating Pedestal Fan	16"	18"L x 18"W x 52"H	11.3	1.30	\$78.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9215	3.25" x 21" 1/20 HP	715*	580*	455*	1400	1140	875	.36	.30	.25	43	35	30	45	39	33
9119	18" 1/20 HP	1970	1520	1170	1000	790	590	1.10	.73	.54	114	85	63	55	52	50
9126	16" 1/20 HP	1710	1500	1330	1545	1394	1244	.71	.54	.48	77	65	57	53	49	44

*The performance ratings are measured in Feet Per Minute (FPM) not Cubic Feet Per Minute (CFM) and are recorded at a distance of 4'.
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL GRADE OSCILLATING FANS

Ideal for use in offices, hospitals, schools and any other area where quiet operation is desirable.

PRODUCT INFORMATION

Motor

3-speed, 1/20 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9106, 9018, 9016)

Energy Efficient, 3-speed, 1/15 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9046)

3-speed, 1/50 HP, 120V, 1 phase, permanently lubricated (models 9012, 9102)

2-speed, 1/100 HP, 120V, 1 phase, permanently lubricated (model 9154)

Controls

Front mounted rotary and pull cord switch (models 9018, 9016, 9012)

Push button, Remote Control, and a 7.5 hour timer (model 9046)

3-speed, rotary switch (models 9106, 9102)

2-speed, rotary switch (model 9154)

Power Cord

White, 7', 3-conductor, SPT-2-R type

Construction


Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade

Compliance

ETL, OSHA

Oscillation

90° or can be locked in non-oscillating position

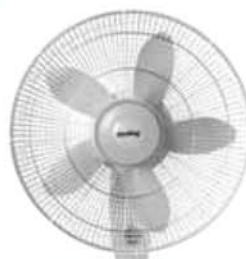

Oscillating Wall Mount
9018



Oscillating Wall Mount with
Remote Control and Timer
9046



Oscillating Wall Mount
9016, 9012



Oscillating Table Fan
9106



Oscillating Table Fan
9102



Oscillating Table Fan
9154

SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9018	18" Oscillating Wall Mount Fan	18"	20.25"L x 15.5"W x 23"H	10.9	2.28	\$88.00
9046	16" Oscillating Wall Mount Fan with Remote Control	16"	18"L x 13"W x 18"H	8.4	1.71	\$128.00
9016	16" Oscillating Wall Mount Fan	16"	18"L x 14.38"W x 22.63"H	10.5	1.71	\$78.00
9012	12" Oscillating Wall Mount Fan	12"	15.63"L x 14.25"W x 20.75"H	8.3	1.41	\$70.00
9106	16" Oscillating Table Fan	16"	10.75"L x 18"W x 24.38"H	9.8	2.37	\$66.00
9102	12" Oscillating Table Fan	12"	11.63"L x 14.25"W x 20.25"H	7.0	1.46	\$56.00
9154	9" Oscillating Table Fan	9"	8.13"L x 11.31"W x 16.88"H	4.0	.60	\$50.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9018	18" 1/20 HP	1970	1520	1170	1000	790	590	1.10	.73	.54	114	85	63	55	52	50
9046	16" 1/15 HP	1480	1340	1140	1275	1180	1040	.40	.36	.32	50	43	37	44	39	34
9106, 9016	16" 1/20 HP	1710	1500	1330	1545	1394	1244	.71	.54	.48	77	65	57	53	49	44
9102, 9012	12" 1/50 HP	930	780	620	1450	1300	1090	.40	.30	.27	39	35	32	45	41	36
9154	9" 1/100 HP	490	-	410	2449	-	1883	.57	-	.39	37	-	27	48	-	37

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL GRADE PIVOTING and OFFICE FANS

Ideal for use in offices, production lines, kitchens, beauty salons, toll booths, stores and anywhere else space is limited.

PRODUCT INFORMATION

Motor

3-speed, 1/22 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9500)

3-speed, 1/25 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9515)

3-speed, 1/50 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9530)

2-speed, 1/100 HP, 120V, 1 phase, permanently lubricated (model 9525)

2-speed, 1/300 HP, 120V, 1 phase, permanently lubricated (models 9145, 9146)

Controls

3-speed, rear mounted rotary switch (models 9500, 9515, 9530)

2-speed, rear mounted rotary switch (models 9525, 9145, 9146)

Power Cord

Black, 6', 3-conductor, SPT-2-R type (model 9500)

Black, 6', 3-conductor, SPT-2-R type (models 9515, 9530)

White, 6', 3-conductor, SPT-2-R type (model 9525)

White, 7', 3-conductor, SPT-2-R type (models 9145, 9146)

Construction

Impact resistant plastic with chemical resistant polypropylene blade (models 9500, 9515, 9530, 9525)

Zinc plated steel front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade (models 9145, 9146)

Compliance

ETL, OSHA

Pivot Fan
9500



Pivot Fan
9515



Pivot Fan
9530



Pivot Fan
9525



Clip-On Fan
9145



Personal Fan
9146



SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9500	20" Deluxe Pivot Fan	20"	23.75"L x 7"W x 23.38"H	12.4	2.20	\$68.00
9515	15" Deluxe Pivot Fan	15"	19.38"L x 7.38"W x 20.63"H	8.8	1.83	\$66.00
9530	9" High Performance Pivot Fan	9"	13"L x 6.5"W x 13.25"H	4.4	.71	\$44.00
9525	9" Pivot Fan		13.5"L x 6"W x 13"H	4.1	.73	\$44.00
9145	6" Clip-On Fan	6"	8.13"L x 6.25"W x 10.38"H	2.1	.27	\$26.00
9146	6" Personal Fan		8.13"L x 6.25"W x 10.38"H	2.1	.27	\$24.00

PERFORMANCE

MODEL	TYPE	CFM			RPM			AMPS			WATTS			DB A		
		HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9500	20" 1/22 HP	2390	1975	1490	960	765	565	1.00	.73	.54	109	88	64	63	59	50
9515	15" 1/25 HP	1700	1400	1070	1050	875	650	1.10	.75	.60	119	90	65	55	50	44
9530	9" 1/50 HP	700	610	520	2100	1800	1500	.50	.43	.37	58	51	45	54	50	46
9525	9" 1/100 HP	430	-	340	2449	-	1883	.57	-	.39	37	-	27	48	-	37
9145, 9146	6" 1/300 HP	190	-	90	2020	-	1740	.19	-	.15	12	-	9	37	-	34

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



PORTABLE ELECTRIC HEATERS

Perfect for adding warmth to office buildings, break rooms and other enclosed areas needing supplemental heat.

PRODUCT INFORMATION

Controls

2 comfort settings - High Heat, Low Heat, Auto (Thermostat Controlled), with remote control (models 8566, 8365, 8132)

3 comfort settings - High Heat, Low Heat, Fan Only (models 8900, 8945)

2 comfort settings - High Heat, Low Heat (model 8605)

Thermostat

Programmable with 8 hour timer (model 8566)

Programmable with 7 hour timer (model 8132)

Adjustable with 8 hour timer (model 8365)

Adjustable (models 8900, 8605, 8945)

Power Cord

Black, 6', 3-conductor, HPM type

Construction

Metal with UL approved plastic

Compliance

ETL, OSHA

Oscillating Ceramic Heater
8566



Oscillating Ceramic Heater
8132



Deluxe Pedestal Ceramic Heater
8365



Low Profile Die-Cast Heater
8605



Pivoting Utility Ceramic Heater
8900



Ceramic Heater
8945



SPECIFICATIONS

MODEL	DESCRIPTION	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
8566	Oscillating Ceramic Heater with Remote Control	7.25"L x 9.25"W x 34"H	10.0	1.57	\$150.00
8132	Oscillating Ceramic Heater with Remote Control	9"L x 6"W x 13"H	8.5	.89	\$120.00
8365	Deluxe Pedestal Ceramic Heater	12"L x 12"W x 30"H	12.3	1.57	\$130.00
8900	Pivoting Utility Ceramic Heater	11.55"L x 11.98"W x 12.1"H	10.0	1.03	\$102.00
8945	Ceramic Heater	8.75"L x 6.8"W x 11.25"H	4.6	.51	\$74.00
8605	Low Profile Die-Cast Heater	30.5"L x 6.5"W x 10.75"H	11.5	1.71	\$100.00

PERFORMANCE

TYPE	BTU			AMPS			WATTS		
	HIGH	LOW	FAN	HIGH	LOW	FAN	HIGH	LOW	FAN
Ceramic Heaters	5118	3070	0	12.5	7.0	.29	1500	900	33.4
Die-Cast Heater	5118	2559	-	12.5	6.55	-	1500	750	-

Specifications are subject to change.



Model	Description	UPC	Page
Industrial Grade Drum Fans			
9942TS	1/2 HP 42" Drum Fan w/Swivel Stand	0-46013-30319-6	3
9942D	1/2 HP 42" Belt Drive Drum Fan	0-46013-30310-3	3
9242TS	1/2 HP 42" Drum Fan w/Swivel Stand	0-46013-30316-5	3
9936TS	1/2 HP 36" Drum Fan w/Swivel Stand	0-46013-30318-9	3
9936D	1/3 HP 36" Belt Drive Drum Fan	0-46013-30309-7	3
9236TS	1/3 HP 36" Drum Fan w/Swivel Stand	0-46013-30315-8	3
9236D	1/3 HP 36" Direct Drive Drum Fan	0-46013-30301-1	3
Industrial Grade Quiet Fans			
99532	30" Quiet, Oscillating Pedestal Fan	0-46013-39565-8	4
99533	24" Quiet, Oscillating Pedestal Fan	0-46013-39515-3	4
99538	30" Quiet, Oscillating Wall Mount Fan	0-46013-39555-9	5
99539	24" Quiet, Oscillating Wall Mount Fan	0-46013-39495-8	5
1/3 HP Industrial Grade Fan Components			
9170H	30" Assembled Fan Head	0-46013-38740-0	6
9175H	30" Oscillating Assembled Fan Head	0-46013-38730-1	6
9171H	24" Assembled Fan Head	0-46013-38720-2	6
9174H	24" Oscillating Assembled Fan Head	0-46013-38710-3	6
9100PB	Pedestal Base and Pole	0-46013-39620-4	6
9100WC	Wall Mount	0-46013-39630-3	6
9100CM	Ceiling Mount	0-46013-38700-4	6
9100i	I-Beam Mount	0-46013-39640-2	6
9100WB	Wheel Kit	0-46013-39590-0	6
1/3 HP Industrial Grade Fans			
9170	30" Pedestal Fan	0-46013-38990-9	7
9175	30" Oscillating Pedestal Fan	0-46013-38960-2	7
9171	24" Pedestal Fan	0-46013-38980-0	7
9174	24" Oscillating Pedestal Fan	0-46013-38970-1	7
9070	30" Wall Mount Fan	0-46013-38940-4	7
9075	30" Oscillating Wall Mount Fan	0-46013-38920-6	7
9071	24" Wall Mount Fan	0-46013-38950-3	7
9074	24" Oscillating Wall Mount Fan	0-46013-38930-5	7
9370	30" Ceiling Mount Fan	0-46013-38900-8	7
9375	30" Oscillating Ceiling Mount Fan	0-46013-38880-3	7
9371	24" Ceiling Mount Fan	0-46013-38910-7	7
9374	24" Oscillating Ceiling Mount Fan	0-46013-38890-2	7
9670	30" I-Beam Mount Fan	0-46013-38860-5	7
9675	30" Oscillating I-Beam Mount Fan	0-46013-38840-7	7
9671	24" I-Beam Mount Fan	0-46013-38870-4	7
9674	24" Oscillating I-Beam Mount Fan	0-46013-38850-6	7

Specifications are subject to change.

Model	Description	UPC	Page
1/4 HP Industrial Grade Fan Components			
9130H	30" Assembled Fan Head	0-46013-39600-6	8
9135H	30" Oscillating Assembled Fan Head	0-46013-39730-0	8
9124H	24" Assembled Fan Head	0-46013-39610-5	8
9125H	24" Oscillating Assembled Fan Head	0-46013-39740-9	8
9120H	20" Assembled Fan Head	0-46013-38750-9	8
9121H	20" Oscillating Assembled Fan Head	0-46013-38690-8	8
9100PB	Pedestal Base and Pole	0-46013-39620-4	8
9100WC	Wall Mount	0-46013-39630-3	8
9100CM	Ceiling Mount	0-46013-38700-4	8
9100i	I-Beam Mount	0-46013-39640-2	8
9100WB	Wheel Kit	0-46013-39590-0	8
1/4 HP Industrial Grade Fans			
9130	30" Pedestal Fan	0-46013-11780-9	9
9135	30" Oscillating Pedestal Fan	0-46013-39560-3	9
9124	24" Pedestal Fan	0-46013-39500-9	9
9125	24" Oscillating Pedestal Fan	0-46013-39510-8	9
9030	30" Wall Mount Fan	0-46013-39350-0	9
9035	30" Oscillating Wall Mount Fan	0-46013-39550-4	9
9024	24" Wall Mount Fan	0-46013-39480-4	9
9025	24" Oscillating Wall Mount Fan	0-46013-39490-3	9
9330	30" Ceiling Mount Fan	0-46013-38800-1	9
9335	30" Oscillating Ceiling Mount Fan	0-46013-38780-6	9
9724	24" Ceiling Mount Fan	0-46013-38810-0	9
9325	24" Oscillating Ceiling Mount Fan	0-46013-38790-5	9
9430	30" I-Beam Mount Fan	0-46013-39670-9	9
9635	30" Oscillating I-Beam Mount Fan	0-46013-38760-8	9
9424	24" I-Beam Mount Fan	0-46013-39690-7	9
9625	24" Oscillating I-Beam Mount Fan	0-46013-38770-7	9
20" and 18" Industrial Grade Fans			
9420	1/6 HP 20" Pedestal Fan	0-46013-39290-9	10
9020	1/6 HP 20" Wall Mount Fan	0-46013-39340-1	10
9320	1/6 HP 20" Ceiling Mount Fan	0-46013-38820-9	10
9520	1/6 HP 20" I-Beam Mount Fan	0-46013-39650-1	10
9418	1/6 HP 18" Pedestal Fan	0-46013-39680-8	10
9518	1/6 HP 18" Wall Mount Fan	0-46013-39660-0	10
9718	1/6 HP 18" Ceiling Mount Fan	0-46013-38830-8	10
9618	1/6 HP 18" I-Beam Mount Fan	0-46013-39700-3	10



Model	Description	UPC	Page
Industrial Grade Multi Mount and Dock Fans			
9318	1/6 HP 18" Multi Mount Fan	0-46013-39470-5	11
9218PBC	1/6 HP 18" Dock Fan	0-46013-43630-6	11
9218-22	1/6 HP 18" Dock Fan	0-46013-39390-6	11
9314	1/20 HP 14" Multi Mount Fan	0-46013-39720-1	11
9312	1/25 HP 12" Multi Mount Fan	0-46013-39460-6	11
Industrial Grade Floor Fans			
9230	1/4 HP 30" Floor Fan	0-46013-39570-2	12
9224	1/4 HP 24" Floor Fan	0-46013-39520-7	12
9220	1/6 HP 20" Floor Fan	0-46013-39300-5	12
9219	1/6 HP 18" Roll-About Stand Fan	0-46013-39190-2	12
9218	1/6 HP 18" Floor Fan	0-46013-39170-4	12
9212	1/25 HP 12" Floor Fan	0-46013-39160-5	12
Government Fans			
9130G	30" Pedestal Fan	0-46013-11750-2	13
9135G	30" Oscillating Pedestal Fan	0-46013-38200-9	13
9125G	24" Oscillating Pedestal Fan	0-46013-38190-3	13
9214	1/20 HP 14" Floor Fan	0-46013-39710-2	13
3150G	12" Oscillating Table/Wall Mount Fan	0-46013-32200-5	13
3151G	16" Oscillating Table/Wall Mount Fan	0-46013-32210-4	13
Window Fans			
9166	20" Whole House Window Fan	0-46013-38020-3	14
9155	16" Window Fan	0-46013-38010-4	14
Ceiling Fans			
9856	56" 3-Speed Ceiling Fan	0-83162-37189-8	15
9848	48" 3-Speed Ceiling Fan	0-83162-37089-1	15
Pivoting Blowers			
9960	Pivoting High Velocity Blower	0-46013-37897-2	16
9566	Pivoting High Velocity Blower, Yellow	0-46013-37894-1	16
9555	Pivoting High Velocity Blower	0-46013-43620-7	16
9550	Pivoting Utility Blower	0-46013-39840-6	16
Box Fan and Roll-About Stand			
9723	20" Box Fan	0-46013-39110-0	17
9701	Roll-About Stand	0-46013-39100-1	17

Specifications are subject to change.

Model	Description	UPC	Page
Oscillating Tower Fan			
9215	Oscillating Tower Fan	0-46013-39970-0	18
Commercial Grade Oscillating Fans			
9119	18" Oscillating Pedestal Fan	0-46013-39080-6	18
9126	16" Oscillating Pedestal Fan	0-46013-39070-7	18
9018	18" Oscillating Wall Mount Fan	0-46013-39090-5	19
9046	16" Oscillating Wall Mount Fan	0-46013-37889-7	19
9016	16" Oscillating Wall Mount Fan	0-46013-33270-7	19
9012	12" Oscillating Wall Mount Fan	0-46013-33260-8	19
9106	16" Oscillating Table Fan	0-46013-38120-0	19
9102	12" Oscillating Table Fan	0-46013-38110-1	19
9154	9" Oscillating Table Fan	0-46013-39060-8	19
Pivot and Office Fans			
9500	20" Deluxe Pivot Fan	0-46013-39120-9	20
9515	15" Deluxe Pivot Fan	0-46013-39180-3	20
9530	9" High Performance Pivot Fan	0-46013-39320-3	20
9525	9" Pivot Fan	0-46013-39140-7	20
9145	6" Clip-On Fan	0-46013-38030-2	20
9146	6" Personal Fan	0-46013-38040-1	20
Portable Electric Ceramic Heaters			
8566	Oscillating Ceramic Heater	0-46013-76087-6	21
8132	Oscillating Ceramic Heater	0-46013-76086-9	21
8365	Deluxe Pedestal Ceramic Heater	0-46013-38650-2	21
8900	Pivoting Utility Ceramic Heater	0-46013-38660-1	21
8945	Ceramic Heater	0-46013-76301-3	21
8605	Low Profile Die-Cast Heater	0-46013-75072-3	21





For additional information regarding our industrial and commercial air circulators or any of our other full lines of exhaust fans, range hoods, central vacuums, ceiling fans, door entry chimes, or humidifiers please feel free to contact us:

REWilliams
CONTRACTOR INCORPORATED

29021 Ave Sherman STE 103, Valencia, CA 91355

E-Mail: customerservice@rewci.net

Toll Free: 1-888-845-6597 • Direct: 1-661-775-5979 • Fax: 1-661-775-9528

www.rewci.com



Printed on recycled, chlorine-free papers using zero VOC solvents and soy/vegetable based inks.