

# Propane Heater Installation Manual

# Table of Contents

<b>Important Safety Information.....</b>	<b>ii</b>
<b>1) Description of Heater.....</b>	<b>1</b>
General information about your heater including specifications	
<b>2) Quick Start Guide.....</b>	<b>2</b>
Basic instructions for using your heater	
<b>3) Service Instructions.....</b>	<b>7</b>
Recommendations on maintaining your heater	
<b>4) Troubleshooting Guide.....</b>	<b>8</b>
Detailed guide to help you diagnose and fix problems fast	
<b>5) Installation Instructions.....</b>	<b>11</b>
How to install and setup the HC heater.	
<b>Parts List.....</b>	<b>A1</b>
<b>Wiring Diagram.....</b>	<b>B1</b>

Revision B – Valid for models beginning with Serial # 2424

## Safety Information

The heater you have purchased was designed, first of all, to be safe. However, since this heater burns propane and uses electricity, safety precautions are necessary for the safe and reliable operation of this product. Throughout this manual, this important safety information will be highlighted in red.

### **Warning: Use Propane Only**

This heater is designed to operate on propane only. Do not attempt to use anything else as fuel since fire or explosion may result.

Use this heater only with regulators and tanks that provide propane vapor at 11 inches of water column.

### **Warning: Do Not Bypass or Substitute Safety Equipment**

Always use the regulator and excess flow valve supplied with the heater or a replacement that complies with Department of Transportation safety regulations.

### **Warning: Exhaust Gases**

It is highly recommended that you use a carbon monoxide detector whenever people are regularly in the space heated by this heater. Although this heater's exhaust is completely isolated from the inside air making it extremely unlikely that any carbon monoxide will enter the inside air, a carbon monoxide detector is a necessary but inexpensive way to add another layer of safety.

### **Warning: Electrical Safety**

Always disconnect power from the heater when performing maintenance or inspection.

**As always, apply common sense. If you're not absolutely sure it's safe then don't do it.**

## Description of Heater

The HC heater you have purchased is a thermostatically controlled propane heater. It is designed to be mounted on the inside of the cab on heavy equipment or inside a small building.

It is a heavy duty forced air heater with electronic ignition. To maximize safety, the combustion air is completely separate from the inside air. The combustion air is drawn from outside, burnt with propane, heat is pulled from it to warm the inside air, and the exhaust exits outside.

### Specifications

Dimensions.....	16 in wide x 11.5 in tall x 8 in deep
Weight.....	27 lbs
Shipping Weight.....	32 lbs
Rating.....	19,000 BTU
Combustion Air Inlet Diameter.....	2 in
Exhaust Outlet.....	1.5 in steel pipe
Hot Air Outlet Diameter.....	6 in
Rated Voltage.....	12 V
Operating Voltage Range (with heater running).....	11.5-13.5 V
Average Current Draw.....	3 amps
Fuel Requirement.....	propane (LP gas)
Fuel Consumption.....	0.8 lbs/hr max

## Quick Start Guide

### Attention

The switch on the side of the heater should not be used to turn off the heater when it is blowing warm air as this will significantly shorten the life of some parts in the heater. Instead, this switch is designed as a emergency shutoff and to shut down the heater if it will not be used for long periods of time. Please turn down the thermostat to turn off the unit during normal operation.

Please read the previous page of important safety information if you haven't already done so.

This guide assumes the heater has already been installed. For installation instruction please go to chapter 5 (page 11).

### For Instructions


**Before Running the Heater for the First Time .....See Below**

**On Running the Heater for the First Time.....See Page 5**

**On Running the Heater.....See Page 6**

### Before Running the Heater the First Time


Please take a moment to familiarize yourself with your heater. The cover to the heater is attached with six bolts as shown in Illustration 1 below.

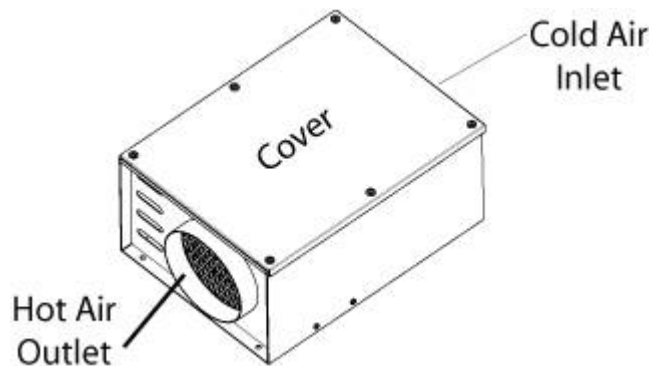

**Illustration 1: Overall View of Heater**

The combustion air enters in an opening on the bottom of the lower left of the heater. It is combined with propane and burnt in the burner, travels through the heat exchanger , and exits

outside through the combustion air outlet on the bottom heater. The inside air is blown over the heater exchanger by the fan, where it captures the heat produced by the burning propane. This is illustrated below.

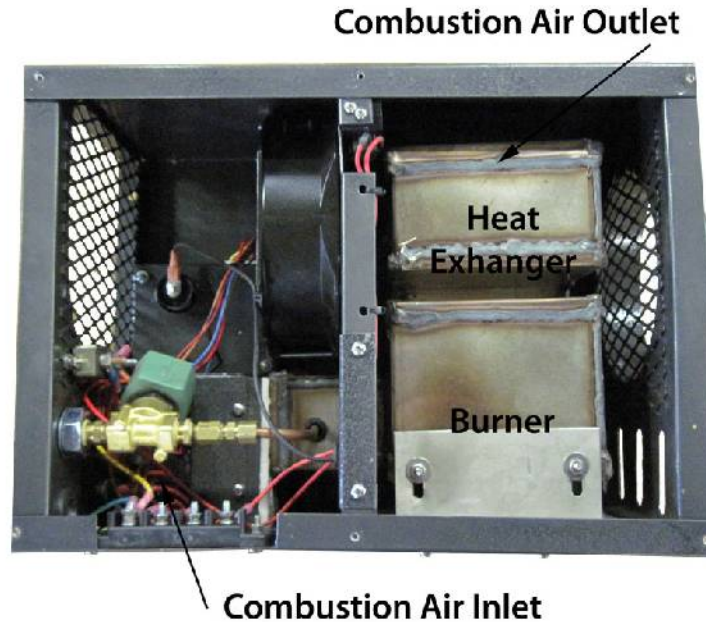

**Illustration 2: Inside of HC Heater**

Near the heater, you will see a thermostat. Please consult the manual that came for the thermostat for instruction on how to operate it.

A switch, a green indicator light, and a red indicator light are located on the side of the heater where the gas and the power enter the heater. The switch operates as a emergency off switch; it disconnects all power to the heater. It should be used when the heater is not needed for an extended period of time and should not be used for shutting off the heater when it is running or for day to day operation. For day to day operation, the thermostat should be used instead since it will allow the heater to safely cool down. The green indicator lights is on when there is power to the heater and the internal circuit breaker has not tripped. The red indicator light is on when the safety system has checked out but the heater is either waiting to light or unable to light.

### **Normal Operation for Heater**

When the switch on the heater is off, the propane turned on, and the thermostat set to its minimum setting, no lights will be on or fans will be running. When the switch is turned on the green indicator light will come on. If the thermostat is turned up until the heater starts (this will be unnecessary below 20 F), the blower and fan will start and after a short delay the red indicator light will come on. After a 15 to 30 second delay, the gas turns on, the red light turns off, and a faint clicking noise will be heard as the spark module sends a high voltage spark to the spark probe. The heater will attempt to light for approximately 10 seconds. If the heater lights, the red light will turn off. If not, the red light will turn back on and the heater will wait 15 to 30 seconds to try again.

The heater will run until the trailer reaches the temperature set on the thermostat. The gas will turn off but the blower will run for an additional 2 to 3 minutes to cool down the heater.

## **Running the Heater For the First Time or After the Unit Has Been Sitting a Long Time**

Whenever you need to verify that the heater is working properly, please follow the four steps below.

### **1) Check the air inlets and outlets**

Check that the air inlets and outlets are undamaged and unblocked, especially the ones that are outside.

### **2) Check the fuel system**

Check that the propane tank is securely mounted and the gas lines and fittings between the propane tank and the heater are tight and undamaged. Turn on the valve on the propane tank.

### **3) Set the thermostat to the maximum value**

If the temperature is above 80 or 90 degrees, you may not be able to turn the thermostat high enough for the heater to start in the next step. If you wish to continue setting up the heater you will need to chill the thermostat probe.

### **4) Turn on the heater**

The heater will start and, after a few seconds, ignite. The red indicator light near the power switch will turn on until the heater has ignited. You should hear it quietly ignite just after the fan turns on and you will feel the air exiting the heater get warm within a minute. If the heater doesn't ignite after a few minutes (the red indicator light will turn on and stay on), please refer to the troubleshooting guide to help fix the problem.

### **5) Set the thermostat to the desired temperature.**

Your heater is now ready for use.



## **Normal Operation**

### **1) Check the air inlets and outlets**

Check that all the air inlets and outlets are undamaged and unblocked.

### **2) Check propane supply**

Check that the propane tank(s) are securely mounted and contains fuel. Check that the fitting connecting the tank to the gas system is tight. Turn on the valve on the propane tank.

### **3) Set the thermostat**

Set the thermostat to the desired temperature.

### **4) Turn on the heater**

Your heater is now ready for use and will automatically run as necessary to maintain the space at the desired temperature (just like a home furnace.)

### **5) Turning off the heater**

If you need to turn the heater for the night or the weekend, turn off the heater using the thermostat. This guarantees that the heater has time to cool down properly.

If you need to turn the heater off for longer than a few days, turn off the heater using the power switch on the side. It is very important that the heater is not running when you shut off the power. If the heater is running, first turn off the heater using the thermostat, wait until the fan was stopped, and then turn off the heater. Turning off the heater with the power switch while it is running is not inherently dangerous, but it will reduce the life of some of the components inside the heater. Once the heater is turned off, close the valve(s) on the propane tank(s).

## Service Instruction

### Every time you walk by the heater (and at least once a week)

- Check the air inlet and the exhaust outlet for damage or obstructions
- Check the exterior gas lines for damage

### Annually before the start of the winter season

- Carefully inspect the propane tank, regulator, and fuel lines. Replace any damaged components and tighten any loose fittings.
- Clean the air inlet and the exhaust outlet. Remove any debris that has collected during the summer.
- Remove the heater cover. Carefully remove any dust or dirt from the grill and the large fan inside the heater.
- Start up and run the heater for a couple of minutes to check that everything is in working order.
- If you are using a digital thermostat, replace its battery.

### Every three years (or when ignition problems occur)

In addition to the annual maintenance,

- Remove the spark probes and check them for damage and deposits. They should not be darker than a light gray or have an excessively rounded tip. If the spark probes are damaged or excessively rounded, they should be replaced. If the spark probe has deposits then carefully remove them with a damp rag or abrasive plastic pad. Illustration 3 below shows the original condition of the spark probe as a reference. When you reinstall the spark probe always use a high temperature antiseize compound rated for at least 1200F on the threads of the mounting screw and, if necessary, seal the joint between the spark probe and the combustion chamber with a high temperature exhaust or furnace cement rated to at least 900F. Be careful to avoid getting any cement on the mounting screw to allow future removal of the spark probe.



**Illustration 3: Spark Probe as Originally Installed**

## Troubleshooting

If this guide doesn't fix your problem please contact the company where you purchased the heater. If you are unable to contact them or you need additional help, please contact Elston Manufacturing at 1-800-845-1385.

### Warning

For your safety, the propane should always be turned off when troubleshooting this product. Always keep the power to the heater off when working inside the heater.

### What is wrong with the heater?

- A. Heater fails to ignite and fan does not run.
- B. Fan runs but heater fails to ignite.
- C. Heater usually ignites but sometimes does not.
- D. Black smoke from exhaust outlet

### **A** Problem: Heater fails to ignite and the fan never runs.

Turn down the thermostat and turn off power to the heater using the switch.

#### Does the green indicator come on when the power is turned on?

**No.** Check that the heater is receiving power and the positive and ground have not been reversed. If voltage is not detected, do a quick inspection of the electrical system from the heater to the vehicle for obvious problems. If there are no obvious problems, It is recommended that you start at the thermostat and work your way through the components supplying power from the vehicle to the heater until you find the problem. Possible problems include loose connections at terminal bolts, corrosion or mechanical damage to wires, and tripped circuit breakers and blown fuses.

**Yes, but just for a moment.** There is probably a short inside the heater. Check for loose or damaged wires and connections.

**Yes.** If you turn up the thermostat all the way does the red light turn on immediately?

**No** If applicable, check that the thermostat is turned on and set to heat. Check that temperature of the thermostat is set high enough that it will turn on the heater. If the thermostat is a digital model, replace the batteries. If none of these things work, check that +12 volts DC is coming into the thermostat from the heater and there are no loose connections inside the thermostat.

If the thermostat is working correctly, check that the heater is receiving at least 10VDC. The heater needs at least 11 VDC to function correctly but may fail to function completely below 10 VDC.

**Yes** The safety system for the heater does not have the correct initial setup. Check that the flap for the sail switch is not stuck in the open position. If the sail switch is not physically stuck open, check that the resistance across the sail switch is above 1 M $\Omega$  when the heater is off. If the resistance is below this value, the sail switch needs replacement.

---

## **B** Problem: Fan Runs But Heater Fails to Ignite

With the gas off, start the heater by turning up the thermostat to the maximum temperature. The red light should turn on a couple seconds after the fan starts and you should hear a faint clicking noise fifteen to thirty seconds after the blower starts. If you do, then:

**Rule out general problems.** Carefully check the fuel system. Check that the propane tanks contain fuel, all gas lines are undamaged, and all fittings are tight. Check the connections at the thermostat for problems. Remove the cover of the heater and check the wiring for damage or loose connections and the components in the heater for obvious damage. Check that the heater is getting at least 12 VDC.

**Inspect the spark ignition system.** The spark ignition system should create one spark across the tip of the spark probe in the combustion chamber on each faint click. The spark can be in an incorrect location for any of the following reasons: damage to the spark probe wire, loose connections, and deposits on the spark probe. To access the spark probe to check it for deposits, removing the access panel on the side of the heater by the combustion chamber. The metal tips of the spark probe should only be slightly rounded with an 1/8" gap at the tip. In addition, the insulator on the probe should have no cracks or chips missing and only have light deposits on the insulator. If the spark probe is damaged or excessively round, it should be replaced. If the spark probes only has deposits, carefully remove them with a damp rag or abrasive plastic pad.

**The small blower may not be working.** With the gas off, check that air is flowing through the combustion chamber and that the small blower is turning. If it is not working, check for loose connections or obstructions or damage to the blower. If you find nothing obvious, remove the blower and test it at 12 VDC to see if it is functioning correctly.

If the red light does not come on and you don't hear the faint clicking noise then

**The sail switch or high temperature switch may be malfunctioning.** If the sail switch fails to close or the high temperature switch is stuck open the heater will not attempt to ignite. Also loose or damaged wire to either of these items will cause the same problems. Check the wiring to these two items. With the power off to the heater, use a multimeter to check that the resistance of the high temperature switch is less than 1 ohm. If it is higher, it should be replaced. Also, check if the sail switch closes when the heater runs by disconnecting the wiring to the sail switch and checking if the resistance drops to zero when the fan is running. If the wiring and two switches check out ok, refer to the troubleshooting tips above for this problem.

If the red light comes on but you don't hear the faint clicking noise then

**This indicates either a short in high voltage line or a malfunctioning ignition module.** Check the high voltage line for damage. If no problems are found, remove the high voltage wire from the spark probe on the combustion chamber (it can be accessed by removing the access panel on the side of the heater by the combustion chamber). With the

gas off, double check that no spark is being produced by improving a 1/8" spark gap from the end of the high voltage terminal to the combustion chamber. If a spark is being produced, remove and inspect the spark probe. Check and fix any possible shorts, adjust the spark gap to 1/8" if necessary, and reinstall the spark probe. If this does not fix the problem refer to the troubleshooting tips at the start of this problem. If no spark is being produced, the spark ignition module needs to be replaced.

## C

### **Problem: Heater usually ignites but sometimes does not**

Check that the propane tank is not low and gas is getting to the heater.

Is any extra ductwork connected to the exhaust or air inlets or outlets?

**Yes.** The heater should have less than 5 feet connected to the hot air inlet and outlet . Any additional pipe connected to the exhaust should be 1.5-inch or larger pipe less than 2 ft long. Disconnect all ductwork to the heater to see if this corrects the problem.

**No** Carefully check all the inlets and outlets and blower for debris and obstructions. Follow the trouble shooting suggestions for problem B. In addition, use a voltmeter to check if the heater is getting sufficient voltage while it is on. It should be 11.5 to 13.5V for the heater to operate reliably. The heater will operate on 11 to 11.5V but poor ignition and carbon deposits are a possibility.

## D

### **Problem D: Black Smoke from Exhaust Outlet**

Under normal use, the heater will produce very little, if any, black smoke near the exhaust outlet. A white "smoke" of water vapor is normal during cold weather but darker smoke is often the first sign of a problem with the heater and often shows up first when the vehicle powering the heater is not running. These deposits typically indicate that one of the openings in the heater is obstructed or the heater is not receiving enough voltage while it is running.

Check if the heater is running off of the battery only (ie the vehicle is not running). If the battery is significantly run down or running many accessories, the heater cannot receive enough voltage to operate properly. Running the heater for less time on the battery or starting the vehicle should correct the problem.

If this problem occurs when the vehicle is running or after less than an hour of running on the battery, check the following:

- 1) Check that none of the inlets or outlets to the heater are partially blocked or any ductwork leading to or from the heater is damaged.
- 2) Check that the heater is receiving a voltage of at least 11.5 VDC at the thermostat while the blower is running. A voltage below 11.5 VDC typically indicates a problem in the electrical system between the heater and the vehicle. Start by looking for loose or corroded connections.
- 3) Check that the regulator is producing the correct pressure of 10.5-11 inches water column. A high pressure will cause the heater to receive too much propane.

## Installation

**Warning:** Improper installation of this heater creates a substantial safety hazard including the risk of property damage, fire, death.

**Attention:** Compliance with local regulations is the responsibility of the installer. If you are unsure what local regulations require, please refer to the current regulations in your area or speak with the authority having jurisdiction before beginning installation.

### 5.1 Overview

The choices you make in installation have huge effects on the safe and reliable operation of this heater. There are four primary issues to focus on:

1. Safe and robust installation of the propane fuel system
2. Safe and robust installation of the electrical system
3. Secure mounting of all parts against long-term vibration
4. Ensuring adequate and consistent air flow to the heater

The purpose of these instructions is to aid you in installing a fully functional heater that is safe and secure under both normal conditions and, as much as possible, during an accident. However, these instructions are not a substitute for personal knowledge and experience with installing propane and/or electrical systems. Please do not install those areas of the heater unless you have personal knowledge and experience in these areas.

These instructions were written with the latest standards for the US and Canada in mind and are intended to guide you in an installation that meets these standards. At the time of writing, the latest standards were the 2008 edition of NFPA 58, the Liquefied Petroleum Gas Code and the 2005 edition CAN/CSA-B149.5-05, Installation Code for Propane Fuel Systems and Tanks on Highway Vehicles. However, if the regulations that apply in your area conflict with these installation instructions, the local regulations should always be followed instead.

Throughout this guide, the word “must” is used for any instruction that if not followed would create a safety hazard and/or yield an installation that would not comply with current standards. An instruction with the word “should” is necessary either for the proper functioning of the product or improves the long-term safe operation of the product. If you are unable to follow any instructions with the words “must” or “should”, please contact us and/or the authority responsible for regulating or approving your installation to discuss how your installation can be still be completed in a way that is functional, safe, and compliant. Finally, an instruction that recommends indicates an instruction designed to maximize the working life of the product, simplify installation, or improve the appearance of the installed product.

### 5.2 Unpacking the Heater and Gathering Supplies

#### Parts Needed for Installation Included with Heater:

- 1 template for mounting holes

- 6 feet self stick rubber seal
- 1 exhaust flange and gasket


**Additional parts required:**

- 4 1/4" bolts at least 1/2 inch longer than the thickness of the wall the heater is being mounted on with washers, lock washers, and nuts to match.
- Hardware to attach the thermostat and exhaust flange
- Length of 18ga stranded wire
- Brackets and clips for attaching fuel lines, electrical lines, and thermostat probe to the trailer walls
- Propane fuel system including tanks, tank holders, and propane hoses

**5.3 Heater placement:**

The heater should be located where it is not in the way of normal traffic and, if possible, with enough clearance to remove the cover to the heater and the access panel for the spark probe without unbolting the heater. If you are unable to mount the heater in a position that the on/off switch and indicator lights are easily accessible, a remote box is available as an accessory.

The heater must be mounted in one the orientations shown below with plenty of room for the air to enter and leave the heater.

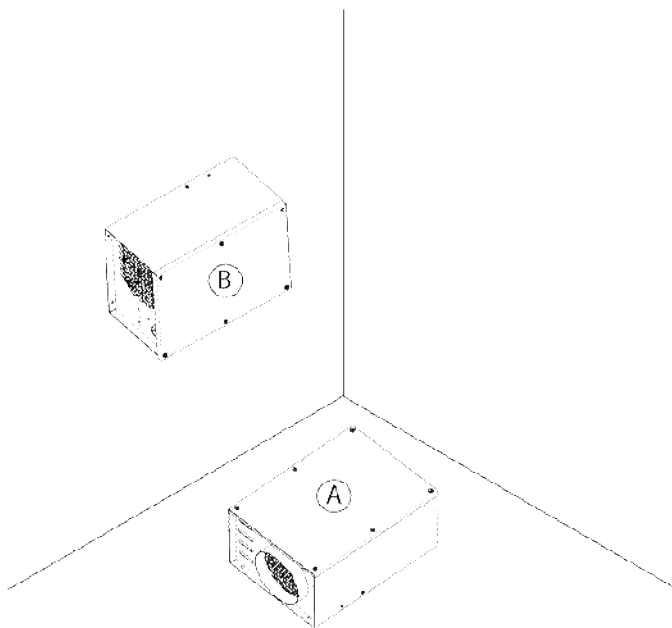

**Illustration 4: Mounting Positions**

**Acceptable Mounting Positions**


**Position A – Floor Mount**

The heater may be installed in any position where the exhaust exits the heater straight down.

**Position B – Horizontal Wall Mount**

The heater may be mounted on the wall provided it is mounted as pictured (the air inlet is on the left and the air outlet is on the right when facing the cover of the heater).

In order to ensure adequate air flow for the heater to operate properly, the cold air inlet and hot air outlet must be 6" or more from a wall or obstruction. In addition, the sides and top of the heater must have at least 1" of clearance from nearby objects.

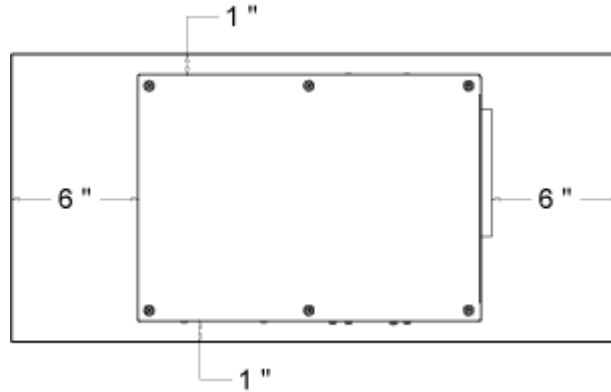

**Illustration 5: Mounting Clearances**

## 5.4 Mounting

Check that the template matches the heater. Tape the drilling template in the desired location for the heater, checking that it is level and flat. Center punch the location of the air inlet and outlet holes and one of the top mounting holes indicated on the template. Remove the template and identify the size of the holes on the wall. If you are cutting the larger holes with a jigsaw or saber saw, use a compass to mark the circles.

Drill all three holes to the size indicated on the template.

Lift the heater into place and align it with the mounting holes. Once the heater is lined up, slide a 1/4" bolt (with a washer) into the top mounting hole you drilled. If desired, finger tighten the nuts on this bolt to keep the heater from pulling away from the wall. Level the heater and mark the other three mounting holes. Remove the heater and drill the remaining holes. Lift the heater into place and install and tighten all four mounting bolts.

If desired, install the included exhaust coupling to allow redirection of the exhaust or to protect the mounting surface of the heater from damage. A fiberglass paper gasket is included for insulation between the coupling and the mounting surface for the heater.

Mount the thermostat. Select a location where it may be easily accessed and it is away from drafts. If the thermostat has a remote temperature probe, mount this on a surface that is expected to be the same temperature as what you are heating. In other words, don't mount the probe near the ceiling, the hot air outlet, or on a cold metal surface.

## 5.5 Wiring

The high levels of vibration and the temperature extremes these heaters are exposed to is hard on electrical connections. Always use quality electrical connectors, fittings, and wire as clean, secure connections are essential for both the proper operation of this heater and long-term trouble-free operation.

Run wires from the thermostat to the heater and from the vehicle to the heater. These wires must be secured to the wall of the vehicle and should be stranded wire of at least 18ga. Thinner wire can work for the thermostat but the joints and connections tend to be much less resistant to long-term vibration. Trim the wire so that it can extend at least 6" past the grommet and into the heater.

Check that the power to the heater is off. Connect the wires to the terminal block. Two of the terminals are power into the heater and the other two terminals are for the thermostat.



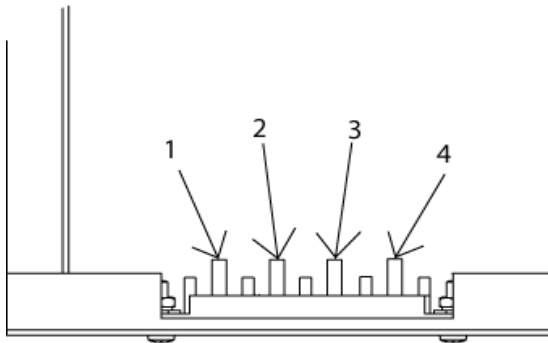


Illustration 6: Terminal Block

Label	Purpose	Typical Wire Color
1	V- (Ground)	Black
2	V+ (12V)	Red
3	Thermostat Hot	Red
4	Thermostat Heat	White

Table 1: Wiring Guide For Terminal Block

## Fuel System

Attention: These instructions are intended for general guidance only. Consult the current regulations in your area or the latest standards, NFPA 58 for the United States or CAN/CGA 149.2 for Canada, for exact requirements.

Before you begin mounting any components, it is recommended that you determine the approximate mounting location of all components to ensure that all parts can be connected with the available lengths of hose and tubing. The recommended order of installation is:

- 1) Install the propane tanks or propane tank carriers.  
 All propane tanks must be "DOT" or "ASME" approved, setup for vapor withdrawal, and mounted in line with the manufacturer's instructions and the applicable code.  
 Install the propane tank or propane tank carrier, such as the X-1025 or X-1050, following the instructions included with product. Installation instructions are available for all tanks purchased from Elston Manufacturing. If your tank or tank carrier does not have instruction, contact the manufacturer for guidance and refer to the installation code that applies in your area.  
 Any tanks should be mounted at least 18" from any portion of the exhaust system for the heater or the vehicle. If this is not possible, it must be shielded from the exhaust components by a vehicle frame member or a baffle of noncombustible material. The item that is shielding the tank must have an air space between itself and the exhaust component and itself and the tank to properly shield the tank from heat. If a baffle is used, it should be constructed so that it is expected to resist corrosion at least as long as the tank.

Attention: New tanks that are purchased empty come filled with air or an inert gas that needs to be purged before the tanks are filled for the first time. Remember to inform the propane supplier if your empty tank is new.

- 2) Mount the regulators  
 All regulators must be CSA/UL approved and securely attached with the vent opening facing straight down. It should be mounted on exterior surface and must not be installed in the space that the heater will be heating. It must be attached so it is supported by screws attached to the mounting holes on the regulator and not by the fittings attached to it. If the regulator is mounted in an unsheltered location, it must have either a durable

cover or be installed in an enclosure. If the regulator is mounted at or below the floor level of the vehicle, it must be installed in an enclosure. The enclosure must be

- sufficient size to allow connection to and replacement of the regulator
- vapor tight to the interior of the vehicle
- have 1 in2 or larger vent opening within 1 in of the bottom of the compartment and 2 in below the regulator vent opening
- contain no flame or spark producing equipment
- designed and mounted with as much ground clearance as practical

3) Install all hoses and fittings

Attach all fittings to the regulators, heater, and the tanks.

The POL fitting attached to the tank must have a built-in excess flow valve. All fittings including bulkheads must have wrench flat or similar way that each fitting can be individually tightened or loosened (close nipples are not allowed). The threads in fittings must be a tapered pipe thread and sealed with a joint sealant approved for this use.

Attach the hoses as necessary. All hose assemblies must carry a CSA/UL approved label and be 36" or shorter.

4) Install the copper propane line

The copper line should be run as directly as possible between components while maintaining adequate clearance from the exhaust system and areas with a high risk of impact damages such as above the tires. Once the route for the copper tubing is determined, any necessary holes in the frame or floor supports can be drilled and installed with grommets and the tubing can be pulled into place, trimmed to length, deburred, fitted with the correct nut, flared, and attached. The 3/8" copper line must

- meet either the specification for either ASTM B 88 (Type K or L) or ASTM B 280. In Canada installations, the tubing must additionally be marked and plastic or rubber coated in accordance with CAN/CSA-B149.5-05.
- Have no joints and can not be extended in any way
- be protected by grommets or another method with similar protection when traveling through bulkheads or portions of the trailer frame, be securely clamped to the front wall of the trailer, and otherwise supported and secured to minimize the effects of vibration
- be installed in a protected location that is visible for inspection. It cannot be installed inside the frame or any pipe or tubing.
- not be installed inside the vehicle except as necessary to hook up to the heater. It should not be closer than 4 inches to any part of the exhaust system, run directly above any tire, or within 6" of any tire.
- Not be in contact with any electrical wiring
- be connected so that slight shifting and the expansion or contraction that occur with temperature do not cause stress on the fittings

5) Test the System for Leaks


The propane system must be tested for leaks before the operation of the heater is tested or it is placed into operation. This leak test must use a pressure gauge or manometer. If a leak is found, it must be located using a combustible gas indicator, suitable leak detection

solution, isolated testing and inspection of piping segments, or a combination of these methods.


### **Final details**

Give the installation one final check to make sure nothing has been forgotten or improperly completed. If everything looks good, the heater is ready to be test fired. For instructions on firing up the heater for the first time please consult the quick start guide. Once the heater has been test fired, the low pressure regulator should be set to deliver 10.5" to 11" W.C. pressure to the heater while it is running.

The installation is now complete and the heater can be placed in service.

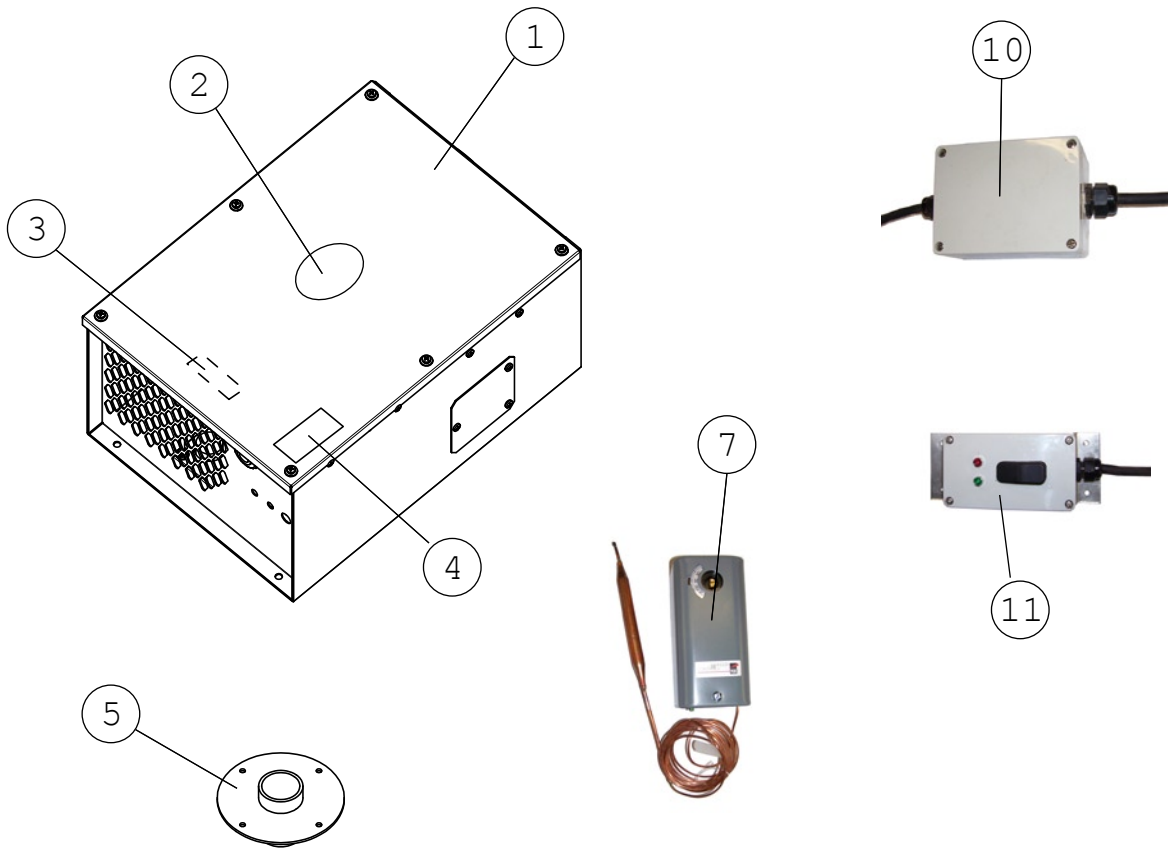

Ref #	Name	Part #	Ref #	Name	Part #
1	Heater Body	see p A2	9	Mounting Template (not shown)	HD-28
2	Product of Elston Decal	SD-02	10	24V Converter Box	HC-500
3	Serial Number	HD-22	11	Remote Box	HC-550
4	Decal - Voltage & Pressure Requirements	HD-23	1-9	Universal Heater - 12VDC	H-C-1
5	Exhaust Coupling	HC-111	1-10	Universal Heater - 24VDC	H-C-24
6	Gasket for HC-111 (not shown)	HC-112	1-9,11	Universal Heater - 12VDC w/ Remote	H-C-1R
7	Thermostat	HLC-225			
8	Owners Manual (not shown)	HD-27			

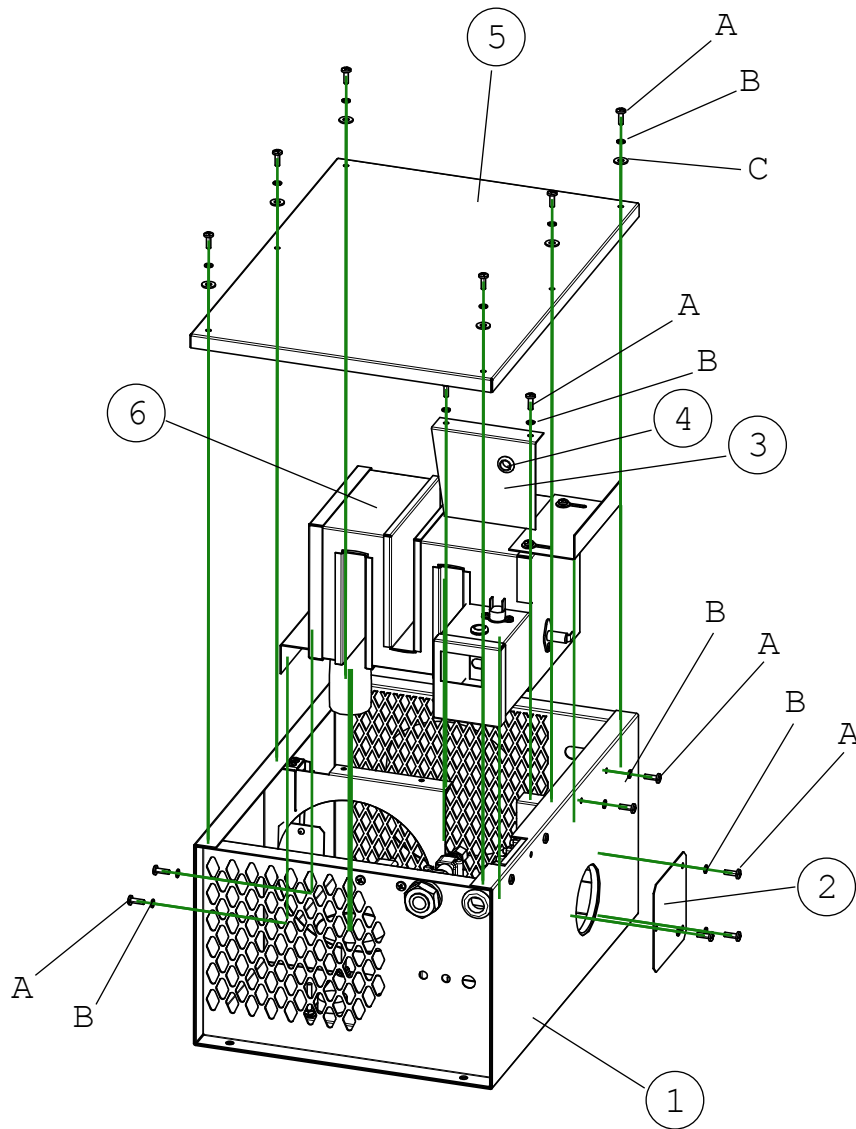


Ref #	Name	Part #
1	Heater Shell	HC-100
2	Spark Probe Access Panel	HC-1-05
3	Blower Slot Cover	HC-1-01
4	3/8" ID Grommet	HC-407
5	Heater Shell Cover	HC-101
6	Combustion Chamber Assembly	see p A4
7	Fan (not shown)	HC-405

Ref #	Description
A	1/2" #8-32 SS Machine Screw
B	#8 SS Lock Washer
C	#8 SS Flat Washer

See page A3 for electrical and propane related parts


Use high temperature anti-seize compound on all screws attaching combustion chamber assembly

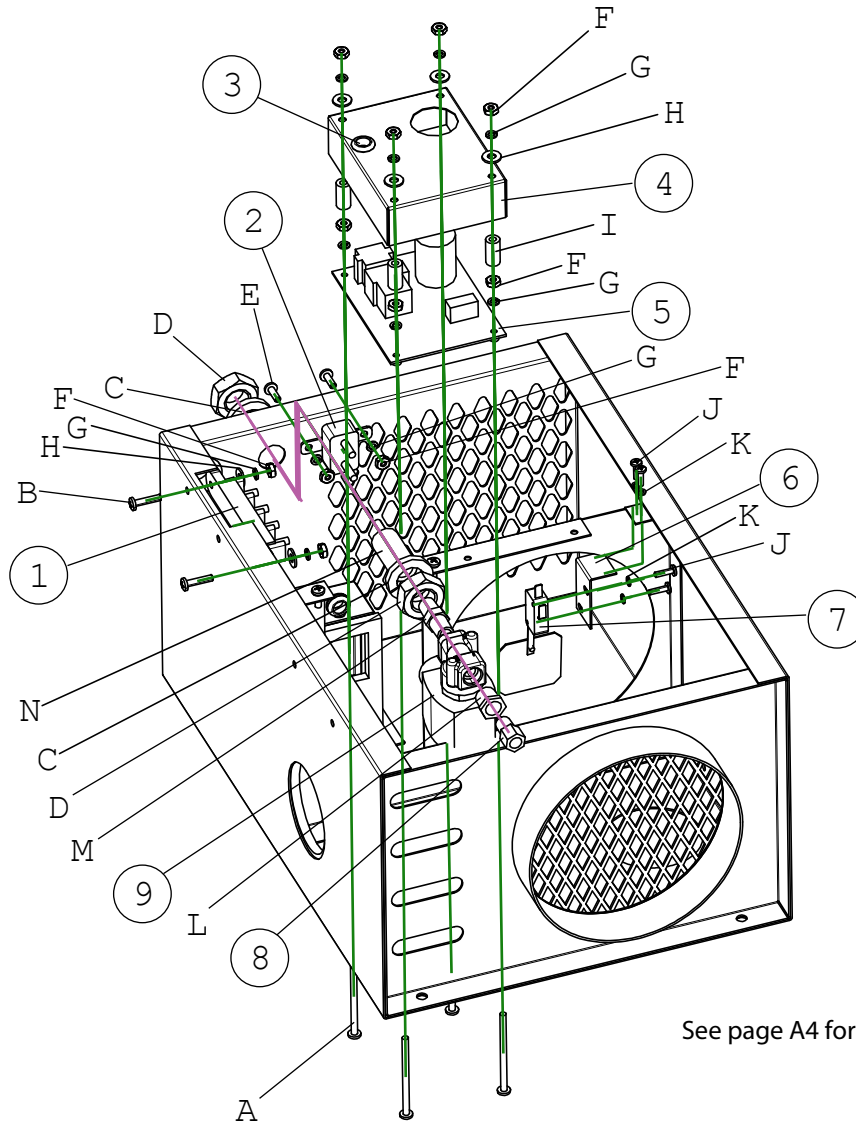

See page A4 for close up of blower inlet area

Ref #	Name	Part #	Ref #	Description
1	Terminal Block	HC-418	A	1 3/4" #8-32 SS Machine Screw
2	6A Circuit Breaker	HC-409	B	3/4" #8-32 SS Machine Screw
3	3/8" ID Grommet	HC-407	C	3/4" Lock Washer
4	Ignition Module Cover	HC-1-03	D	3/4"-16 Jam Nut
5	Ignition Module w/Relay	HLC-918	E	1/2" #8-32 SS Machine Screw
6	Sail Switch Mounting Bracket	HC-1-06	F	#8-32 SS Hex Nut
7	HC Sail Switch	HC-417	G	#8 SS Lock Washer
8	Extension Orifice	HC-413	H	#8 SS Flat Washer
9	Gas Valve	HLC-229	I	3/4" Plastic Standoff - 0.156" ID
10	Green Indicator Light (not shown)	HC-553	J	1/2" #6-32 SS Machine Screw
11	Red Indicator Light (not shown)	HC-554	K	#6 SS Lock Washer
12	Toggle Switch (not shown)	HLC-401	L	1/4" - 1/8" NPT Bushing
			M	1/4" NPT Hex Nipple
			N	1/4" NPT Coupling w/ 3/4"-16 Outside Threads


**Closeup of Blower Area**

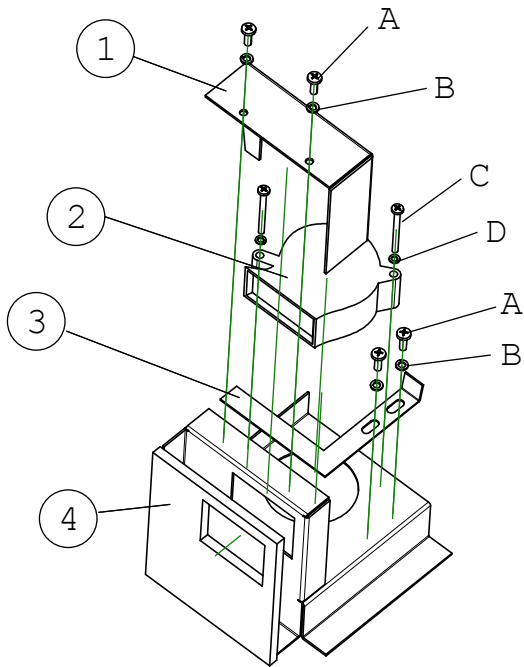

Ref #	Name	Part #
1	Blower Inlet Cover	HC-1-02
2	Small Blower	HC-420
3	Air Adjustment Plate	HC-1-04
4	Combustion Chamber Inlet Gasket	HC-1-07

Ref #	Description
A	1/2" #8-32 SS Machine Screw
B	#8 SS Lock Washer
C	1 1/2" #6-32 SS Machine Screw
D	#6 SS Lock Washer


**Combustion Chamber Assembly**

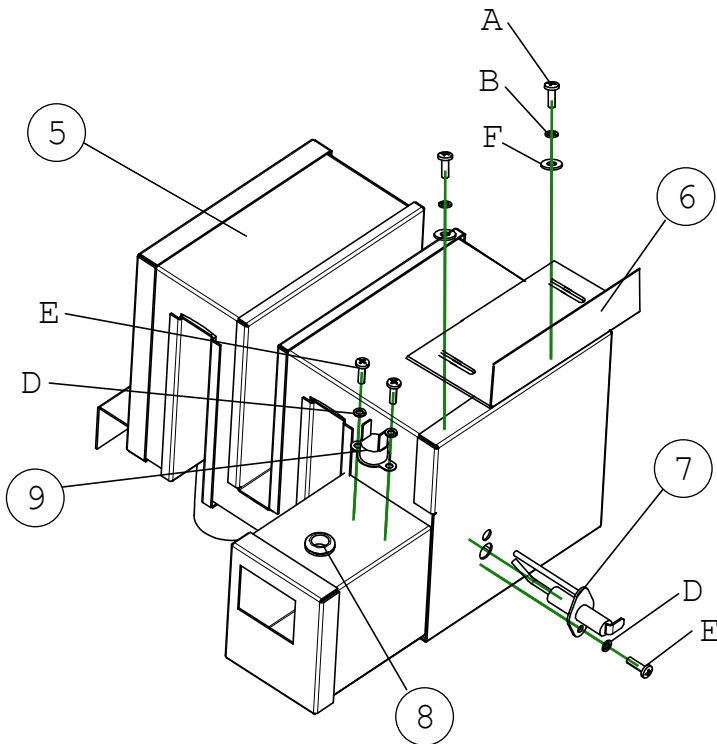

Ref #	Name	Part #
5	Combustion Chamber	HC-200
6	Comb. Chamber Top Mounting Bracket	HC-420
7	HC Spark Probe	HC-416
8	3/8" ID Gasket	HLC-407
9	High Limit Switch	HC-414
5,7-9, D,E	Combustion Chamber Complete	HC-200C

Ref #	Description
E	1/2" #6-32 SS Machine Screw
F	#8 SS Flat Washer


Use high temperature anti-seize compound on all screws in combustion chamber assembly

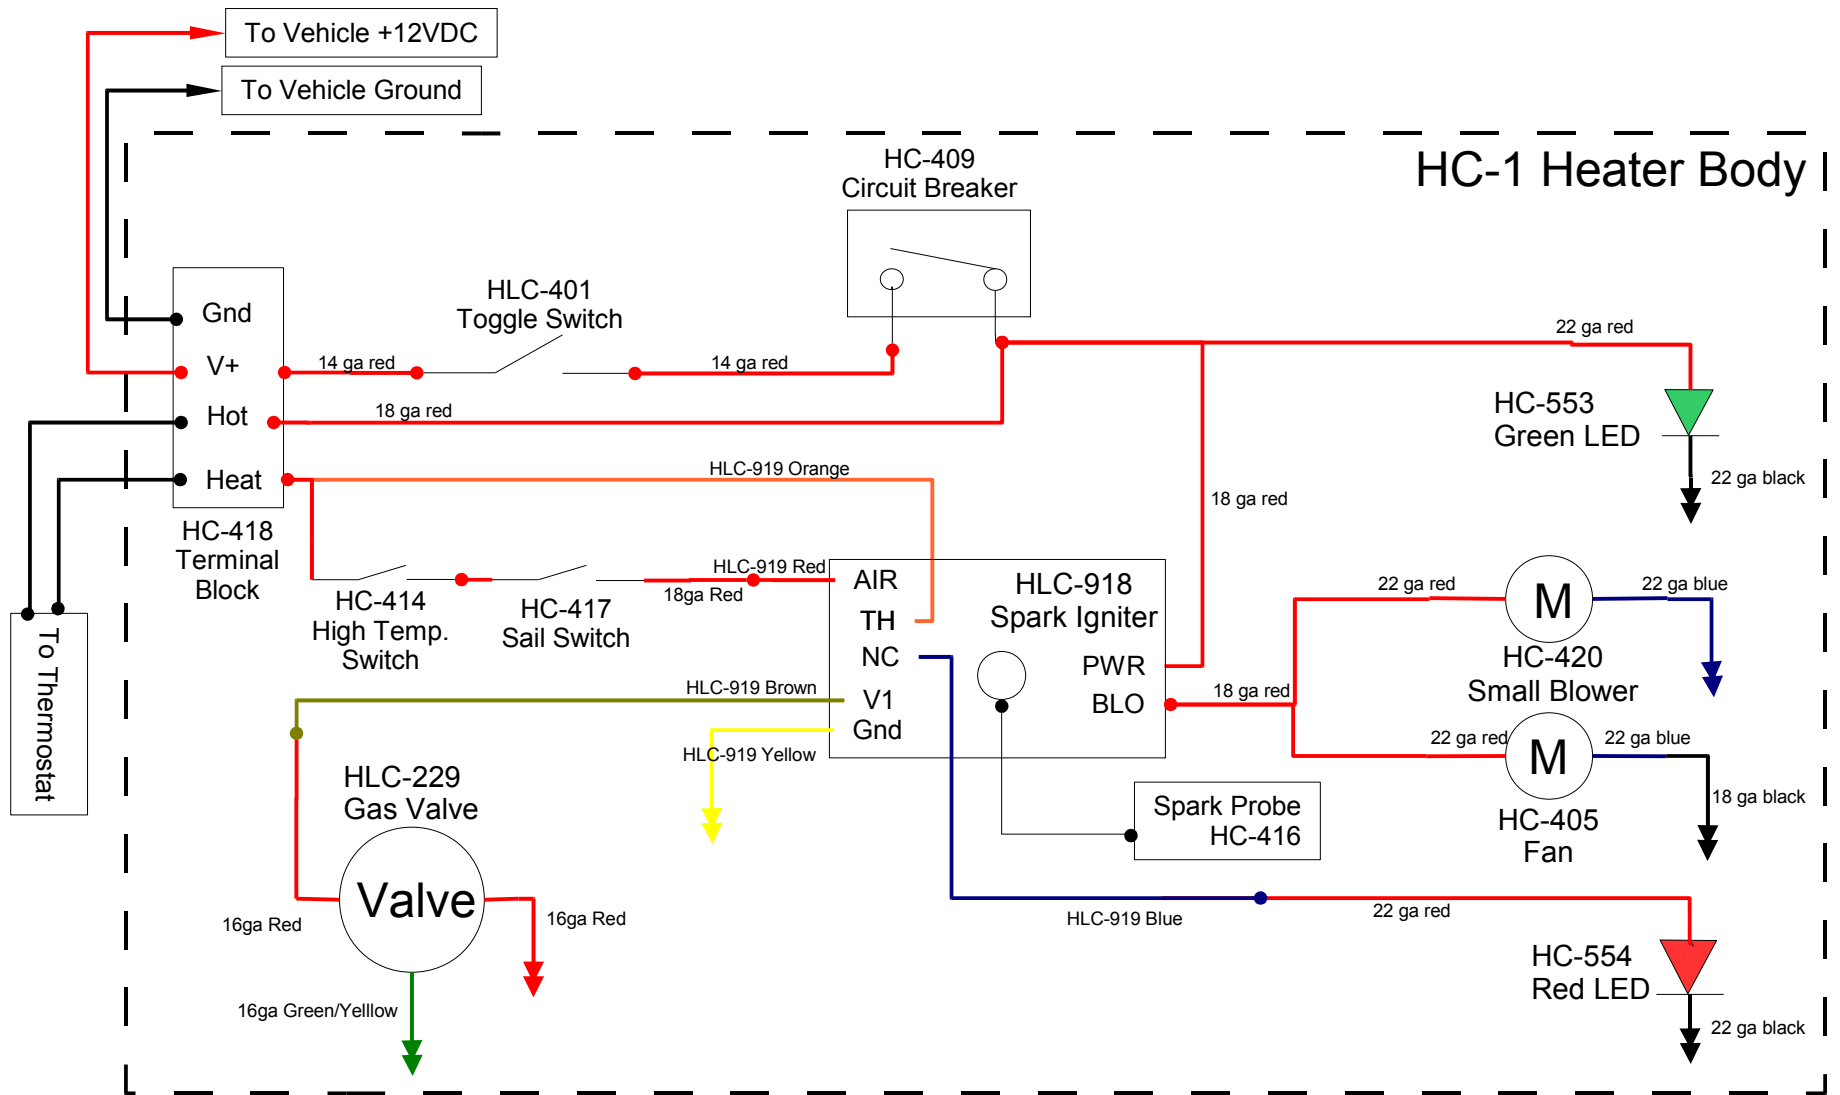

- Field Serviceable Connection (terminal or quick connect)
- ↓ Connected to Ground Terminal on HC-404

H-C-1 Wiring Diagram  
 Revision 3  
 11/3/2008




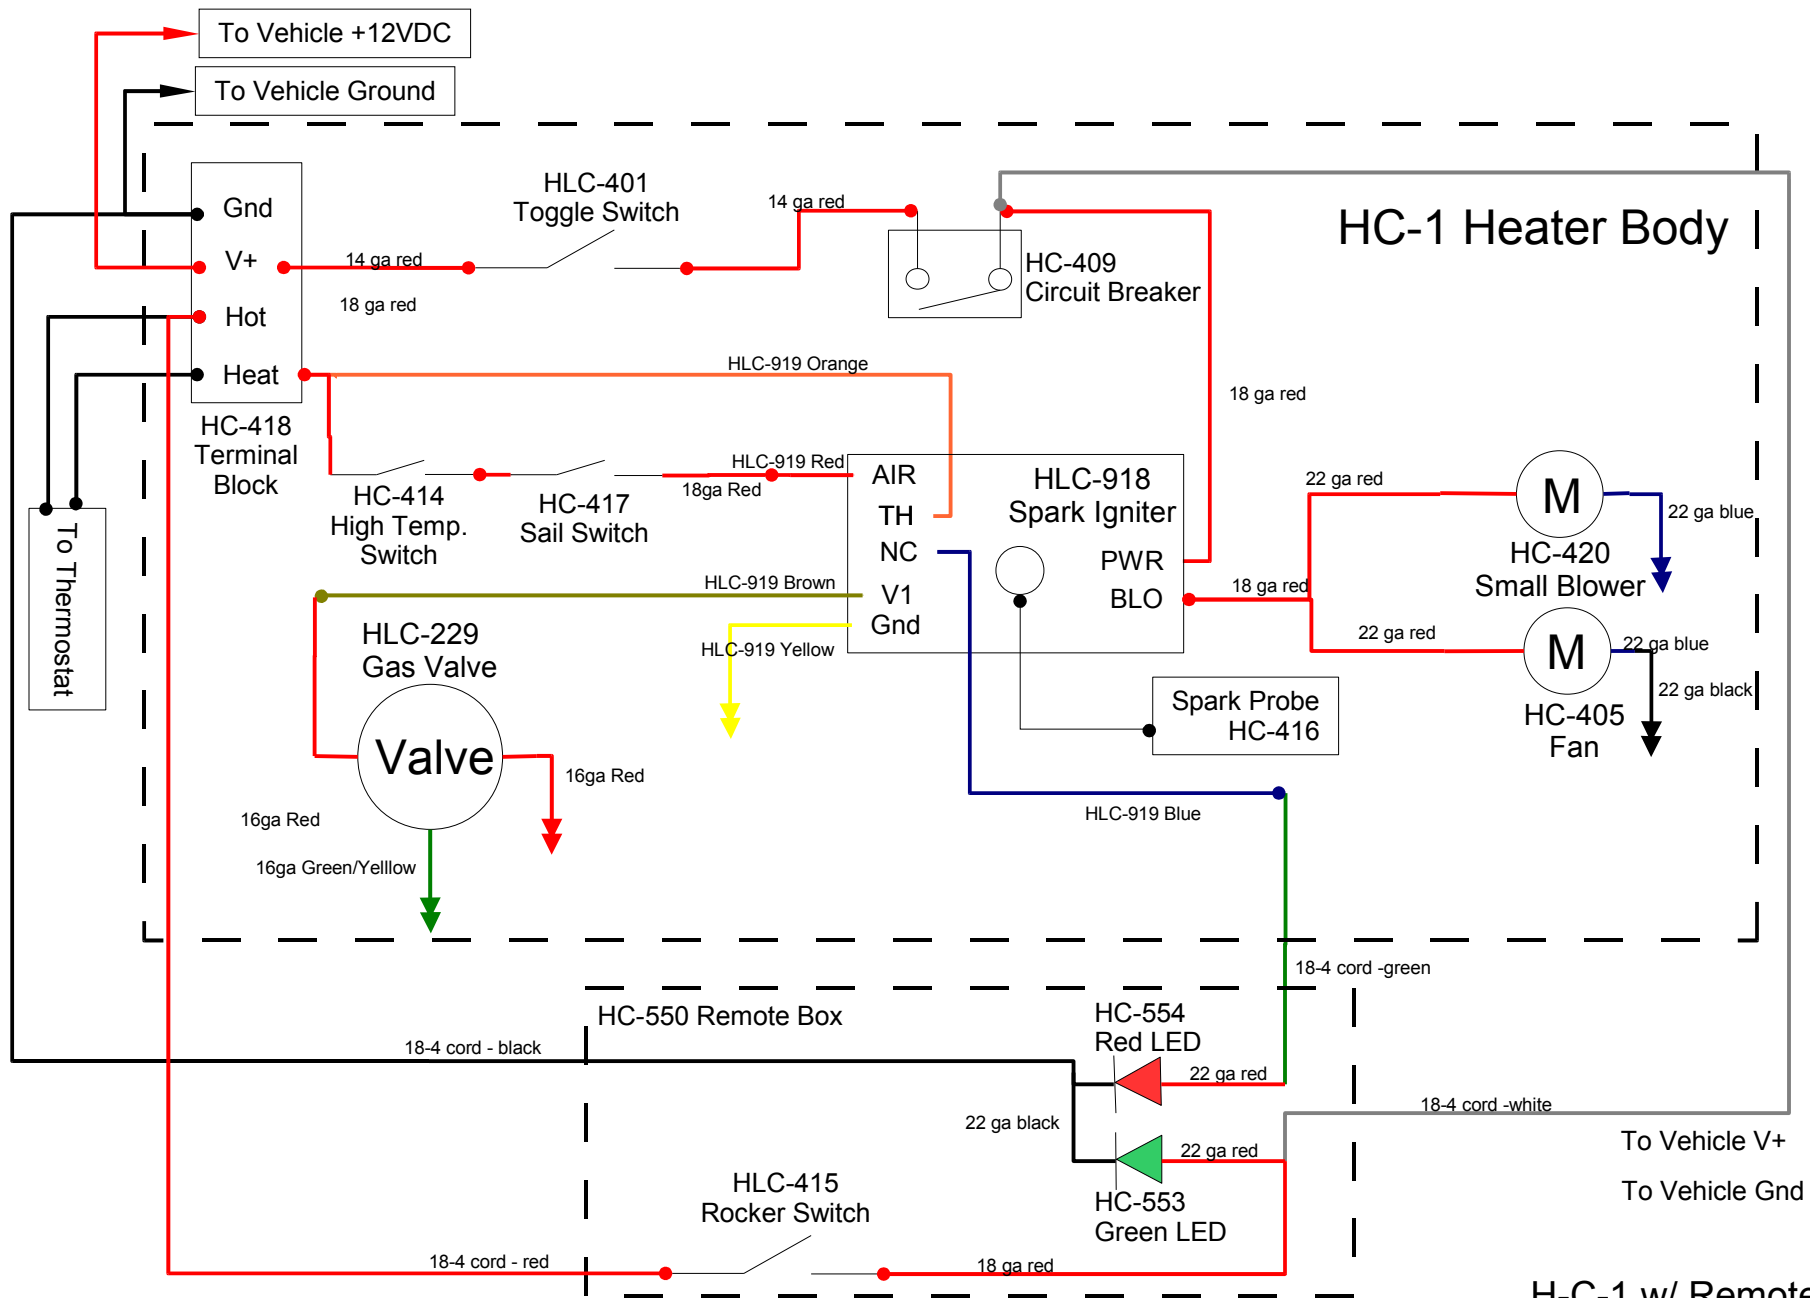

● Field Serviceable Connection (terminal or quick connect)  
 ↓ Connected to Ground Terminal on HC-418

H-C-1 w/ Remote Box  
 Wiring Diagram  
 11/3/2008 Rev. 1

# HC-1 Heater Body

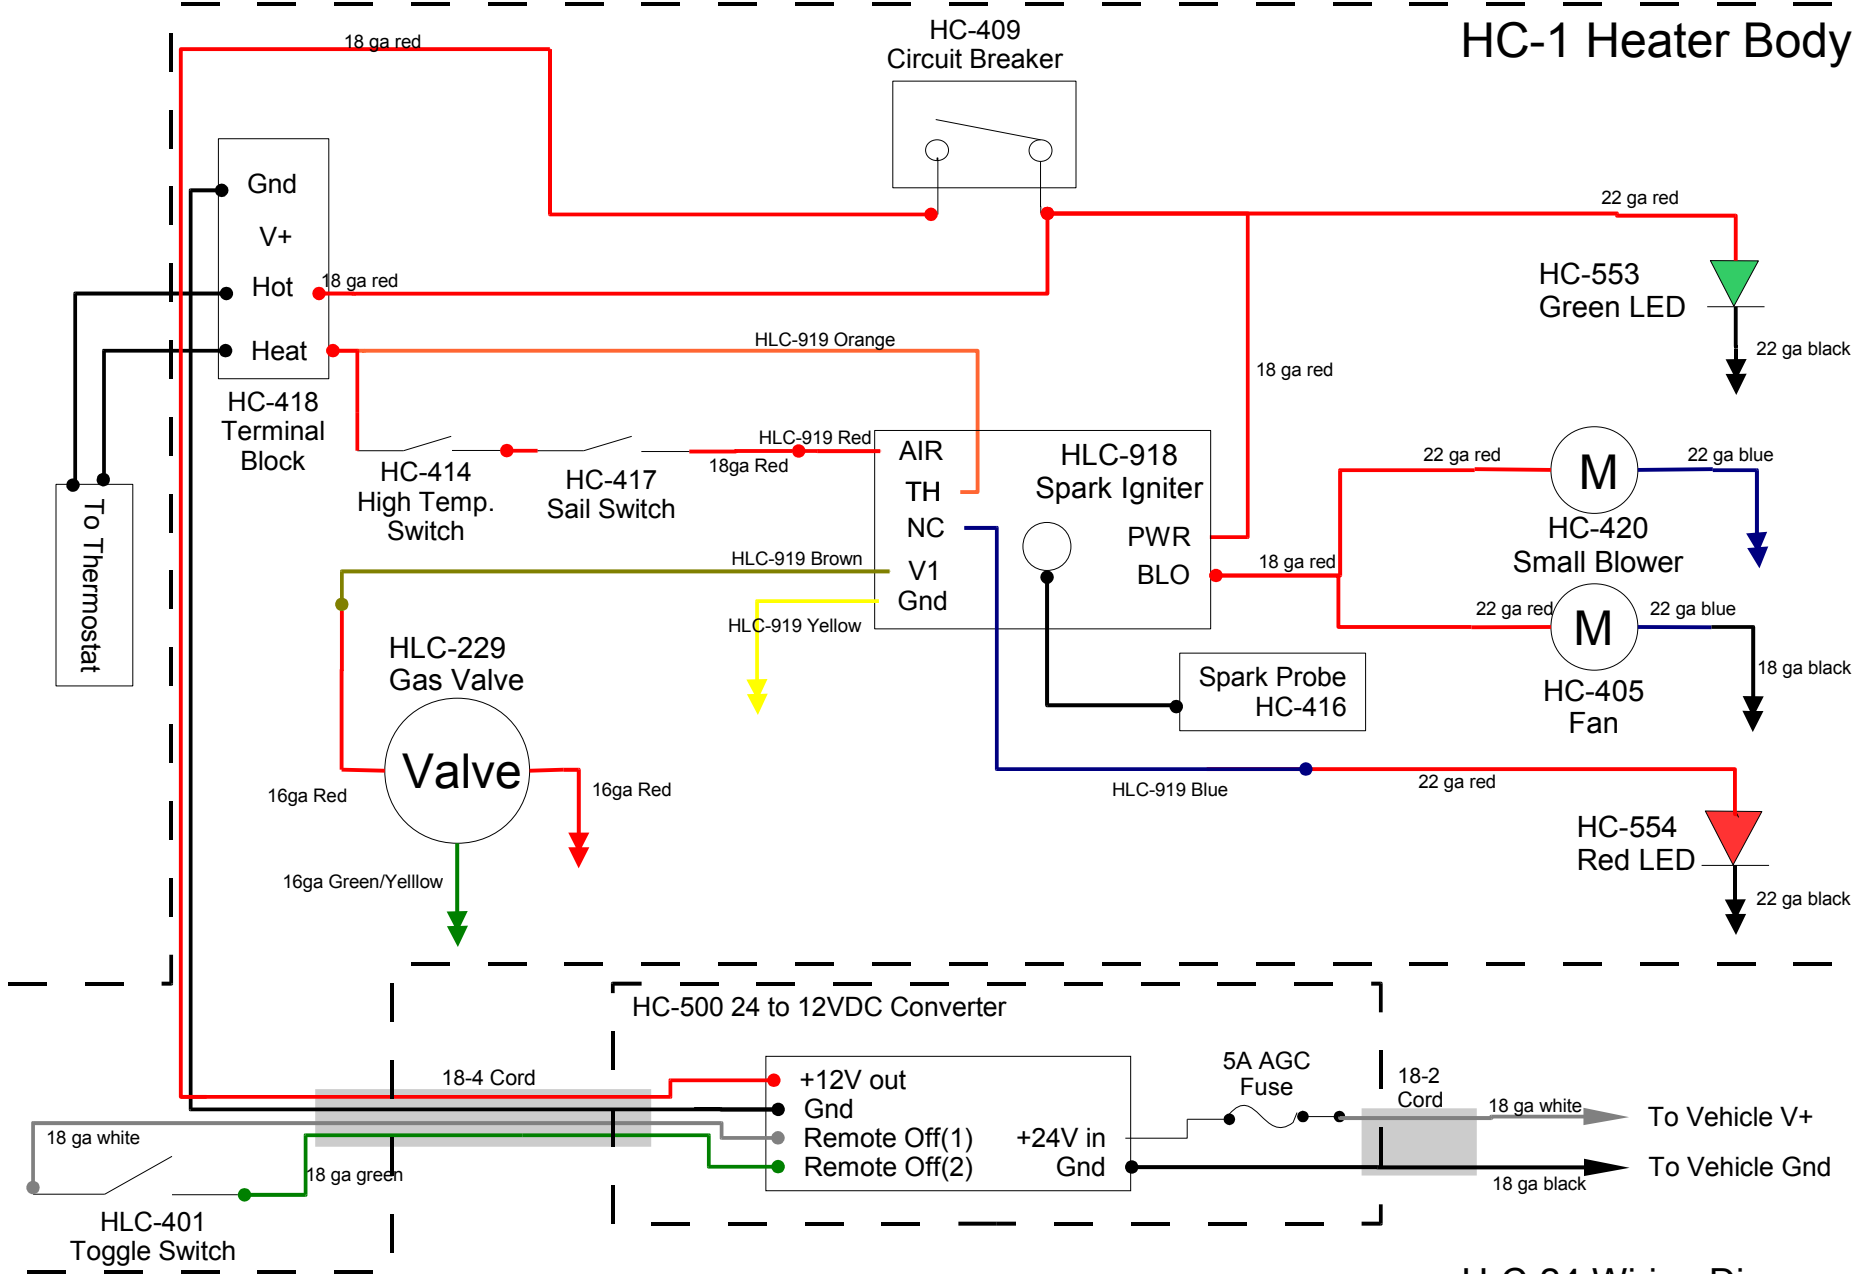

● Field Serviceable Connection (terminal or quick connect)  
 ↓ Connected to Ground Terminal on HC-418

H-C-24 Wiring Diagram  
 Revision 2  
 11/3/2008