




NIGHT STICK[®]

Tough, Durable, Affordable[™]

Tactical Dual-Light[™] Flashlight

Rechargeable

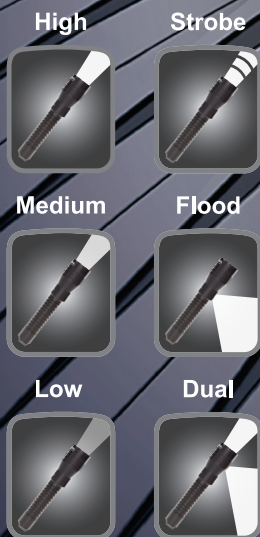

TECHNOLOGY

The NSR-9844XL Rechargeable Xtreme Lumens Multi-Function Tactical Dual-Light Flashlight uses a CREE[®] LED rated at 650 lumens to create a usable beam of light rated at 280 meters. A 200 lumen unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The NSR-9844XL has a unique tail-switch that operates both the flashlight and floodlight in one configuration. The upper portion of the switch operates the flashlight that provides both momentary or constant-on functionality with high, medium or low-brightness settings as well as a disorienting strobe and the lower portion of the switch operates a downward facing floodlight. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum with a Type III hard-anodized finish. Power comes from a rechargeable Lithium-ion battery.

650 Flashlight
Lumens

200 Floodlight
Lumens

400 Dual-Light
Lumens

- Flashlight/Floodlight/Dual-Light
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 280 meters
- Powered by Lithium-ion rechargeable battery



NSR 9844XL



Tactical Dual-Light™ Flashlight

Rechargeable

FEATURES: ALL MODELS

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Aircraft-grade 6061-T6 aluminum housing, tail-cap and bezel
- Type III hard anodized finish
- Non-slip grip
- Dual-function tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty*

INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Back-up CR-123 battery carrier
- AC power supply
- 12 V DC power supply



SPECIFICATIONS

- Flashlight lumens: high-650, medium-250, low-150
- Flashlight run-time: high-1.5hrs, medium-4hrs, low-6.5hrs
- Floodlight lumens: 200
- Floodlight run-time: 3hrs
- Dual-Light lumens: 400
- Dual-Light run-time: 2.5 hrs
- Candela: 19,112
- Recharge time: 4 hours (typical)
- Beam distance: 280 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in, head diameter: 1.5in, handle diameter: 1.1in, weight: 8oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	250 LUMENS	150 LUMENS
	1h 30min	4h	6h 30min
	280m	217m	79m
	19112cd	11733cd	1571cd
	2m		
	1m		

MODELS / ACCESSORIES

Model	Description	UPC 0 17398
NSR-9844XL	Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords	80489 9
NSR-9844XLDC	Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord	80529 2
NSR-9844XLLB	Rechargeable Tactical Dual-Light Flashlight with battery	80530 8
9844-BATT	Replacement Lithium-ion battery	80540 7
9600-USB	USB cord – 27in	80227 7
9800-RCONE	Red cone	80527 8
9800-YCONE	Yellow cone	80528 5
9800-BCONE	Blue cone	80526 1
9844-CHGR1	Charger	80541 4
9842-CARRIER	Back-up CR-123 battery carrier	80539 1



*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.