



PRODUCT FACT SHEET

POLYTAC® / POLYTAC® HP LITHIUM POWER POLYMER FLASHLIGHT

MARKET: Sporting Goods, Fire & Rescue, Law Enforcement, Security, Hardware/Tool, Industrial, Automotive, Consumer.

DESCRIPTION: The PolyTac® is a bright and compact personal polymer light available with the latest in power LED technology and three different user selectable programs. The light features a superior grip texture to provide a comfortable but slip resistant feel. Packaged with a removeable pocket clip.

CASE MATERIAL: High impact super tough nylon polymer for exceptional durability and a sure grip. All openings o-ring or gasket sealed. Available in black, yellow or coyote.

DIMENSIONS:

PolyTac®:	PolyTac® HP:
Length: 5.34 in. (13.56 cm)	Length: 5.90 in. (14.98 cm)
Body Diameter: 1.00 in. (2.54 cm)	Body Diameter: 1.00 in. (2.54 cm)
Head Diameter: 1.25 in. (3.18 cm)	Head Diameter: 1.68 in. (4.26 cm)
Major Diameter: 1.36 in. (3.45 cm)	

WEIGHT: PolyTac®: 4.2 oz (121 grams)* PolyTac® HP: 5.2 oz (148 grams)*

LENS: PolyTac®: Glass lens, o-ring sealed.
PolyTac® HP: Unbreakable polycarbonate with scratch-resistant coating, o-ring sealed.


LIGHT SOURCE: C4®LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See charts for specific model.



RUN TIME: See charts for specific model. All claims to 10% of initial lumen output.
ON/OFF: Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

BATTERIES: Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.



FEATURES: C4® LED technology.
LED Solid State Power Regulation provides maximum light output throughout battery life.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
3 meter impact resistance tested.
Superior grip texture for sure grip.
TEN-TAP™ programmable switch allows user selection of one of three different programs.
Removable pocket clip.
Serialized for positive identification

APPROVALS: Meets applicable European Community Directives **CE**
PolyTac® meets requirements of NFPA 1971-8.6 (2007)
Note: PolyTac® HP is not recommended for Fire Helmet mounting.

WARRANTY: Streamlight's Limited Lifetime Warranty


OPTIONAL ACCESSORIES:

PolyTac®: Holster, Safety Wands, Colored Flip Lenses.

PolyTac® HP: N/A

	POLYTAC®			POLYTAC® HP		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
OUTPUT		275 LUMENS	14 LUMENS		275 LUMENS	14 LUMENS
RUNTIME		3h	65h		3h	56h
DISTANCE		195m	45m		275m	63m
INTENSITY		9,500cd	500cd		19,000cd	1,000cd

Strobe Runtime: 5h 30m

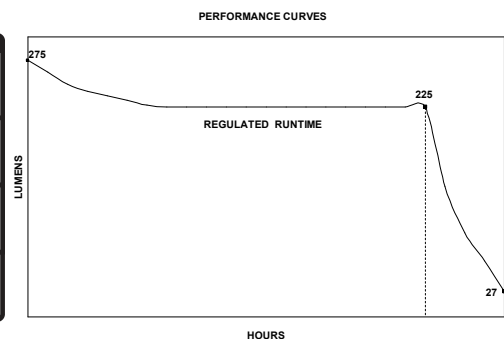

*With batteries; batteries included in purchase
All performance claims tested to ANSI/NEMA FL1-2009 Standard
Issued: 10/24/2013
Revised: 11/08/2013 Rev: 1