


















PRODUCT FACT SHEET

POLYTAC®/POLYTAC® LED/ POLYTAC® LED HP LITHIUM POWER POLYMER FLASHLIGHT

MARKET:	Sporting Goods, Fire & Rescue, Law Enforcement, Security, Hardware/Tool, Industrial, Automotive, Consumer		
DESCRIPTION:	The PolyTac® is a super bright and compact personal light available with either the latest in power LED technology or Xenon bulb. The light uses CR123A Lithium primary cells.		
CASE MATERIAL:	High impact super tough nylon polymer for exceptional durability and a sure grip. All openings o-ring sealed for water resistance. Available in black, yellow or coyote. PolyTac® LED HP available in black or yellow.		
DIMENSIONS:	PolyTac®/PolyTac® LED: Length: 5.22 in. (13.3 cm) Major Diameter: 1.25 in. (3.18 cm) Body Diameter: 1.00 in. (2.54 cm)	PolyTac® LED HP: Length: 5.65 in. (14.35 cm) Major Diameter: 1.70 in. (4.32 cm) Body Diameter: 1.00 in. (2.54 cm)	
WEIGHT:	PolyTac®: 3.9 oz (110 grams)* PolyTac® LED: 4.1 oz (116 grams)* PolyTac® LED HP: 4.4 oz (125 grams)*		
LENS:	PolyTac®/PolyTac® LED: Glass lens, o-ring sealed. PolyTac® LED HP: Unbreakable polycarbonate with scratch-resistant coating, o-ring sealed.		
LIGHT SOURCE:	PolyTac®: 6-Volt, high pressure Xenon gas filled bi-pin bulb with 30 hour life. PolyTac® LED/PolyTac® LED HP: C4®LED technology, impervious to shock with a 50,000 hour lifetime.		
LIGHT OUTPUT:	See charts for specific model.		
RUN TIME:	See charts for specific model. All claims to 10% of initial lumen output.		
ON/OFF:	Tailcap push button provides one handed momentary or constant "on" operation.		
BATTERIES:	Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.		
FEATURES:	C4®LED technology (LED). Adjustable head allows for variable spot-to-flood focus (Xenon only). LED Solid State Power Regulation provides maximum light output throughout battery life (LED). IPX7 rated design; waterproof to 1 meter for 30 minutes.		
			
APPROVALS**:	Most models meet applicable European Community Directives  PolyTac® LED meets requirements of NFPA 1971-8.6 (2007)		
WARRANTY:	Streamlight warrants this product to be free of defect for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work or that you manage to break for as long as you own it. Of course, this limited lifetime warranty excludes abuse, batteries and bulbs.		
OPTIONAL ACCESSORIES:	PolyTac®/PolyTac® LED: Holster, Safety Wands.	PolyTac® LED HP: N/A	

	POLYTAC®	POLYTAC® LED	POLYTAC® LED HP
OUTPUT	 72 LUMENS	 130 LUMENS	 150 LUMENS
RUNTIME	 1h 20min	 3h	 3h
DISTANCE	 155m	 144m	 245m
INTENSITY	 6000cd	 5200cd	 15,000cd

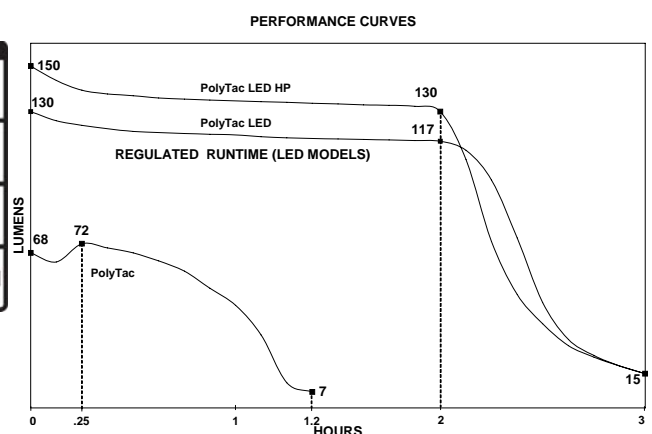

*With batteries; batteries included in purchase

** See product for specific ratings.

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 12/03/2008

Revised: 02/01/2010 Rev: 5

Assembled In The USA.

Document #212