




One handed snap-on and tighten interface keeps hands away from muzzle when attaching/detaching  
Mounts directly to all MIL-STD-1913 (Picatinny) rails and weapons with Glock-style rails

C4 LED technology, impervious to shock with a 50,000 hour lifetime

Two 3V CR123A lithium batteries (included)

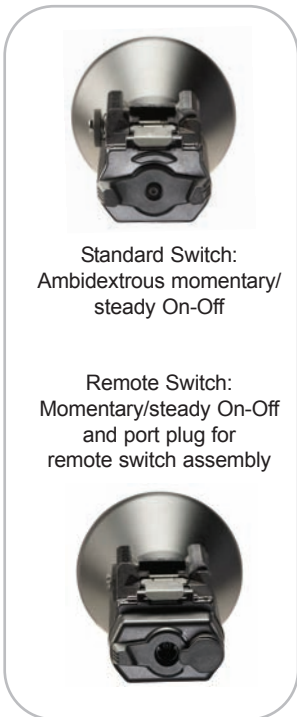

Deep dish parabolic reflector produces long-range targeting beam with optimum peripheral illumination

Unbreakable polycarbonate lens with scratch-resistant coating



### HP stands for high-powered. The TLR-1 HP series produce a long-range targeting beam that reaches 400+ meters!

46,000 candela peak beam intensity; 200 lumens  
Runs 1.75 hours

Tethered battery door and latch mechanism prevents battery door loss while providing easy battery replacement

Extensively live-fire tested impact resistant construction

IPX7 rated design; waterproof to 1 meter for 30 minutes

Operating temperature: -40°F to +120°F

Serialized for positive identification

Length with standard switch: 4.83 in. (12.27 cm)  
Length with remote switch: 5.25 in (13.34 cm)  
5.3 oz (150.3 grams) with standard switch and batteries  
5.6 oz (158.8 grams) with remote switch and batteries

Limited lifetime warranty

Available with either standard door switch or remote door switch. Includes rail locating keys for mounting to a variety of rails and lithium batteries. Clam packaged

- 69215 - TLR-1s HP STD
- 69216 - TLR-1s HP RMT
- 69217 - TLR-1 HP STD
- 69218 - TLR-1 HP RMT