

ELD-219m : 2U Rackmount 19" LCD Drawer Real Mouse with Speakers

Model: ELD219m



Features:


- 19" 1280x1024 SXGA TFT LCD Panel
- Active Area: 376mm x 301mm
- Built-in speakers and audio -in jack
- LCD color: 16.7 million colors
- Max depth with adjustable bracket: 35.3 inches
- Built-In keyboard and PS/2 real mouse
- 100-240VAC full-range AC Adapter
- Dimensions:
- Operating temperature 0 to 40 degree C
- Storage temperature: -20 to 60 degree C
- Humidity 10% to 90% non-condensing
- Open Altitude: 0 - 3,000m or 10,000ft
- Black color
- All mounting hardware included

Display Performance

Items	Specifications
Screen Diagonal	480 (19") mm
Active Area	376.32 (H) x 301.056 (V) mm
Pixel H x V	1280 (x 3) x 1024
Pixel Pitch	0.294 (per one triad) x 0.294mm
Pixel Arrangement	R.G.B Vertical Stripe
Display Mode	Normally Black
White Luminance	250 cd/m ² @ 7mA (Typ)
Contrast Ratio	700:1 (Typ)
Optical Response Time	25 (Typ) msec
Nominal Input Voltage	+5.0 V
Power Consumption	40W
Support Color	16.7 M colors (RGB 8-bit data)
Temperature Range	
Operating	0 to +50 °C
Storage (Shipping)	-20 to +60 °C



Mechanical Drawings

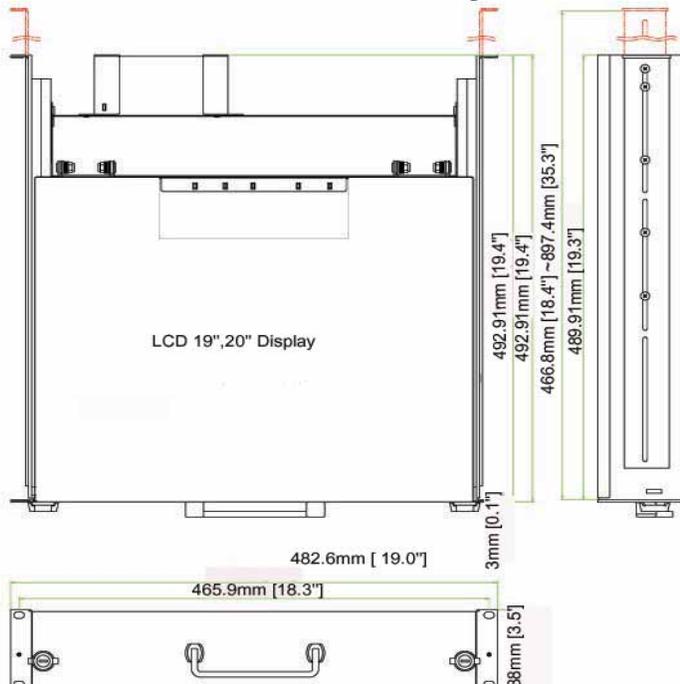

Power supply

Built-in adapter: 110V - 220V AC Input 12V 4A Output
 Cable length from mains plug to adapter: 6ft (182cm)
 Safety approval: UL, CE

Product Dimension 19" (W) x 3.5" (H) x 19.4" (D)

Packing dimension 28" (L) x 29" (W) x 9" (H)

Weight

Model No	KVM	Net / Gross weight
ELD219m	Non	Approx 45lbs