



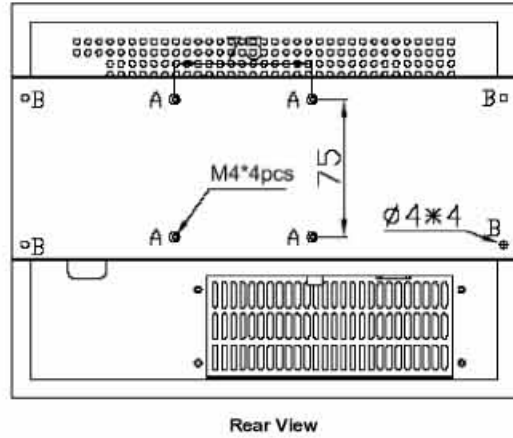

iAP-1000AV 10.4" Industrial 6mm Aluminium Front Bezel LCD Display

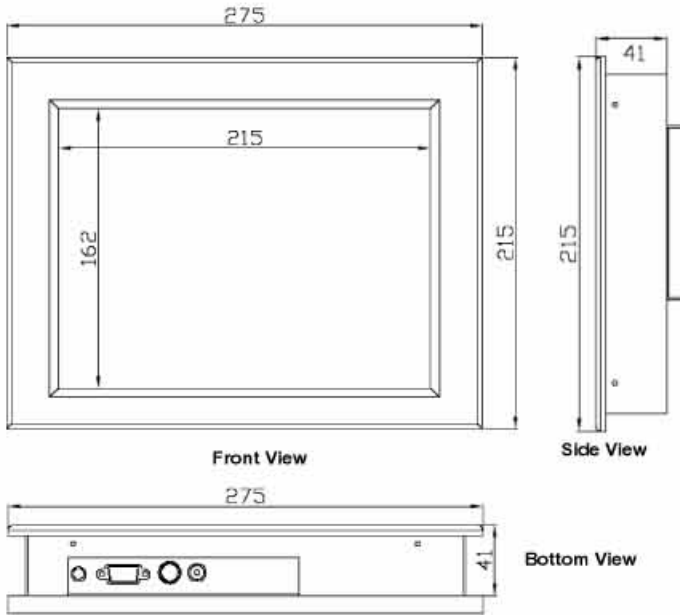

LCD Screen

LCD Type	Grade A industrial TFT LCD Panel
Display Size	10.4 inch diagonal (211.2H x 158.4V)
Resolution	800 x 600, SVGA
Display Color	262,144 color
Brightness	350 cd/m ²
Contrast Ratio	180 : 1 (Typical)
Pixel Pitch	0.264 x 0.264 mm
Viewing Angle	60 / 60 / 55 / 40 (L / R / U / D)
OSD Control	Brightness, Contrast, Phase & Clock, Color, H & V position, Auto-tune & Recall
VGA Connector	D-Sub 15 pin VGA analog
Video Input	S-Video and RCA Composite
LCD MTBF	50,000 hrs
Mounting	Panel, wall-mount or VESA arm
Dimension	275(W) x 215(H) X 41(D) mm
Weight	2.5 kg (Net) / 4.5 kg (Gross)
Packing	480 (L) x 362 (W) X 85(D) mm

Touch Screen

Manufacturer	3M	
Type	3M Resistive	3M Capacitive
Thickness	3mm	3mm
Light transmission	75%	85%
Controller Interface	Serial / USB	Serial / USB
Durability	35 Million	225 Million
OS Support	Windows XP, 2000, NT, 98, DOS and Linux	

External Power Adapter

AC Input	110V ~ 220V AC Input
DC Input	12V@5A Output
AC Cable Length	180cm
DC Cable Length	182cm
Size	108(L) x 64(W) x 30(H) mm
Safety Approval	UL, CE

Environmental

Operating Temperature	-20 to 60°C
Storage Temperature	0 to 50°C
Humidity	80%, non condensing
Shock	10G peak acceleration (11mec. duration)
Safety Approval	CE, FCC

Ordering Information

Model	Description
iAP-1000AV	10.4" Aluminium Front Panel w/ Video Input
iAP1000AV-TRS	10.4" Al. FP w/ Video, Res. touch screen (Serial)
iAP1000AV-TRB	10.4" Al. FP w/ Video, Res. touch screen (USB)
iAP1000AV-TCS	10.4" Al. FP w/ Video, Cap. touch screen (Serial)
iAP1000AV-TCB	10.4" AL. FP w/ Video, Cap. touch screen (USB)