






iDP-600AV 6.4" Stylish Aluminum Cover TFT LCD Display

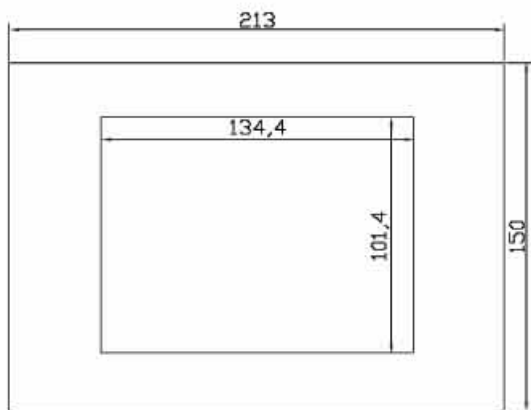


Front View

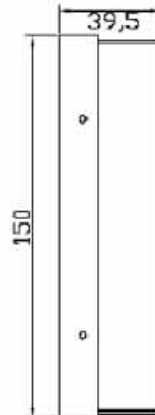

Side View

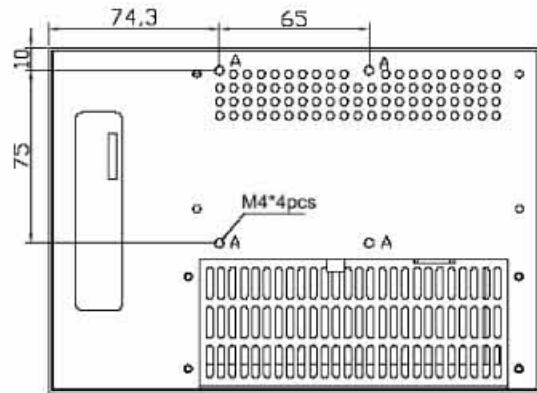

Rear View

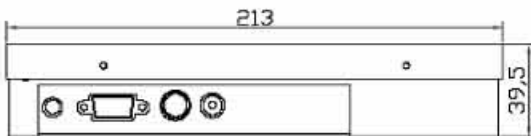

Bottom View

LCD Screen

LCD Type	Grade A industrial TFT LCD Panel	
Display Size	6.4 inch diagonal (129.6H x 97.44V)	
Resolution	640 x 480, VGA	
Display Color	262,144 color	
Brightness	300 cd/m ²	
Contrast Ratio	180 : 1 (Typical)	
Pixel Pitch	0.203 x 0.203 mm	
Viewing Angle	55 / 55 / 15 / 35 (L / R / U / D)	
OSD Control	Brightness, Contrast, Phase & Clock, Color, H & V position, Auto-tune & Recall	
VGA Connector	D-Sub 15 pin VGA analog	
Video Input	S-Video and Composite	
LCD MTBF	20,000 hrs	
Mounting	Panel, wall-mount or VESA arm	
Dimension	213(W) x 150(H) X 40(D) mm	
Weight	1.5 kg (Net) / 3.5 kg (Gross)	
Packing	480(L) x 362(W) x 85(H) mm	

Touch Screen

Manufacturer	3M	
Type	3M Resistive	3M Capacitive
Thickness	3mm	3mm
Light transmission	75%	85%
Controller Interface	Serial / USB	Serial / USB
Durability	35 Million	225 Million
OS Support	Windows XP, 2000, NT, 98, DOS and Linux	

External Power Adapter

AC Input	110V ~ 220V AC Input
DC Input	12V@5A Output
AC Cable Length	180cm
DC Cable Length	182cm
Size	108(L) x 64(W) x 30(H) mm
Safety Approval	UL, CE

Environmental

Operating Temperature	-30 to 70°C
Storage Temperature	-20 to 70°C
Humidity	80%, non condensing
Shock	10G peak acceleration (11mec. duration)
Safety Approval	CE, FCC

Ordering Information

Model	Description
iDP-600AV	6.4" Display Panel w/ Video Input
iDP600AV-TRS	6.4" DP w/ Video, Res. touch screen (Serial)
iDP600AV-TRB	6.4" DP w/ Video, Res. touch screen (USB)
iDP600AV-TCS	6.4" DP w/ Video, Cap. touch screen (Serial)
iDP600AV-TCB	6.4" DP w/ Video, Cap. touch screen (USB)