

KM-1301S_H-P

STACKABLE ICE CUBER

TAMPER PROOF MODEL

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-1301S_H-P

5/14

Item #I3322

CUBER DIMENSIONS

W x D x H

KM-1301S_H-P
48 x 27^{3/8} x 27^{3/8}






Exterior Fasteners are Tamper Proof Torx Pin Screws

KM-1301SAH-P
Air-Cooled I Phase


KM-1301SWH-P
Water-Cooled I Phase



Shown on standard bin for placement only.

- Up to 1329 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 2658 lbs. per 24 hour ice production in the same floor space
- Removable air filters located under front panel (Air-cooled model only)
- R-404A Refrigerant

KM CUBE DIMENSIONS



**approximate size in inches, image not to scale



Warranty

Valid in United States, Canada, Puerto Rico, & U.S.Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



Hoshizaki

KM-130IS_H-P STACKABLE ICE CUBER

DIMENSIONS
W x D x H
KM-130IS_H-P
48 x 27^{3/8} x 27^{3/8}

STACKABLE ICE CUBER

- Air-cooled
- Water-cooled

AIR - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	1329	1281	1188
	80°	1292	1217	1109
	90°	1281	1164	1060

WATER - COOLED


Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	1318	1319	1249
	80°	1319	1321	1211
	90°	1319	1323	1228

UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1301SAH-P	29.8	1440	4.63	15.7	N/A
KM-1301SWH-P	31.0	1440	3.2	19.4	118

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1301SAH-P	Air-Cooled	12.4	20	315 lbs.
KM-1301SWH-P	Water-Cooled	8.2	20	315 lbs.

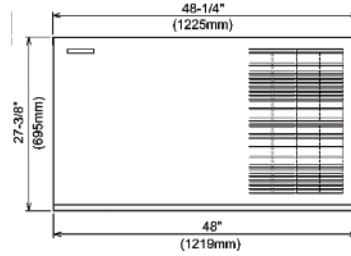


FRONT VIEW




SIDE VIEW



ICE DROP ZONE

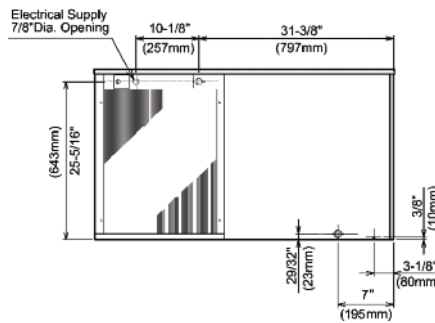

AIR-COOLED UNIT

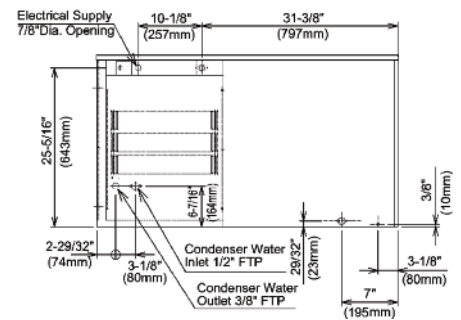

WATER-COOLED UNIT

ELECTRICAL & PLUMBING/KM-130IS_H-P

- 208 - 230V/60/1
- 20 amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply with 3/8" nominal ID minimum
- 3/4" FPT independent drain connection

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters under front panel (Air-cooled model only)
- Exterior fasteners are tamper proof torx pin screws.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

