



ITP-802GSM-8PH24

8x 10/100Base-T + 2x 100/1000Base-X SFP with 8x PoE+ Managed Ethernet Switch

ITP-802GTM-8PH24

8x 10/100Base-T + 2x 100/1000Base-X with 8x PoE+ Managed Ethernet Switch

ITP-800M-8PH24

8x 10/100Base-T with 8x PoE+ Managed Ethernet Switch

ITP-802GSM-8PH24 series are managed industrial grade gigabit PoE (Power over Ethernet) switches with 8 10/100Base-TX PoE ports and/or 2 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmissions. ITP-802GSM-8PH24 series equipped with PoE feature enable power and data to be transferred via a single cable, hereby considerably reducing cabling expenses. ITP-802GSM-8PH24 series also provides a variety of functions to manage PoE operation including PoE device auto-checking, auto reset, and PoE power weekly scheduling. Other advanced Ethernet functions are supported and include STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for the harshest environments. Specifically, ITP-802GSM-8PH24 series switches use M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. ITP-802GSM-8PH24 series are compliant with EN 50155, covering power input voltage, surge, EFT, ESD, vibration, shock, thus making the switches suitable for industrial applications, such as vehicle, rolling stock, ship, vessel.

ITP-802GSM-8PH24 series are IP67 rated to protect against dust and water submersion. They are particularly used in environments with extreme temperature, high humidity, oil, dust and in outdoor environments requiring water-proof applications such as IP surveillance, city security. ITP-802GSM-8PH24 series can also work with CTC Management platform SmartView™ to provide convenient, real-time and centralized device management.

Feature

- 8x 10/100Base-TX M12 and 2x 100/1000Base-X SFP Fiber (Total 10 Port) (ITP-802GSM-8PH24)
- 8x 10/100Base-TX M12 and 2x 10/100/1000Base-T (Total 10 Port) (ITP-802GTM-8PH24)
- 8x 10/100Base-TX M12 (Total 8 Port) (ITP-800M-8PH24)
- M12 and M23 connector against vibration and shock
- IP67 grade housing for against water, dust, and oil (Figure 4)
- 24/48VDC redundant dual input power, and built-in power booster design upto 55 VDC for PoE output (Figure 2)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)
- Provides 8-port IEEE802.3af / 802.3at PoE output (30W per Port)
- Maximum PoE output power budget 180W
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset, PoE configuration for power planning, weekly scheduling
- UL60950-1, CE, FCC, Rail Traffic EN50155, EN50121-4 certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Protection Ring (EPR) for redundant cabling
- Provide up to 5 instances that each supports μ -Ring, u-Chain or Sub-Ring type for flexible uses (Figure 6)
- μ -Ring for Redundant Cabling, recovery time < 10ms in 250 maximum devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security : Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid in case of upgrade failure
- Support IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP IEEE802.1ab LLDP
- Support 5 operating mode in each port: Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Figure 8)
- Supports SmartView for centralized management (Figure 9)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Figure 10)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)

Standard	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
VLAN ID	4094	IEEE802.1Q VLAN VID
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps (ITP-802GSM-8PH24) 5.6Gbps (ITP-802GTM-8PH24) 1.6Gbps (ITP-800M-8PH24) (Full wire-speed)	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
PoE RJ-45 Pin Assignment	8x M12 (4-Pin D-code Female) ports support IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode. Positive (V+): M12 pin 2,4 Negative (V-): M12 pin 1,3. Data (1,2,3,4)	

EN50155 Managed PoE Switch

Network Connector	8x M12 (4-Pin, Female,D-Code) 10/100Base-TX UTP , Auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex 2x M12 (8-Pin, female,A-Code) 10/100/1000Base-T UTP (For ITP-802GTM-8PH24)																														
Network Connector	Water proof Fiber Cable Gland support for 2 X 100/1000 Base-X SFP slot, with DDMI (For ITP-802GSM-8PH24) Build-in 2 bypass port (For ITP-802GTM-8PH24)																														
Console	RS-232 (5-pin A-Code M12 male)																														
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)																														
Protocols	CSMA/CD																														
Reverse Polarity Protection	Present																														
Overload Current Protection	Present																														
CPU Watch Dog	Present																														
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per UTP port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) (For ITP-802GTM-8PH24) SFP Fiber Per port: Link/Active (Green) (For ITP-802GSM-8PH24) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit, Port failed at Startup) : Flash 1times/sec (Green) • PoE Output Power Off : Off (Green)																														
Jumbo Frame	9.6KB																														
MAC Address Table	8K																														
Memory Buffer	256K Bytes for packet buffer																														
PoE Standard	IEEE802.3af, IEEE802.3at																														
PoE Power Output	Maximum PoE output power budget 180W (30W/per port) Regulated PoE output voltage at 55VDC (Figure 2)																														
Power Supply	Provides 1x M23 (5-Pin, male) for redundant dual DC 24/48V (20~57VDC) input power Built-in power booster design up to 55 VDC for PoE output Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 2)																														
Power Consumption	ITP-802GSM-8PH24 <table><tr><th>Input Voltage</th><th>Total Power Consumption</th><th>Device Power Consumption</th><th>PoE Budget</th><th>Boost Efficiency</th></tr><tr><td>24 VDC</td><td>196.4W</td><td>8.1W</td><td>180W</td><td>95.50%</td></tr><tr><td>48 VDC</td><td>197.8W</td><td>9.6W</td><td>180W</td><td>95.60%</td></tr></table> ITP-802GTM-8PH24 <table><tr><th>Input Voltage</th><th>Total Power Consumption</th><th>Device Power Consumption</th><th>PoE Budget</th><th>Boost Efficiency</th></tr><tr><td>24 VDC</td><td>198.3W</td><td>8.9W</td><td>180W</td><td>95.00%</td></tr><tr><td>48 VDC</td><td>198.8W</td><td>10.1W</td><td>180W</td><td>95.30%</td></tr></table>	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	196.4W	8.1W	180W	95.50%	48 VDC	197.8W	9.6W	180W	95.60%	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency	24 VDC	198.3W	8.9W	180W	95.00%	48 VDC	198.8W	10.1W	180W	95.30%
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	196.4W	8.1W	180W	95.50%																											
48 VDC	197.8W	9.6W	180W	95.60%																											
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency																											
24 VDC	198.3W	8.9W	180W	95.00%																											
48 VDC	198.8W	10.1W	180W	95.30%																											

Power Consumption	ITP-800M-8PH24				
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
	24 VDC	195.6W	7.2W	180W	95.50%
	48 VDC	196.8W	8.7W	180W	95.60%
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay				
Alarm Relay Contact	5-pin A-code M12 male Relay outputs with current carrying capacity of 1 A @24VDC				
Operating Temperature	-10 ~ 60°C (ITP-802GSM-8PH24, ITP-802GTM-8PH24, ITP-800M-8PH24) -40 ~ 75°C (ITP-802GSM-8PHE24, ITP-802GTM-8PHE24, ITP-800M-8PHE24)				
Operating Humidity	5% to 95% (Non-condensing)				
Storage Temperature	-40 ~ 85°C				
Housing	Rugged Metal, Fanless , IP67 grade housing for against water, dust, and oil (Figure 4)				
Dimensions	70x240x168mm (D x W x H)				
Weight	2.17kg (ITP-802GSM-8PH24) 2.15kg (ITP-802GTM-8PH24) 2.055kg (ITP-800M-8PH24)				
Installation Mounting	Wall mounting, or DIN Rail mounting (Optional)				
MTBF	184,605Hours (ITP-802GSM-8PH24) 131,930 Hours (ITP-802GTM-8PH24) 218,010 Hours (ITP-800M-8PH24)				
Warranty	5 years				
Certification					
EMC	CE				
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A,CE EN55022 Class A				
Railway Traffic	EN50155, EN50121-4				
Immunity for Heavy Industrial Environment	EN61000-6-2				
Emission for Heavy Industrial Environment	EN61000-6-4				
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A				
Safety	UL60950-1				
Shock	IEC-61373				
Freefall	IEC 60068-2-32				
Vibration	IEC-61373				

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN,up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN,up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN,up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernt, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP,TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Present
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Feature	
Class of Service	IEEE802.1p 8 active priorities queues for per port


Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarkng	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Feature	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling
IGMP / MLD Snooping	Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based, MAC-Based

ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name	Local Authentication
Password	
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
Upgrade	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	
DHCP	Server, Client, Relay, Snooping Snooping option 82, Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave


NTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring cable OK or broken point distance
Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budget (maximum 180W) limitation Power feeding priority

Application

► Figure 1 : ITP Series in Onboard Application

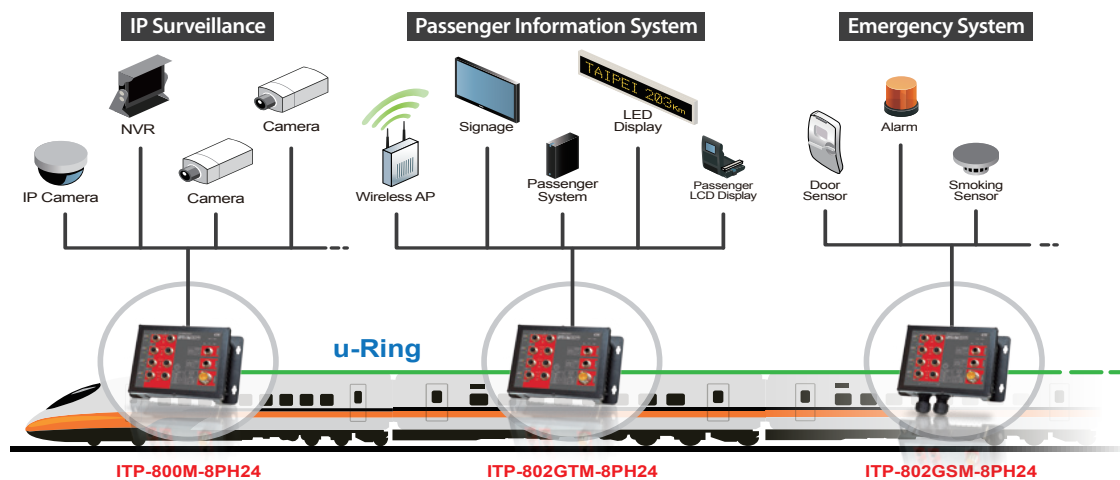

► Figure 2 : High efficiency boost technology for PoE

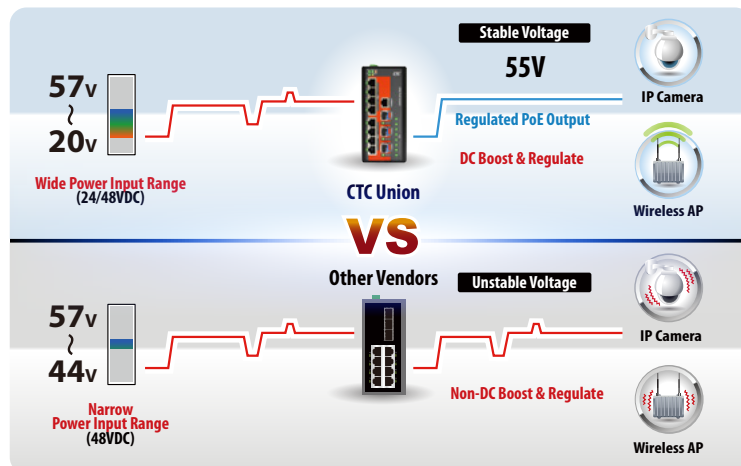

- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meter
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

► **Figure 3 : ITP Series for Industrial Automation**



► **Figure 4 : IP67 Waterproof**



► **Figure 5 : An illustration of μ -Ring instances configured in Web interface**

u-Ring Configuration

Auto-refresh

Refresh


Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	<input type="checkbox"/>	6			
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>

Add New Instance

Save

Reset


► **Figure 6 : μ -Ring Typ**

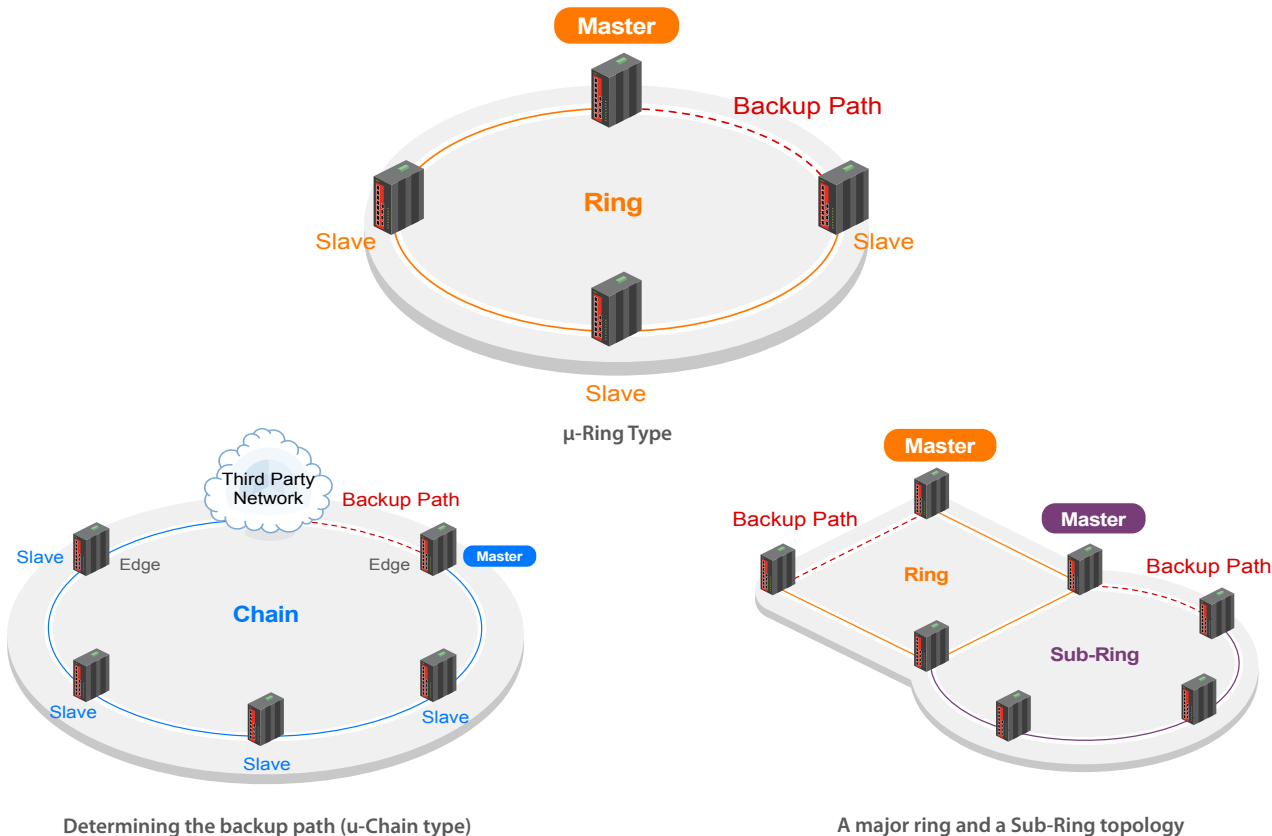


► **Figure 7 : Ring Configuration Example**

Ring Configuration Type


- u-Ring
- Sub-Ring

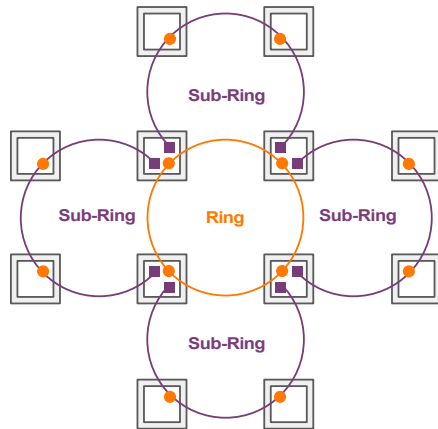


Combination of a ring and four Sub-Ring

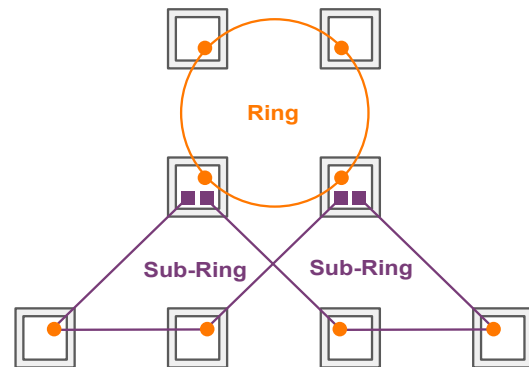

Combination of a ring and two Sub-Ring

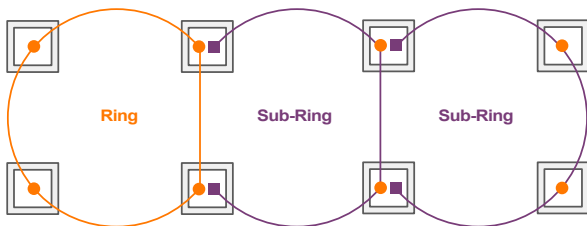


Ring Configuration Type

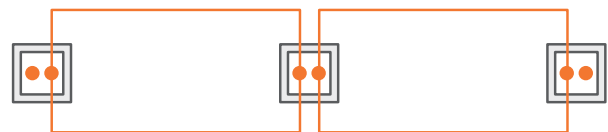


Cable Redundancy

► **Figure 8 : SmartConfig™** is a convenient configuration tool for mass deployment of switch products

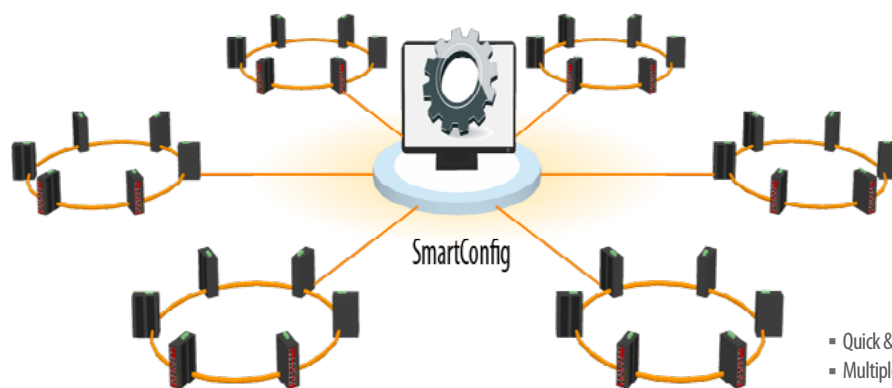


- Quick & Easy for mass configuration tool
- Multiple device auto discovery
- Group configuration, access
- Group firmware upgrade
- Export/Import Configuration

► **Figure 9 : SmartView™**

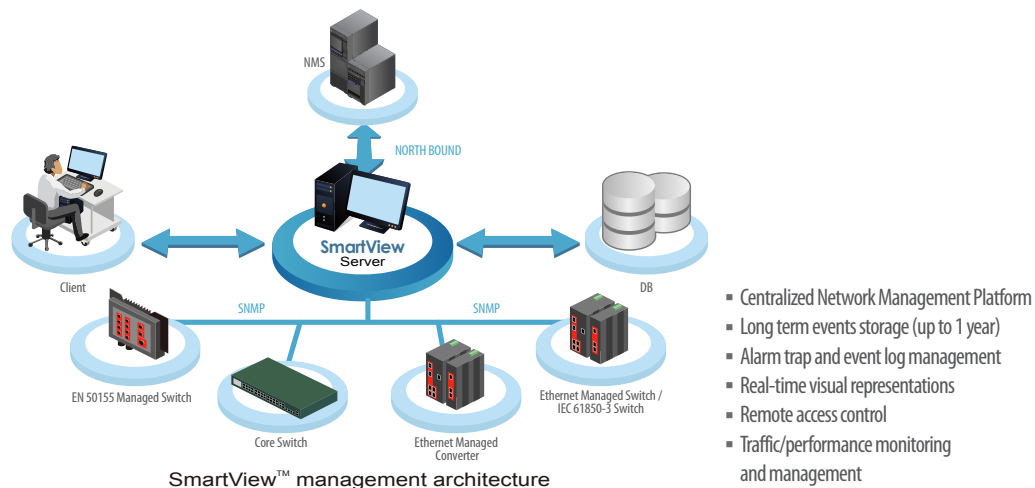


► **Figure 10 : Central EMS allows central management of up to 50 SmartView™ servers**

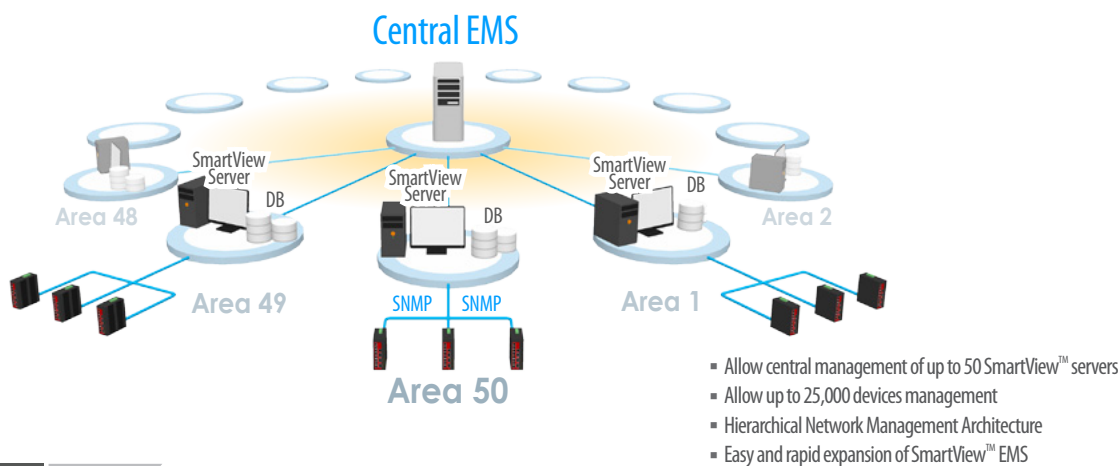


Dimensions


► **ITP-802GSM-8PH24**

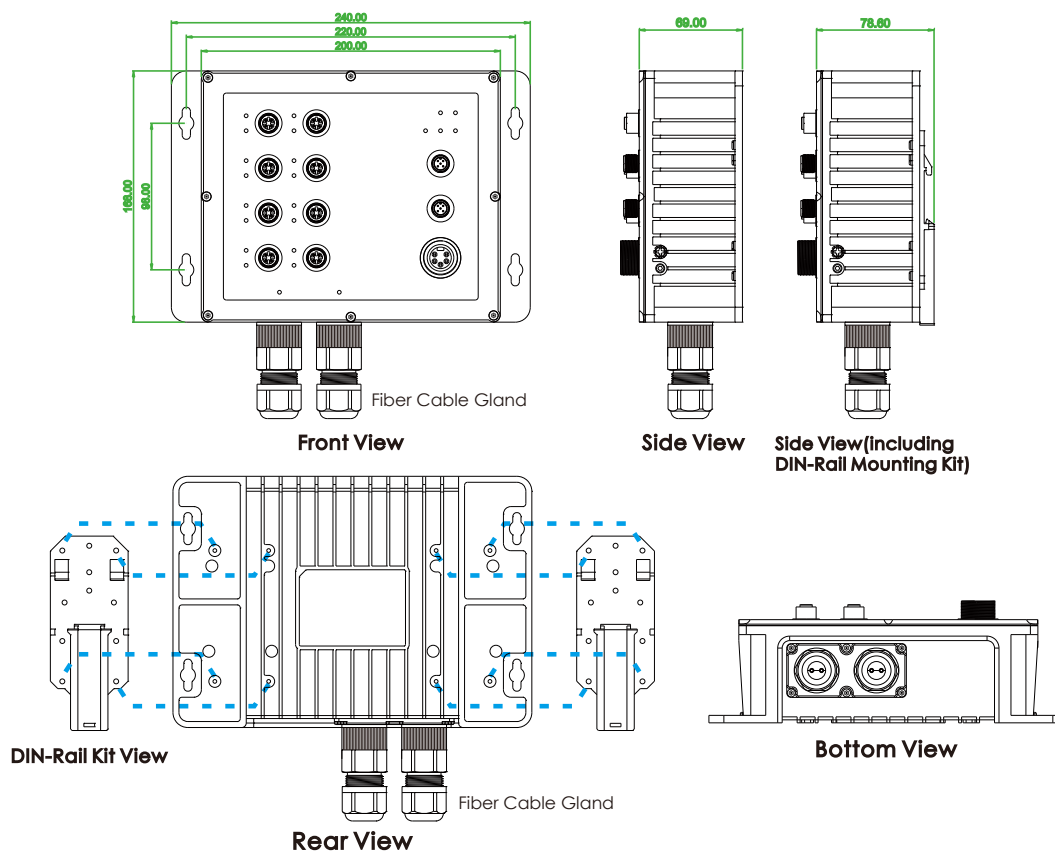

► ITP-802GTM-8PH24

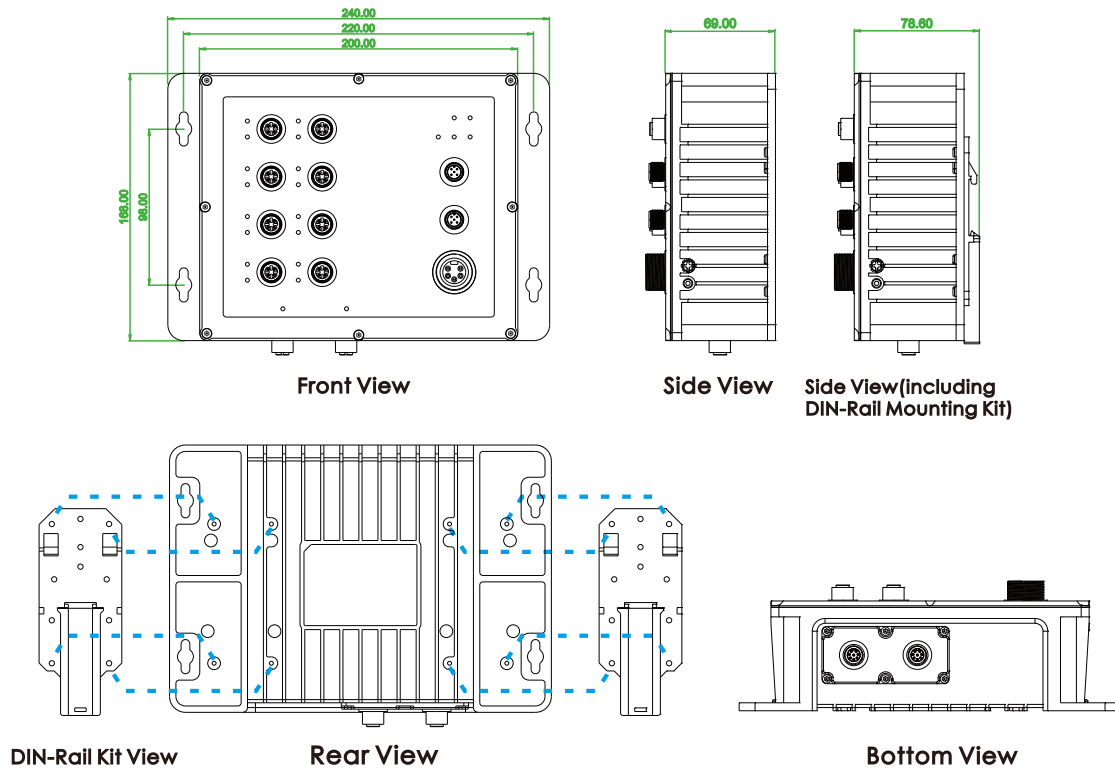


► ITP-800M-8PH24

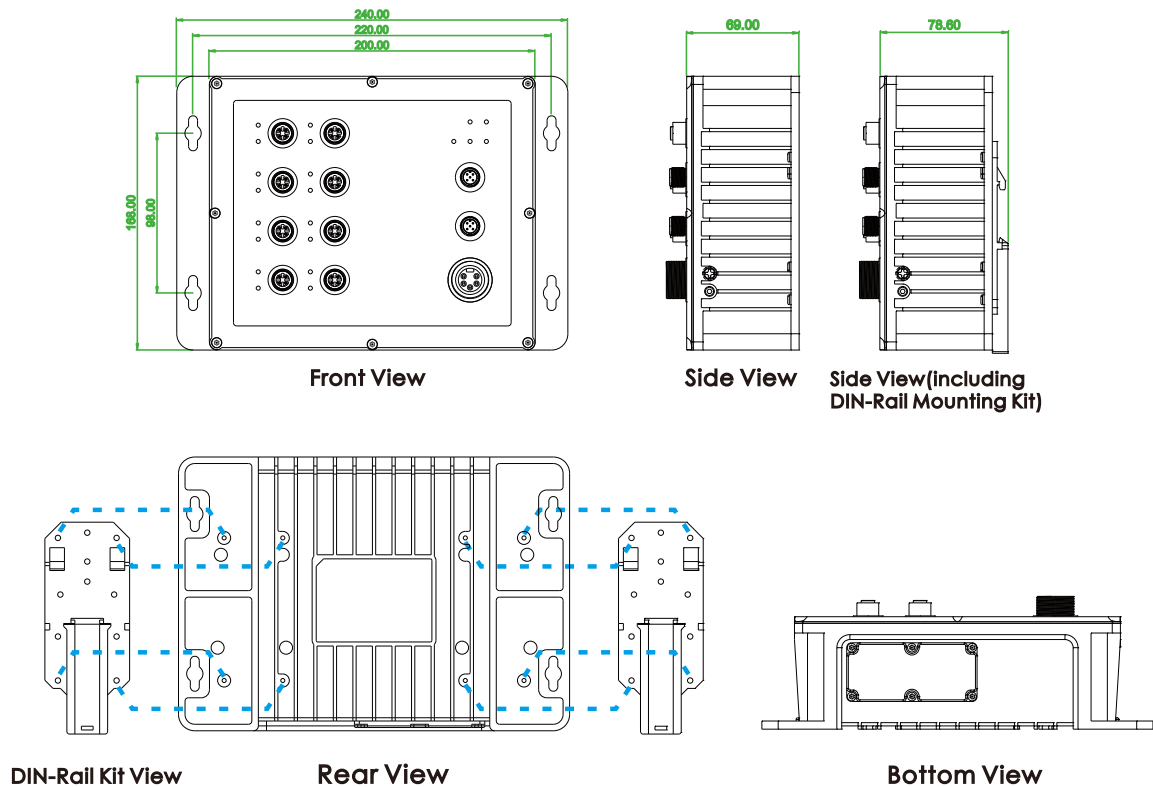

Ordering Information

Model Name	Managed	IP67	Total Port	UTP Port	Gigabit Port	PoE Port	PoE Total Power Budge	Input Voltage	Certification				Shock Vibration	Operating Temperature
				M12 10/100 Base-TX		IEEE 802.3at		24/48 VDC (20~57 VDC)	EN50155 EN50121-4	UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	IEC61373	
ITP-802GSM-8PH24	V	V	10	8	2 SFP	8	180W	V	V	Plan	V	V	V	-10~60 °C
ITP-802GSM-8PHE24	V	V	10	8	2 SFP	8	180W	V	V	Plan	V	V	V	-40~75 °C
ITP-802GTM-8PH24	V	V	10	8	2 UTP	8	180W	V	V	Plan	V	V	V	-10~60 °C
ITP-802GTM-8PHE24	V	V	10	8	2 UTP	8	180W	V	V	Plan	V	V	V	-40~75 °C
ITP-800M-8PH24	V	V	8	8	—	8	180W	V	V	Plan	V	V	V	-10~60 °C
ITP-800M-8PHE24	V	V	8	8	—	8	180W	V	V	Plan	V	V	V	-40~75 °C

Model Naming Rule

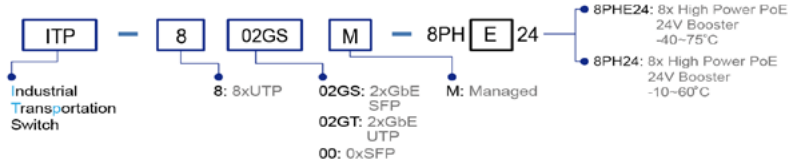

Optional Accessories

Industrial Power Supply


DRP-240-48 Industrial Power, Input 85 ~ 264VAC, Output 48VDC, 240W, -10 ~ +70°C

Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the ITP-G802SM-8PH24 for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)
(Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T7700-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)

SFP Naming Rule

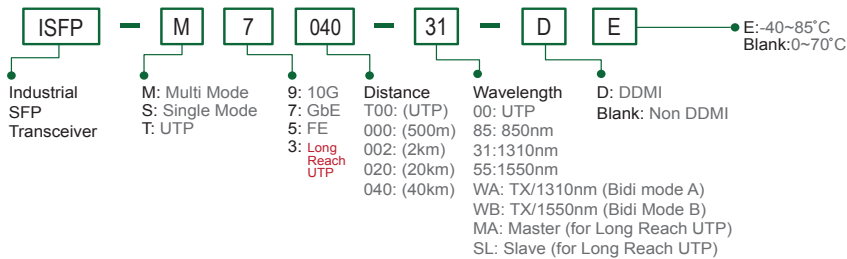

Optional Cable/Connector & Din-Rail Kit

P/N: CAB-M12AM8-RJ45

M12 A-code Male (8-Pin) to RJ-45, AWG 24, IP67, 1 meter



GbE port
(For ITP-802GTM-8PH24)

P/N: CAB-M12DM4-RJ45

M12 D-code Male (4-Pin) to RJ-45, AWG 24, IP67, 1 meter



For FE UTP

P/N: CAB-M12AF5-OPEN

M12 A-code Female (5-Pin) to open wire, AWG 22, IP67, 1 meter



For Alarm

P/N: CAB-M23F5-OPEN

M23 Female (5-Pin) to open wire, (AWG 16), IP67, 1 meter



For Power

P/N: M12A-M8

M12 A-code Male (8-Pin) connector, IP67



GbE port
(For ITP-802GTM-8PH24)

P/N: M12D-M4

M12 D-code Male (4-Pin) connector, IP67



For FE UTP

P/N: M12A-F5

M12 A-code Female (5-Pin) connector, IP67



For Alarm

P/N: IND-DNK04

Din Rail Kit for Industrial, Wide: 52mm



(130 X 52mm / 4 Screws) (2pcs/set)