

## MC-FXO-4-SC20A & MC-FXS-4-SC20B

### User Manual



#### 【Product introduction】

MC-FXO-4-SC20A and MC-FXS-4-SC20B are 4CH POTS over fiber converters using the most advanced digital multiplexing communications solutions and fiber optic transmission technology, which can transmit analog and PSTN telephones or Ethernet data signals on a single fiber in real-time synchronization, no distortion, high quality. Plug and play design makes installation easy, no need for field settings and adjustment. Please use FXO unit as a transmitter to connect with PBX analog phone lines and use FXS unit as a receiver to link with your telephone sets or fax machines.

#### 【Package List】

4 Channel POTS Converter: 1 pair (2 units)  
 AC90-260V to DC5V 2A Power Adapter: 2 pieces  
 User manual: 1 copy

#### 【Product Features】

- All-digital uncompressed transmission
- PCM Pulse Code Modulation
- Clear voice quality, stable and reliable calls
- Power and fiber optic link LED lights indicate the state of equipment
- Industrial grade design -35°C ~ +75°C
- 2 year standard warranty

#### 【Technical Parameters】

- Telephone Channel: 4

- Phone Connector: 4 x RJ-11 Jack
- Voice bandwidth: 8kHz
- Distortion: <1%
- Weighted noise: <63.7dBmop
- Signal to Noise Ratio: >95db
- Fast Ethernet Port: 1
- Maximum Bandwidth: 10/100Mbps
- Ethernet Connector: RJ45

#### FXS Telephone Mode

- Ring Voltage Peak: 110 - 150V
- Ringing Voltage: AC90±15V
- Ring Frequency: 22 - 28Hz
- Input impedance: 600Ω
- Return Loss: 20db
- Insertion Loss: -3±0.75dB
- Frequency characteristics: 300~3400Hz(-0.6~+3dB)
- Crosstalk attenuation: ≥65dB

#### FXO Switch Mode

- Ring Voltage: 35V - 150V
- Ring Frequency: 17 - 60Hz
- Input impedance: 600Ω
- Return Loss: 20dB

#### Optical Interface

- Bit rate: 155Mbps±20ppm
- Line code: NRZ+ Scrambler
- Wavelength: 850nm, 1310nm, 1550nm
- WDM 1310Tx/1550Rx (type A)
- 1550Tx/1310Rx (type B)
- Transmit optical power: >-12dBm
- Receiver sensitivity: <-30dBm
- Fiber connector: SC

#### 【Environmental Requirements】

- Operating Temperature: -35°C ~ +75°C
- Relative humidity: 0~95% (Non condensing)
- Power Input: AC90-260V to DC5V 2A
- MTBF: ≥100000h
- Dimensions: 120 x 115 x 28mm (W x D x H)
- Power Consumption: ≤10W (Input: DC5V 1A)
- Net Weight: 280g


#### 【LED Indicators】

Name	LED Indications	Status Descriptions
Power	Always ON	Power work normal
Fiber	OFF	Fiber doesn't pass
	ON	Fiber Link OK
Ethernet	Amber ON	Ethernet Connected
	Green ON	Data Transmission

#### 【Applications】

- ◆ Metro optical broadband network: Telecommunications, network System integration and other data network operators.
- ◆ Communications professional network: Applies to finance, government, oil, railway, electricity, public security, transportation, education and other industry professionals network.
- ◆ Multimedia transmission: Voice, data and integrated transmission.
- ◆ Resistance to harsh environments: Applicable to strong electromagnetic interference, long-distance network under harsh environments.

#### 【Connection Diagram】

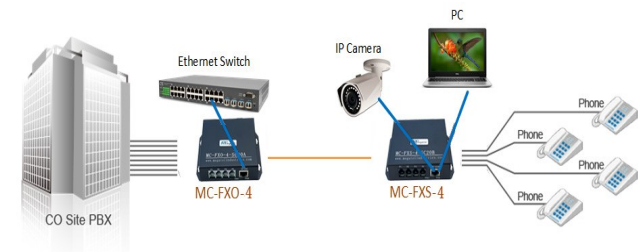

#### Ordering Information:

MC-FXO-4-SC20A and MC-FXS-4-SC20B:

Use one single mode fiber, SC and WDM transmission up to 20Km and use one multi-mode fiber and transmission up to 2Km.



**Megatel Industries Corporation**

**664 Wagner Court  
 North Wales, PA 19454  
 USA**

**Tel: 1-610-239-8812  
 Fax: 1-215-699-3348**

**Email: [Support@megatelindustries.com](mailto:Support@megatelindustries.com)  
[www.megatelindustries.com](http://www.megatelindustries.com)**