


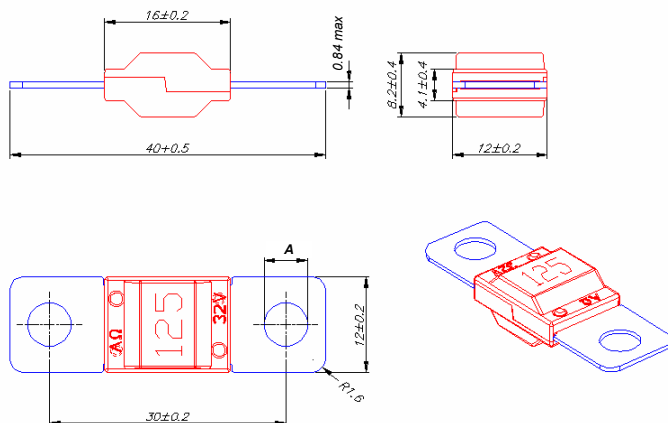

	≤125A	>125A
A	Hole for a bolt diameter of M5 and/or M6	Hole for a bolt diameter of M6


Standards :

- ISO 8820-5; 2007/03/01

Packaging :

- 1.500pz.

Example Strip fuse-links time-current curve (SF30 125A) :

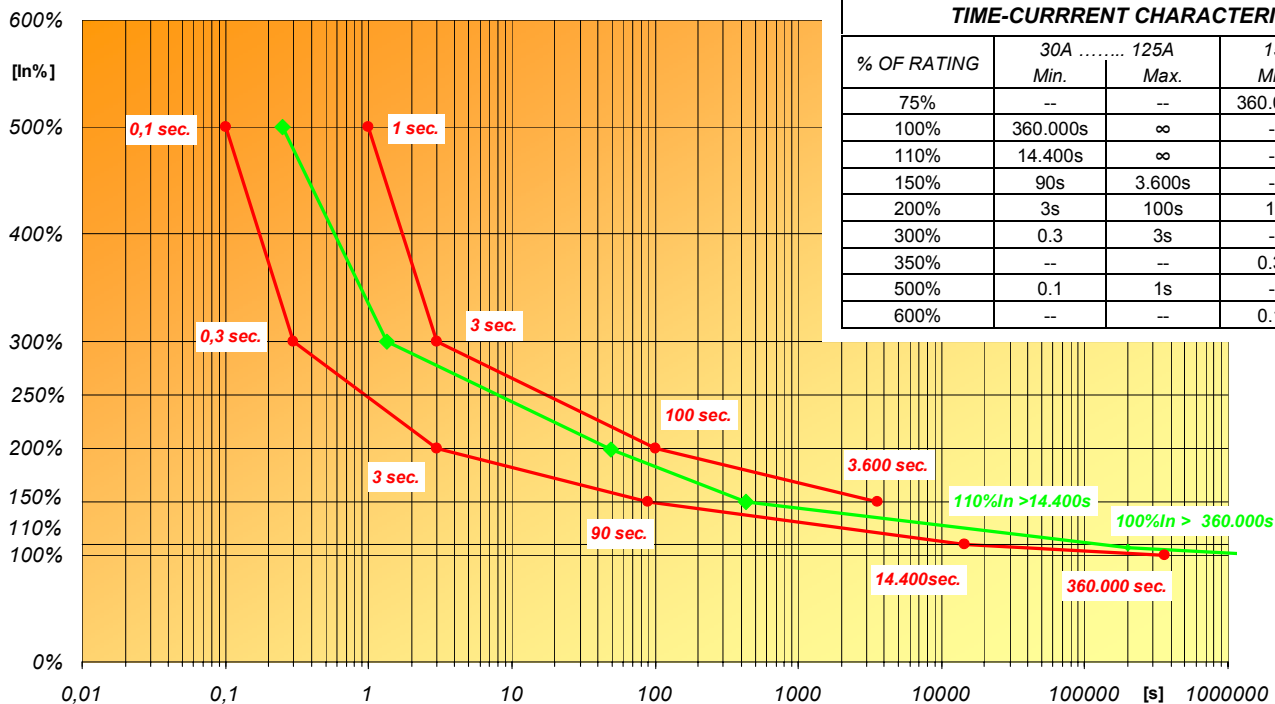

TIME-CURRENT CHARACTERISTICS				
% OF RATING	30A 125A Min. Max.	150A 200A Min. Max.		
75%	--	--	360.000s	∞
100%	360.000s	∞	--	--
110%	14.400s	∞	--	--
150%	90s	3.600s	--	--
200%	3s	100s	1s	15s
300%	0.3	3s	--	--
350%	--	--	0.3s	5s
500%	0.1	1s	--	--
600%	--	--	0.1s	1s

AΩ Part. No	Rated current	Rated voltage	Nominal cold resistance	Colour	Voltage Drop max.	Breaking capacity
70.030.0	30A	32V	1,48mΩ	Orange	105mV	2000A 32V DC
70.040.0	40A	32V	1,11mΩ	Green	90mV	
70.050.0	50A	32V	0,76mΩ	Red	80mV	
70.060.0	60A	32V	0,58mΩ	Yellow		
70.070.0	70A	32V	0,62mΩ	Brown		
70.080.0	80A	32V	0,52mΩ	White	75mV	Leackage current I _{max} : 0.5mA
70.100.0	100A	32V	0,43mΩ	Blue		
70.125.0	125A	32V	0,31mΩ	Pink		
70.150.0	150A	32V	0,28mΩ	Grey	70mV	
70.175.0	175A	32V	0,24mΩ	Light brown	70mV	
70.200.0	200A	32V	0,22mΩ	Violet	70mV	