
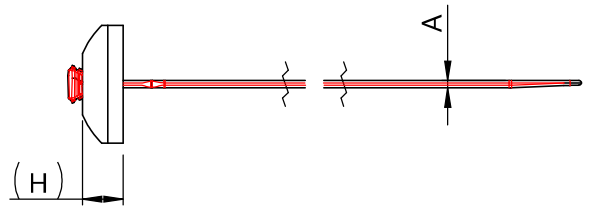
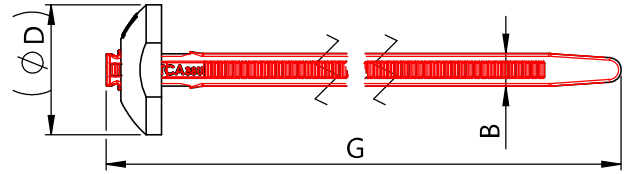



Revision level		Revision Record	Changed	Date	Approved	Date
Part	Drawing					
-	16.4	See ECN 311189	Patil	05/28/2024	Gallion	05/28/2024

NOTES:

1. LOOPED BUNDLE LOAD APPLIED INLINE WITH MOUNTING HOLE AXIS.
2. FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE.

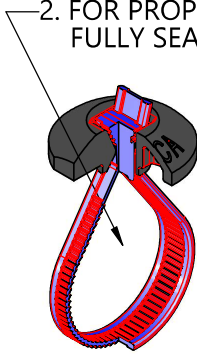

16.4

Global Part Description	Material	Color					
BT105R-PA66HS/PA66HIRHSUV-BK	Head - PA66HS Strap - PA66HIRHSUV	Black					
Bundle Dia. Range (mm)	A	B	D	G	H	Panel Hole Diameter (mm)	Min Loop Tensile Strength (Newtons) (1.)
6.4 to 66.7	1.3±0.2	5.6±0.25	22.2±0.6	244.4±8.0	7.0±0.5	6.0 to 17.3	467

See Table

Material

SW



Drawn PLN 01/12/2005
Approved GGG 02/10/2005

Scale 1:1
Title

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

HellermannTyton
Cable Management Products

7930 N. Faulkner Rd.
Milwaukee, WI 53224
Ph: (414) 355-1130
Fx: (414) 362-8338

**BT105R
Button Head Tie**

Drawing-No

CT05-046-005CST

Format
AH

Sheet 1 of 1

Dimension Units millimeters

PERFORMANCE SPECIFICATION