


# Versatile™ 4C Mailbox, 4C14D-13

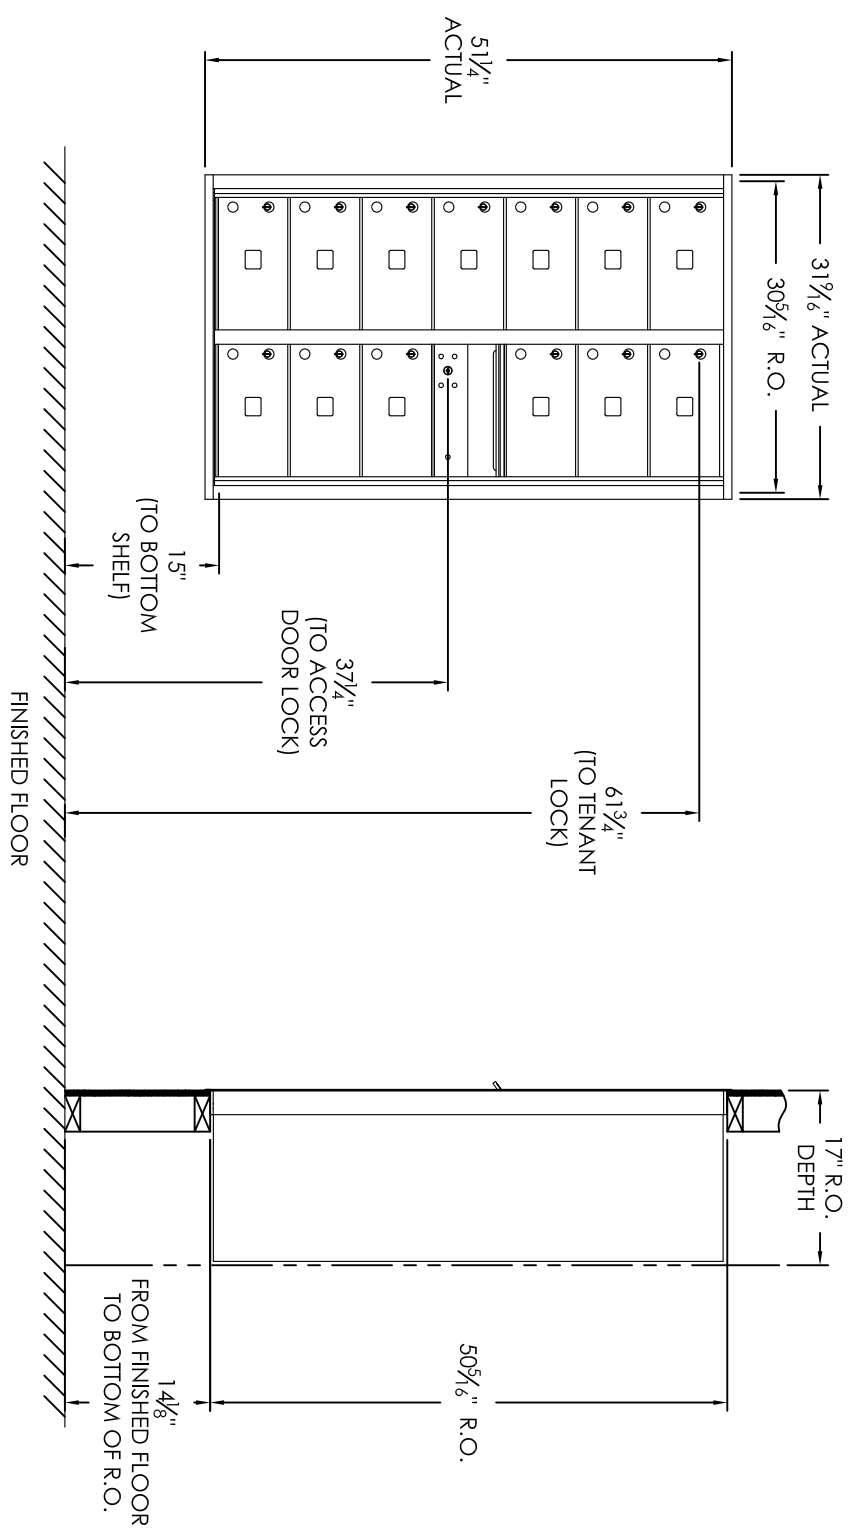

## COMPARTMENT CHART

| DESCRIPTION   | COMPARTMENT | COMPARTMENT SIZE         | QTY. |
|---------------|-------------|--------------------------|------|
| MAILBOX       | MB2         | 6-1/2" H x 12" W x 15" D | 13   |
| OUTGOING MAIL | OM2         | 6-1/2" H x 12" W x 15" D | 1    |

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

|                |            |               |         |
|----------------|------------|---------------|---------|
| MODEL          | 4C14D-13   | REV           | B       |
| SCALE          | NONE       | LAST REV DATE | 5/15/14 |
| DRAWING NUMBER | 4C14D-13CS | DRAWN BY      | RAK     |

### Notes:

- This module does NOT meet USPS STD-4C installation specification requirements as shown below:
  - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - No patron (tenant) lock shall be positioned more than 67" AFF.
  - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - The USPS Arrow lock shall be positioned 36"-48" AFF.
- This 4C mailbox is to be used for private applications.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1/8".