

# 5820



## Slimline Door/Window Contact Transmitter



Honeywell's 5820 Slimline Door/Window Contact Transmitter is nearly half size of standard door/window transmitters. It is ideal for casement and double-hung windows. The 5820 provides a single zone of protection, and installs easily on doors or windows with the included mounting hardware or double-side adhesive tape.

## FEATURES

- Sleek design is nearly half the size of competitors
- Easy-to-open case requires no special tools
- Case tamper protection (front and back)
- Ideal for double-hung windows

## SPECIFICATIONS

### Dimensions

- 3.0"H x 0.5"W x 0.8"D
- (76.2mm) x (12.7mm) x (20.3mm)

### Power Source

- 1.5VDC, AAA Alkaline battery

### Gap

- 0.5" (12.7mm) max distance

### Case Tamper Protection

- Front and back case tamper

### Operating Temperature

- 32°F to 122°F (0°C to 50°C) non-condensing

### Transmit Frequency


- 345 MHz

### Compatibility

- Compatible with all 5800 Series Wireless devices

### Agency Listings

- FCC
- IC
- cULus

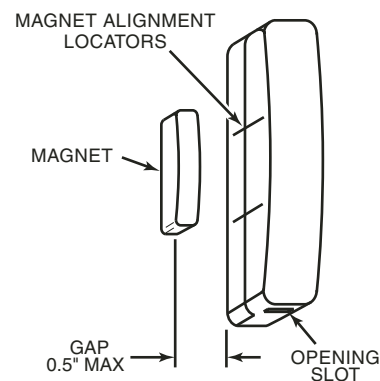

## ORDERING

**5820** Slimline Door/Window Contact Transmitter

### Honeywell Security & Custom Electronics

PO Box 9035, Syosset, NY 11791

[www.security.honeywell.com/sce](http://www.security.honeywell.com/sce)