


Structural Retention Tank Spec Sheet

Glass Water Systems

1-877-345-2770

Cutaway View

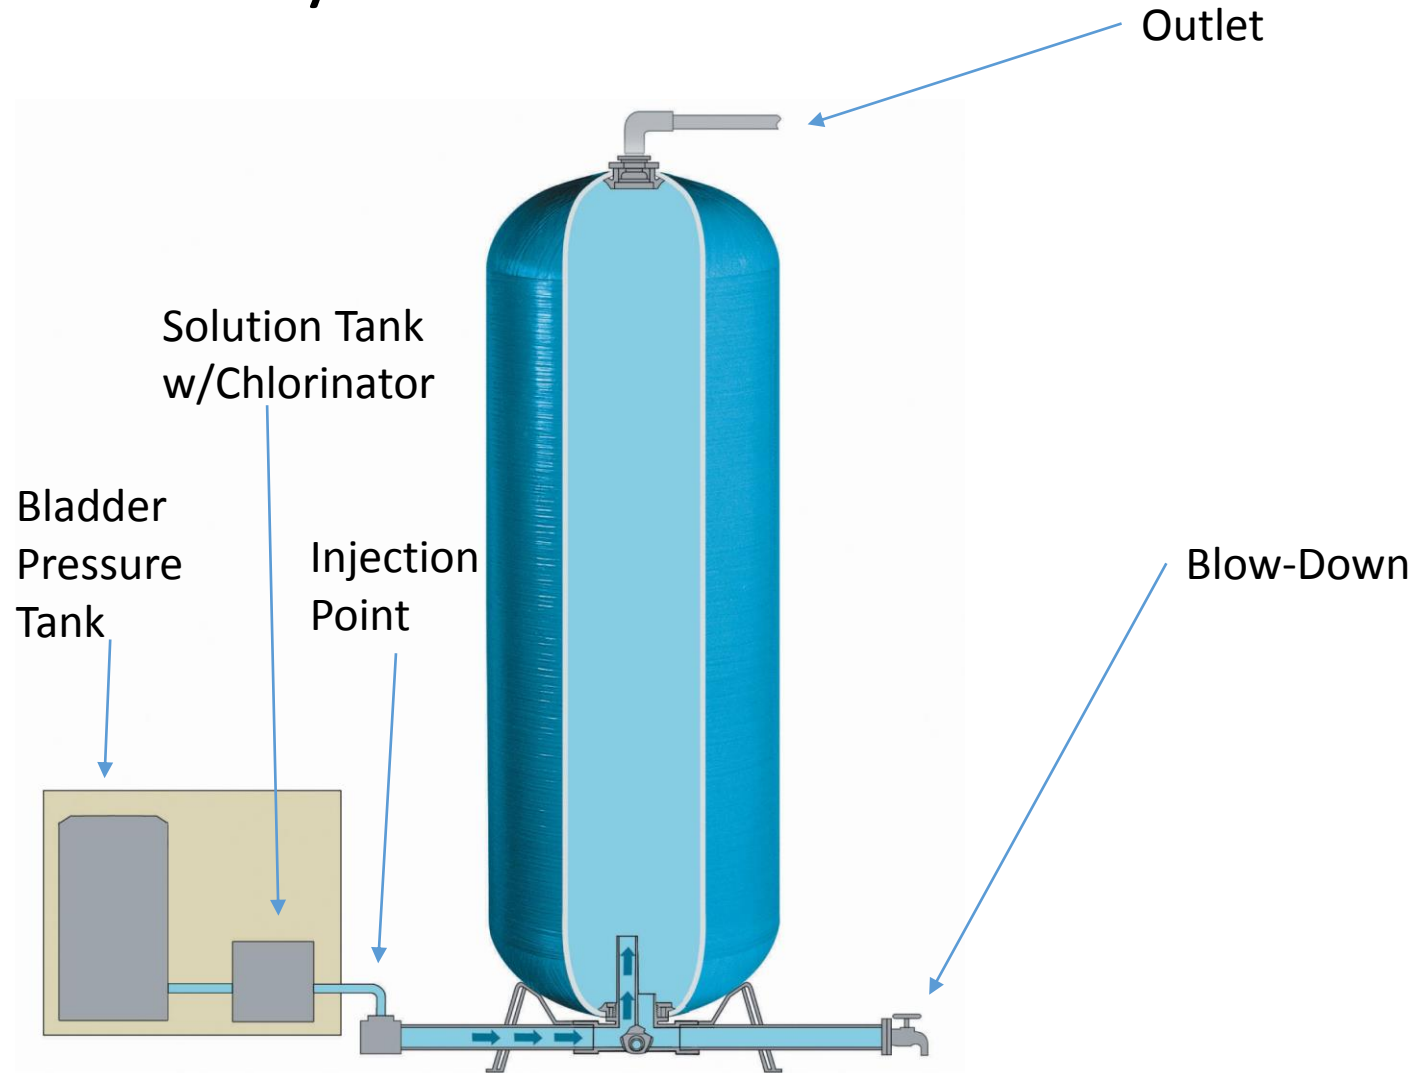

MUST HAVE A PRESSURE
RELIEF AND ANTI-VACUUM
VALVE ON TANK OR WARRANTY
WILL BE VOIDED

STRUCTURAL[®] RETENTION VESSELS

- **FEATURES/BENEFITS**

- Quick connect design
- Threadless connection eliminates potential for cross threading or over torquing
- Multiple plumbing connections available: brass or plastic, NPT, BSP, glued socket or sweat
- Vessel of choice for chemical treatment
- Provides optimal contact time
- Seamless inner shell of molded
- polyethylene for impact and corrosion resistance
- Miles of epoxy covered fiberglass filament for superior strength and lightweight
- Inlet/outlet PVC pipe connections offer application flexibility
- Adaptable for both new and replacement installation
- Additional drain port

SPECIFICATIONS

MODEL #	PART #	TOP CONNECTION	BOTTOM CONNECTION	DIMENSIONS	CAPACITY
CT-30	31534-1	1-1/4" socket Q.C.	1-1/4" male	16 x 44.5" (41 x 113 cm)	30 gal (113.5 L)
CT-40SQ	31533-1	1-1/4" socket Q.C.	1-1/4" male	21 x 36" (53 x 91 cm)	40 gal (151.2 L)
CT-40	31608-1	1-1/4" socket Q.C.	1-1/4" male	16 x 57.25" (40.6 x 145 cm)	40 gal (151.2 L)
CT-80	30957-1	1-1/4" socket Q.C.	1-1/4" male	21 x 62.75" (53 x 159 cm)	80 gal (302.4 L)
CT-120	31057-1	1-1/4" socket Q.C.	1-1/4" male	24 x 73.25" (61 x 186 cm)	120 gal (454 L)