

---

## AM-312 V04 Pole Mount - Prism Series Mount Installation Guide

### Compatible Prism Series Cameras

**ADC-VC7398PA**  
**ADC-VC8295P**

**ADC-VC7398PA**

**ADC-VC8498PA**  
**ADC-VC8498P**

**ADC-VC8295P**

**ADC-VC7398PA**

### Additional mounting accessories required

AM-71C\_V02 Waterproof Junction Box

AM-71K Outdoor Junction Box

AM-218 Wall-Mount Bracket

AM-719 Outdoor Junction Box

AM-528 Large Pendant Cap

AM-218 Wall-Mount Bracket

AM-719 Outdoor Junction Box

AM-52E Small Pendant Cap

N/A (direct installation)\*


## AM-312\_V04 Pole Mount



**\*Important:** The directly-attached installation configuration is less recommended due to the lack of built-in waterproofing and cabling protection. If utilizing a direct installation, make sure to properly wrap the rear-end cables and connectors with waterproof protection such as putties.

The AM-312\_V04 Pole Mount and other listed mounting accessories can be ordered through the Partner Portal's [Order Equipment page](#).


### In the box

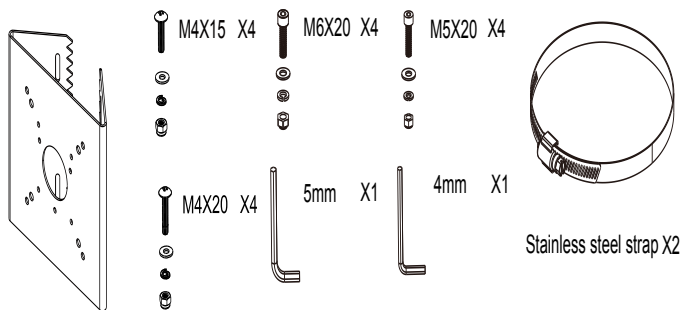



- AM-312\_V04 Pole Mount Bracket (60 mm or 90-152 mm)
- Stainless steel strap (x2)
- M6X20mm screws (x4)
- M5X20mm screws (x4)
- M4X20mm screws (x4)
- M4X15mm screws (x4)
- Hex L wrench 5 mm (x1)
- Hex L wrench 4 mm (x1)

## Mechanical drawings

AM-312\_V04\_60MM




AM-312\_V04\_90-152MM

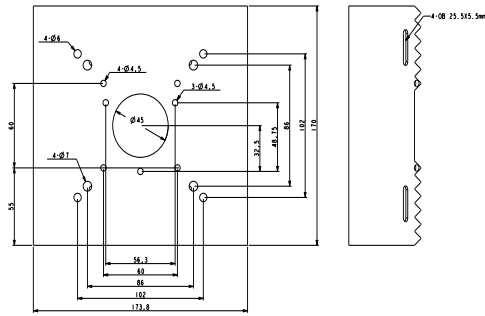

## Pre-installation

If you are installing a dome camera, the camera's cowl must be removed in order to install the video device. Retain the camera screws and cover for re-installation after cable routing and mounting is complete.

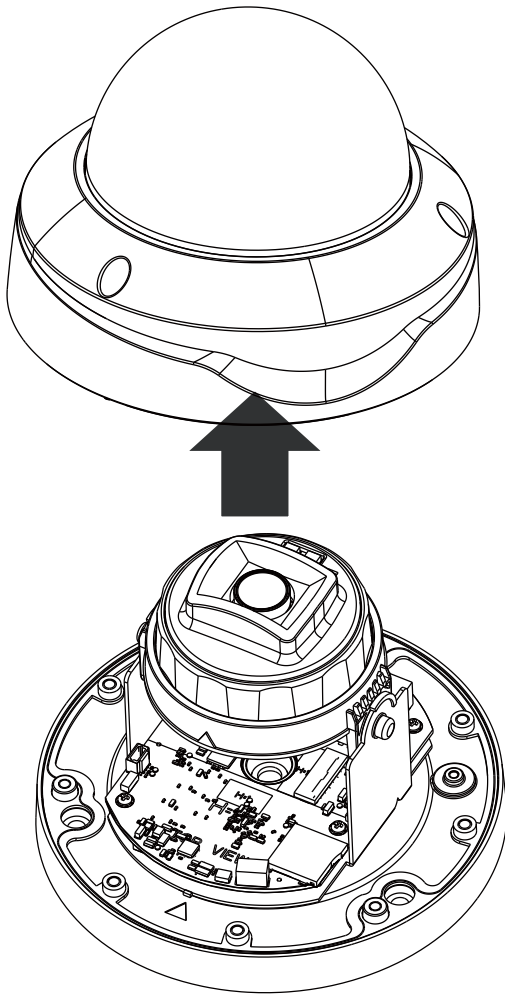



## Installation instructions

Verify you are using a compatible Prism Series Camera for the installation method you follow below.


### AM-71C\_V02 installation

**Important:** This installation method is compatible with the ADC-VC7398PA and ADC-VC8295P.

1. Pass the stainless steel straps through the bracket and around the pole.
2. Tighten the straps using a pincer plier and a flat-blade screwdriver.

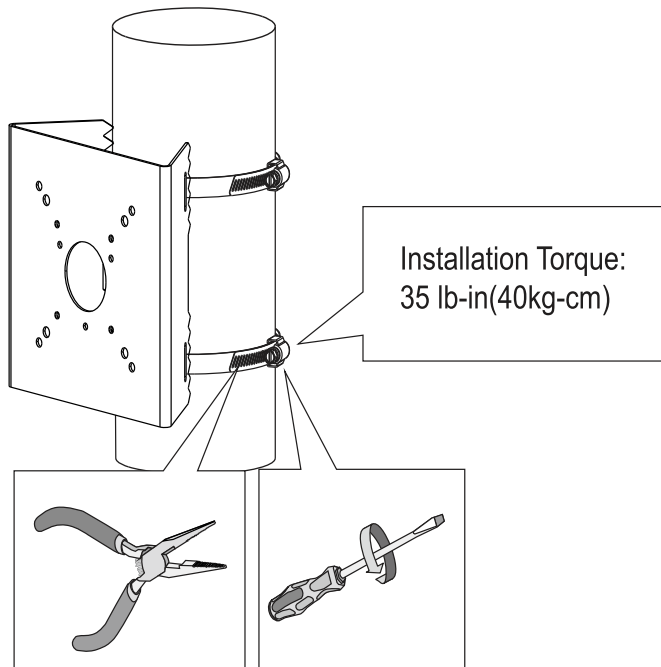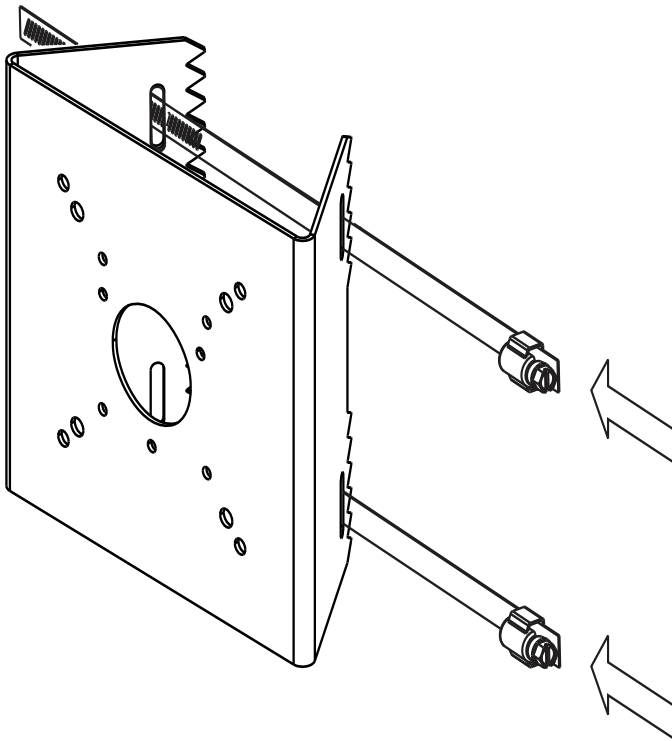

3. Secure the AM-71C conduit box to the bracket using the M5 screws, washers, and hex heads using a hex crescent wrench.


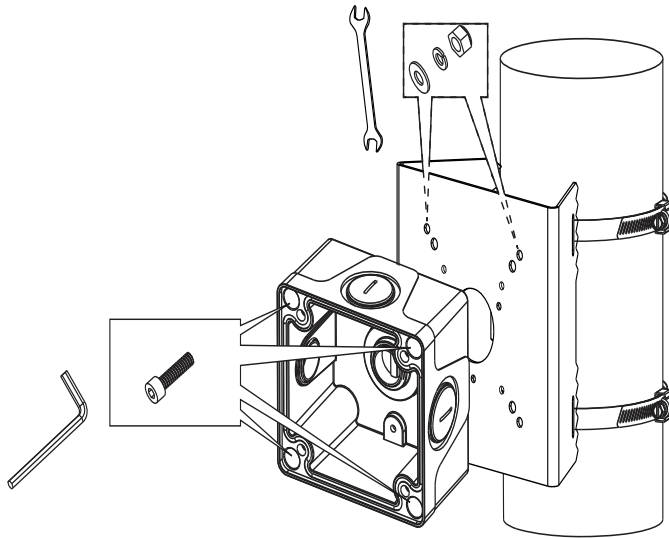


4. For instructions to continue installing the Prism Series Camera with the AM-71C, see [AM-71C\\_V02 Waterproof Junction Box - Prism Series Mount Installation Guide](#).


### **AM-218, AM-719, and Pendant Cap (AM-528 or AM-52E) installation**

**Important:** This installation method is compatible with the ADC-VC8295P, ADC-VC8498P, and ADC-VC8498PA.

1. Pass the stainless steel straps through the bracket and around the pole.
2. Tighten the straps using a pincer plier and a flat-blade screwdriver.

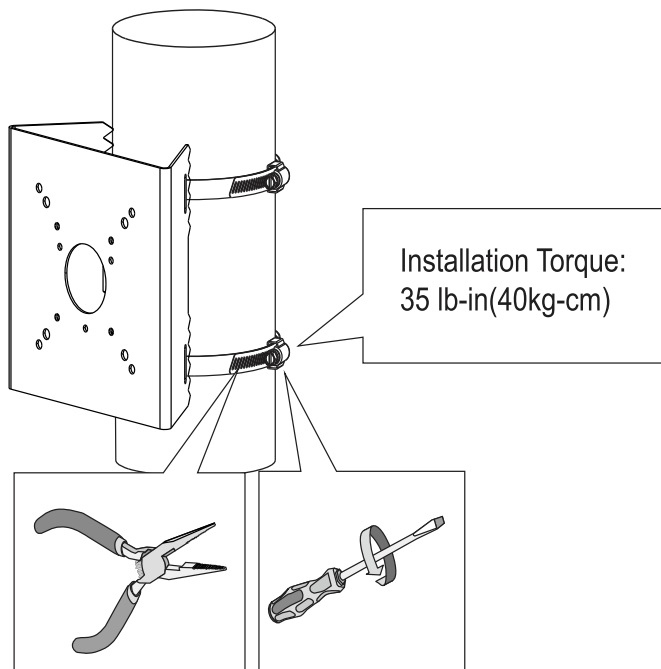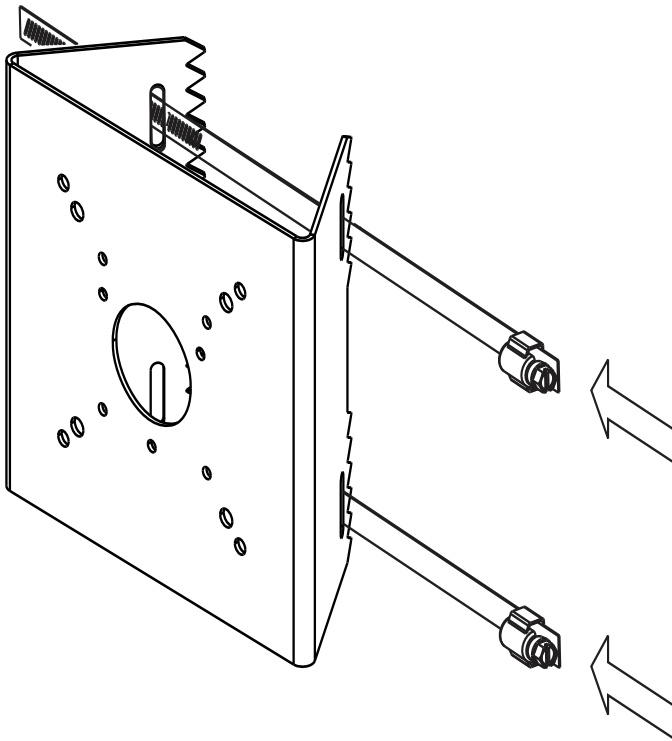

3. Secure the AM-719 conduit box to the bracket using the M5 screws, washers, and hex heads using a hex crescent wrench.

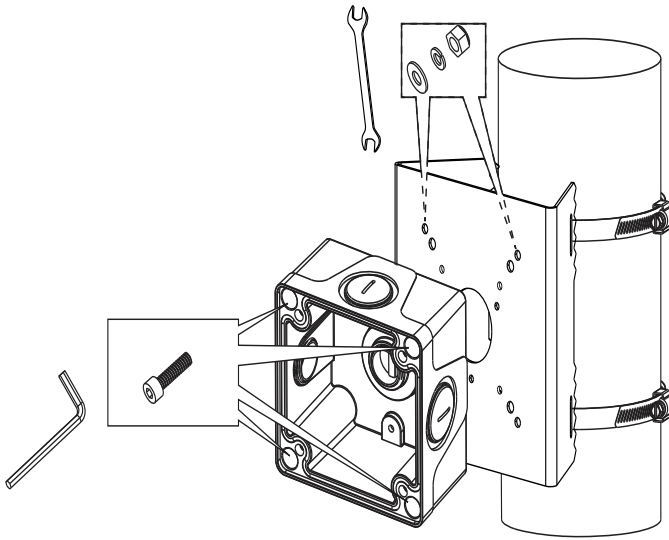

4. For instructions to continue installing the Prism Series Camera with the AM-218, see [AM-218 Wall Mount Bracket - Prism Series Mount Installation Guide](#).

## Additional resources

- For assistance with choosing the correct mounting accessories for your installation, see [Prism Series Camera Mounting Accessories](#).
- For steps and information about installing Prism Series Cameras, see [Prism Series Cameras - Installation Guide](#).