

## Smart Power Strip technical specifications.

Modified on: Mon, 18 Sep, 2017 at 12:42 PM

This page lists the technical specifications for **Smart Power Strip** (<http://aeotec.com/z-wave-power-strip>) and form part of the larger **Smart Power Strip user guide** (<https://aeotec.freshdesk.com/solution/articles/6000165753-smart-power-strip-user-guide->).

**Name:** Smart Power Strip

**Model number:** DSC11

**Gateway compatibility:** See Smart Power Strip on our **Z-Wave gateway compatibility** (<http://aeotec.com/z-wave-gateways>) page for further information


**Power input:** 120VAC, 60Hz only.

**Number of controllable ports:** 4


**Number of plugin sockets:** 6

**Energy Reading Outlets:** 6 and the sum of all outlets

#### 4 Channel of control (Multi Channel Basic CC ):

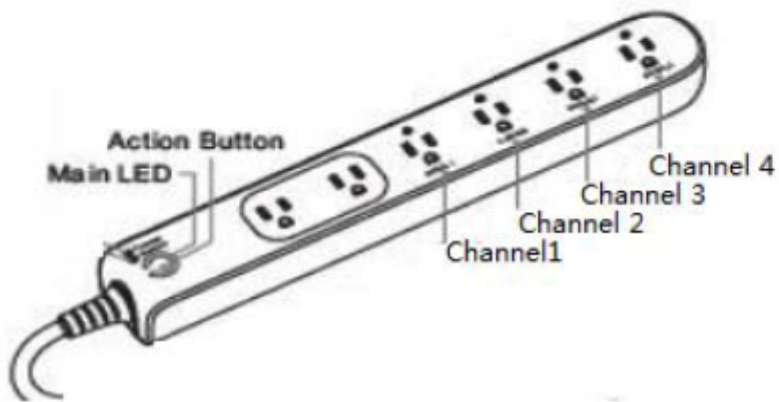

#### 6 Channel of electric measurement (Multi Channel Meter CC):

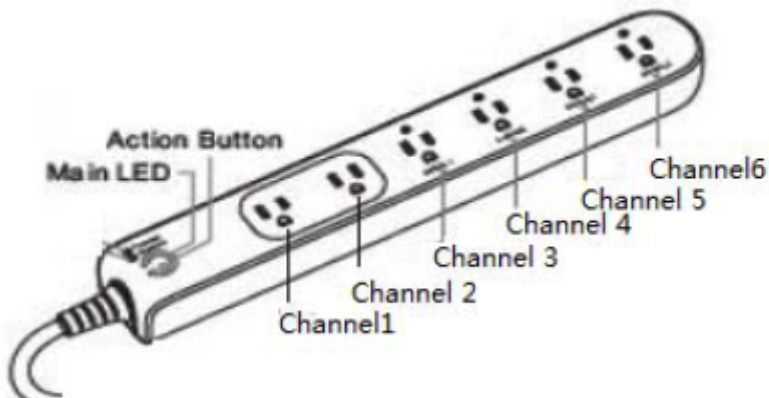

**Rated output:** Max 15A total between all 6 outlets.

**Max standby power:** <0.8W.

**Power measurement accuracy:** + or - 3W.

**Operating temperature:** 0°C to 40°C / 32°F to 104°F.

**Relative humidity:** 8% to 80%.

**Operating distance:** Up to 100 metres / 300 feet outdoors.