

IQ DOORBELL QUICK INSTALL GUIDE




OVERVIEW

The IQ Doorbell is a great way to make the home's existing doorbell unit "smarter". The IQ Doorbell wires effortlessly into an existing door bell using the included pre-stripped leads, and can support up to two separate doorbells, like the front and back door. Because each doorbell learns in as two different zones, you can program custom chimes and rules for each.

WIRING DIAGRAM

RED WIRE - FRONT
BLACK WIRE - TRANS
WHITE WIRE - REAR

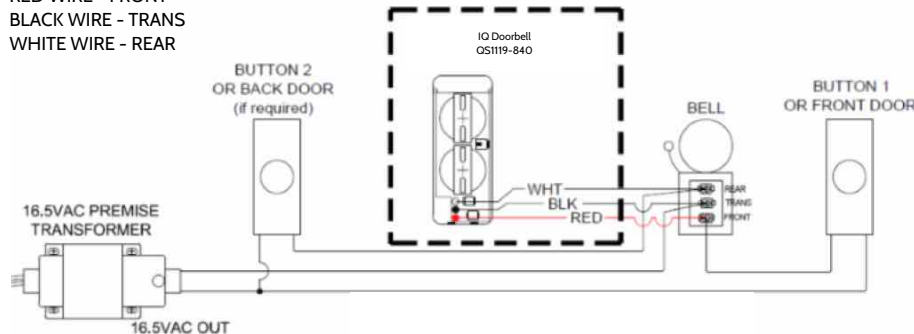

SPECIFICATIONS

Sensor: 2.5"H x 1"W x .5"D

Wireless signal range: 600ft (200M), open air.
Code outputs: tamper, tamper restore, alarm, alarm restore, low battery.

Transmitter frequency: 319.5 MHz

Unique code ID

Supervisory keep-alive interval: 70 minutes.

RF Peak field strength: typical 36000 uV/m at 3m

Operating Temperature: -10C-50C

Relative Humidity: 5-95% Non-Condensing

Storage Temperature: -40-80C

Replace battery with exact replacement every 5 years with 3V Lithium (x2).

- (2) -Panasonic CR2032
- Energizer CR2032
- Duracell DL2032

This is a quick guide for experienced installers only. For a detailed installation manual refer to the documentation found on the "Documentation" tab on <http://dealers.qolsys.com> (login required, request access at PortalAccess@Qolsys.com)

STEP 1 REMOVE BATTERY TABS



STEP 2 WIRE THE IQ DOORBELL



The IQ Doorbell leads wire to the doorbell chime's TRANS, FRONT & REAR (optional) terminals inside the house. Simply wire them inline with the existing doorbell button wires.

STEP 3 PLACING THE UNIT IN/ON THE DOORBELL CHIME



Use the supplied double sided adhesive tape to mount the IQ Doorbell on the doorbell chime. Make sure to put it in an area that still allows for the decorative cover to be replaced.

STEP 4 LEARN INTO PANEL



Touch "Settings"




Touch "Installation"



Touch "Security Sensors"



Touch "AutoLearn Sensor"



Tamper sensor by opening cover until you hear the panel chime



Select "Doorbell" as your sensor type and customize settings as desired, then touch Add



Test sensor to ensure proper function

**NOTE: If using a FRONT and REAR doorbell system, repeat Step 4 to learn in the IQ Doorbell a second time.*

Document#: IQDB-QG-04-15
Revision#: 5/26/15
Qolsys Product #: QS1119-840

Qolsys Inc. proprietary.
Reproduction without permission is not permitted.

GOT QUESTIONS?
CONTACT TECH SUPPORT
TechSupport@Qolsys.com