

RE606 Tilt, CryptiX™-Compatible

Features

- Alarm for anything that tilts.
- Useful for hatches, roll-up doors and even moveable assets.
- Cover tamper.
- Strong, reliable RF signal.
- 10-15 year battery life on CR123A battery.
- Low Battery indication.
- 3.3x1.4x1.1 inches.

Key Instructions

- Battery “+” faces towards spring.
- Normal Mounting position (non-alarm):
 - Straight up with battery at bottom, tamper switch at top.
 - Mounting upside down will cause over-sensitivity and false alarms.

Enrollment

- Place panel in enrollment mode.
- Tamper the device.

Operation

- Tilt

Alarm: When tilted more than 45 degrees from mounting position.


Tamper: when cover is opened.

Supervisory: every hour.

Specifications

Tilt Alarm Angle:	45 degrees +/- 15 degrees upwards cone
Tilt Operation Angles:	0 degrees (straight up) to 90 degrees (flat)
Tilt Element Technology:	Ball and contacts, non-mercury
Operational Life:	100,000 cycles
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	CR123A 1550 mAh
Temperature Range:	0F to 120F
Housing dimensions:	3.3x1.4x1.1 inches

Specifications subject to change without notice.



RE606 Tilt, CryptiX™-Compatible

Features

- Alarm for anything that tilts.
- Useful for hatches, roll-up doors and even moveable assets.
- Cover tamper.
- Strong, reliable RF signal.
- 10-15 year battery life on CR123A battery.
- Low Battery indication.
- 3.3x1.4x1.1 inches.

Key Instructions

- Battery “+” faces towards spring.
- Normal Mounting position (non-alarm):
 - Straight up with battery at bottom, tamper switch at top.
 - Mounting upside down will cause over-sensitivity and false alarms.

Enrollment

- Place panel in enrollment mode.
- Tamper the device.

Operation

- Tilt

Alarm: When tilted more than 45 degrees from mounting position.

Tamper: when cover is opened.

Supervisory: every hour.


Specifications

Tilt Alarm Angle:	45 degrees +/- 15 degrees upwards cone
Tilt Operation Angles:	0 degrees (straight up) to 90 degrees (flat)
Tilt Element Technology:	Ball and contacts, non-mercury
Operational Life:	100,000 cycles
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	CR123A 1550 mAh
Temperature Range:	0F to 120F
Housing dimensions:	3.3x1.4x1.1 inches

Specifications subject to change without notice.


Internal Picture

Shown in straight up, non-alarm mounting position.

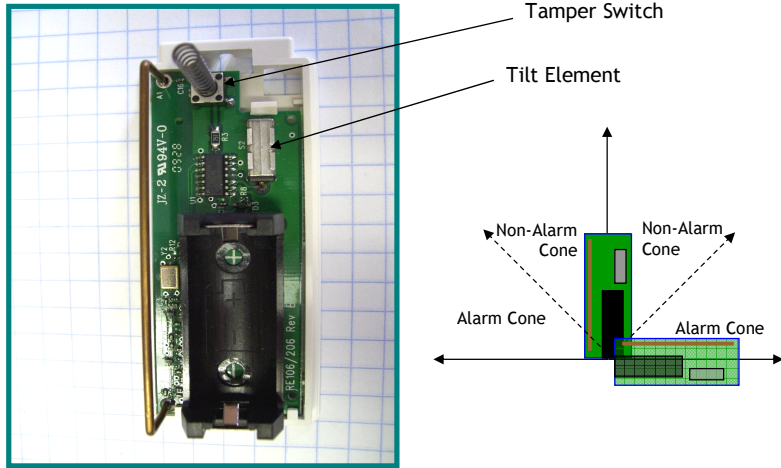

Internal Picture

Shown in straight up, non-alarm mounting position.

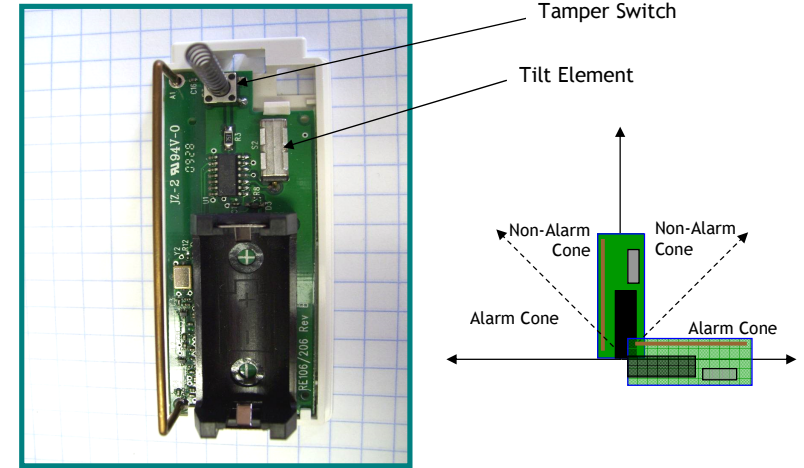

Notices

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
This device may not cause harmful interference.
This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE301

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) This device may not cause interference, and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE301

Notices

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
This device may not cause harmful interference.
This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE301

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) This device may not cause interference, and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE301