

2014 GENERAL CATALOGUE

Instruments for Water Analysis



pH

ORP

EC

TDS

DO

NaCl

Temp

Brix

NH₃-N

O₂/Kg

FNU

PO₄

Cl₂

Cl⁻

Fe






COMMITTED TO TOTAL CUSTOMER SATISFACTION

Milwaukee is a dynamic worldwide manufacturer of electrochemical Instrumentation for water analysis to measure pH, Redox, Conductivity, Salinity, Dissolved Oxygen, Temperature, Turbidity, Chlorine, Ammonia, Copper, Chloride, Phosphate, Iron, etc.

Milwaukee serves all markets where water quality measurements are required: Laboratory market, food and beverage, environmental, education and government, water and waste water treatment, pharmaceutical and biotechnology, chemical, agriculture and horticulture, hydroponics, aquariums, swimming pools, etc.

Thanks to your valuable feedback our R&D team has designed a new line of instruments - Martini Instruments - for laboratory and field measurements.

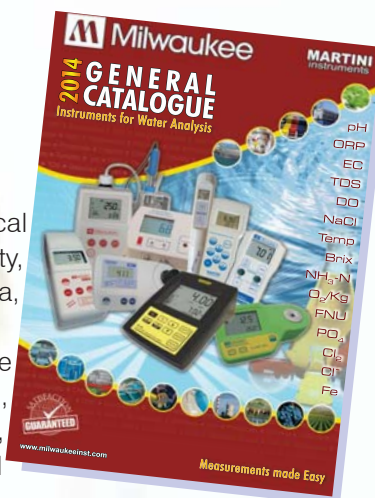

Many of our instruments combine 2 or more parameters providing added versatility and excellent value for money. With an extended range of products, from basic hand held instruments to high performance laboratory bench meters, Milwaukee products have a reputation for reliability and accuracy.

All of our instruments are supplied with probes, electrode holders, buffer solutions and most come in a hard carrying case (Martini portable meters and photometers) and are complete and ready for use.

Milwaukee Instruments are available worldwide through a selected network of distributors and associated companies that are committed to Total Customer Satisfaction.

Everyone in Milwaukee Instruments is committed to exceeding your expectations.

Global Offices



**Europe, South America, Africa,
Asia, Middle East and Pacific Rim**

Milwaukee Electronics Kft.

Alsóikötő sor 11.
H-6726 Szeged - HUNGARY
tel: +36 62 428 050
fax: +36 62 428 051
e-mail: sales@milwaukeeinst.com



United States of America

Milwaukee Instruments, Inc.

2950 Business Park Drive
Rocky Mount - NC 27804 - U.S.A.
tel: +1 252 443 3630
fax: +1 252 443 1937
e-mail: sales@milwaukeetesters.com

Beauty of

Symbols

CE	CE CE certified products
IP65	IP65 IP65 rated housing protects instrument from water and dust
GLP	GLP (Good Laboratory Practices) Good Laboratory Practices requires that time and date should be recorded with the parameters measured
USB	USB Port Communication is via opto-isolated USB port
RS232	RS232 Port Communication via opto-isolated RS232 port
Years warranty 2	2 Years Warranty Instruments are covered by 2 years warranty
Years warranty 3	3 Years Warranty Instruments are covered by 3 years warranty
Memorized buffers 7	7 pH Memorized buffers 7 pH Memorized buffers for calibration
MEM	MEM MEM key allows to memorize the last measurement
LOG	LOG LOG key allows to save up to 50 measurements
ALARM	ALARM A LED light warns the user in the event the reading is outside the set point
Points 2	2 Point Calibration Calibration can be performed at 1 or 2 points
Points 3	3 Point Calibration Calibration can be performed at 1, 2 or 3 points
MULTI	Multiparameter Instruments Instruments that measure more than 1 parameter
ATC	Automatic Temperature Compensation Automatically corrects the measured value based on the temperature of the solution
MTC	Manual Temperature Compensation Is a method for temperature compensation through the manual input of sample temperature value
AUTO Buffer	Auto-Buffer Auto-Buffer Recognition ensures that correct buffer values are used during calibration
Dual Display	Dual Level Display Displays simultaneously 2 parameters
Electrode Replaceable	Replaceable Electrode Instrument with replaceable electrode
Software CD	Software CD The instrument is supplied with an application software
Self diagnostics	Self-diagnostics Messages. Messages on the LCD to make the calibration easy and accurate
LED	LED The lightsource is the LED with different wave-lengths

Click to buy: www.eseasongear.com

Contents

New Products	2
pH/ORP/ISE/Temp Measurements	
pH/Temp Bench Meter	3
pH/ORP/Temp Bench Meter	4
pH/ORP/ISE/Temp Bench Meter	5
pH Electrodes	
pH Electrodes basic	6
pH/ORP/ISE/Temp Measurements	
pH/Temp Portable Meter (Professional)	10
pH/ORP/Temp Portable Meter (Professional)	11
Standard pH/ORP/Temp Portable Meters	12
pH Measurement in Meat	13
pH/Temp Pocket Testers (Professional)	14
pH/ORP/Temp Pocket Testers (Professional)	15
pH Monitors	16
pH/ORP Controllers	17
Conductivity/TDS/NaCl/Temp Measurements	
EC/TDS/NaCl/Temp Bench Meter	18
EC/TDS/NaCl/Temp Portable Meter (Professional)	19
Standard EC/TDS Portable Meters	20
EC/TDS/Temp Pocket Testers (Professional)	21
EC Monitors	22
TDS monitors	23
Dissolved Oxygen/Temp Measurements	
DO/Temp Bench Meter	24
DO/Temp Portable Meter (Professional)	25
Standard DO/Temp Portable Meter	26
Multiparameter Measurements	
pH/ORP/EC/TDS/NaCl/Temp Bench Meter	27
pH/EC/TDS/Temp Portable Meters (Professional)	28
Standard pH/EC/TDS Portable Meters	29
Light Measurements	
LUX Portable Meter	30
Colorimetric Measurements	
Free, Total Chlorine	31
& pH Portable Photometer	31
Ammonia, Iron	32
& Phosphate Portable Photometers	32
Free, Total Chlorine	33
& Chloride Portable Photometers	33
Handy Photometers: Free & Total Chlorine	34
Handy Photometers: Phosphate, Iodine, Iron	35
Peroxide Value	36
Turbidity Measurements	
Turbidity Portable Meter	37
Refractometers	
Digital Refractometers for Brix, Fructose, Glucose and Invert Sugar Measurements	38
Digital Refractometers for Wine and Grape Product Measurements	39
Digital Refractometer for Sodium Chloride Measurements	40
Digital Refractometer for Seawater Measurements	41
Digital Refractometer for Ethylene Glycol Measurements	42
Economical Pocket-Testers	43
Thermometers & NPK Test Kit	44
pH Measurement in Soil	45
Electrodes & Probes	46
Electrode selection guide	47
Calibration, Maintenance & Cleaning Solutions	48

Simplicity

Click to buy: www.eseasongear.com

Highlights in this Catalogue

pH Measurement in Meat and in Soil

A step by step guide with pictures, how to measure pH values in meat or in soil.

New



New

New Line of pH/ORP/EC and TDS Monitors and Controllers

The new MC Monitors are designed to continuously monitor pH, ORP, EC or TDS values directly in your reservoir. Each unit features a user selectable set-point. An LED visual alarm is activated and flashes when the pH, ORP, EC or TDS level rises either Above or Below (user selected) that set-point.

The new Milwaukee MC Controllers have a user selectable set point and a visual "Power Activated" LED notification light. Power to the controller box is turned on when the reading is Above or Below (user selected) the selected set point. These MC Controllers are ideal for CO₂ or ozone dosing.

Mi180: Multi parameter pH, ORP, Conductivity, TDS, NaCl and Temperature Bench Meter.

Mi180 measures 6 different parameters: pH, ORP, EC, TDS (Total Dissolved Solids), percentage of NaCl and temperature in a variety of ranges. pH calibration can be performed in 3 points selectable between 7 memorized buffers, to provide a very accurate calibration curve even when testing different samples, where very wide differences in pH can be found.

The auto-ranging feature for EC and TDS measurements automatically sets the resolution suitable to the tested sample. All measurements can be temperature compensated at 20 or 25°C and the compensation coefficient is selectable by the user. The automatic temperature compensation can also be disabled for measuring the actual conductivity value.

The stability indicator on the LCD ensures accuracy. Conductivity readings are performed with the 4-ring probe supplied with the meter. The GLP feature allows users to store and recall data on system status. PC compatible through an RS232 port or USB.



New



MA871: Digital Brix Refractometer.

The MA871 is an optical instrument that employs the measurement of refractive index to determine the % Brix of sugar in aqueous solutions. The method is both simple and quick. Samples are measured after a simple user calibration with deionized or distilled water. Within seconds the instrument measures the refractive index of the sample and converts it to % Brix concentration units.

The MA871 digital refractometer eliminates the uncertainty associated with mechanical refractometers and is easily portable for measurements in the field.

New

Mi150

pH/Temperature Laboratory Bench Meter

Mi150 is an advanced pH/Temp microprocessor-based bench meter. It is ideal for students and technicians who need fast and reliable measurements.

This meter is provided with a series of new diagnostic features which add an entirely new dimension to the measurement of pH, by allowing the user to dramatically improve the reliability of the measurement:

- Automatic Temperature Compensation (ATC) for good accuracy under fluctuating temperatures;
- Easy to read large custom LCD;
- Easy and Quick Push-button Calibration
- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for calibration;
- Messages on the LCD to make the calibration easy and accurate;
- User-selectable "calibration time out" to remind when a new calibration is necessary;
- Stability Indicator prompts whenever reading stabilizes.

Moreover, it offers an extended temperature range from -20°C (-4°F) to 120°C (248°F), using the MA831R interchangeable temperature probe.

Years
warranty
3**MEM****ATC****MTC**Points
2**Dual
Display****Self
diagnostics**Memorized
buffers
7**CE**

Specifications		Mi150
Range	pH	-2.00 to 16.00 pH
	Temp	-20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH	0.01 pH
	Temp	0.1°C (0.1 °F)
Accuracy (@20°C / 68°F)	pH	±0.01 pH
	Temp	±0.4°C / ±0.8°F
Typical EMC Deviation	pH	±0.02 pH
	Temp	±0.4°C / ±0.8°F
pH Automatic Calibration		1 or 2 point-calibration, with 7 memorized buffers
Offset Calibration		±1 pH
Slope Calibration		from 80 to 108%
Temperature Compensation		automatic, from -20.0 to 120.0°C / -4.0 to 248.0°F or manual, without temperature probe
pH Electrode		MA917B/1 (included)
Temperature Probe		MA831R (included)
Environment		0 to 50°C / 32 to 122°F; max RH 95%
Input Impedance		10 ¹² Ohm
Power supply		12 VDC power adapter (included)
Dimensions		230 x 160 x 95 mm
Weight		0.9 kg

Accessories

- MA9001** pH 1.68 buffer solution, 230 mL bottle
MA9004 pH 4.01 buffer solution, 230 mL bottle
MA9006 pH 6.86 buffer solution, 230 mL bottle
MA9007 pH 7.01 buffer solution, 230 mL bottle
MA9009 pH 9.18 buffer solution, 230 mL bottle
MA9010 pH 10.01 buffer solution, 230 mL bottle
MA9012 Refilling solution for double junction electrode, 230 mL bottle
MA9015 Electrode storage solution, 230 mL bottle



- MA9016** Electrode cleaning solution, 230 mL bottle
MA9112 pH 12.45 buffer solution, 230 mL bottle
MA9310 12 VDC Adapter, 220 V
MA9311 12 VDC Adapter, 110 V
MA9315 Electrode Holder
MA917B/1 Glass body, double junction refillable pH electrode
MA831R Temperature probe

Glass Electrode & Temperature Probe

Choose from our wide selection of pH and ORP electrodes at pages 6 and 45.



Innovative Design

Compact-size ergonomic design with electrode holder that can hold multiple electrodes & probes.



Ordering Information

Mi150 is supplied complete with:

- **MA917B/1** Double junction refillable pH electrode
- **MA831R** Temperature Probe
- **MA9315** Electrode Holder
- **M10004** pH 4.01 Sachet Buffer Solution
- **M10007** pH 7.01 Sachet Buffer Solution
- **M10010** pH 10.01 Sachet Buffer Solution
- **M10016** Sachet Electrode Cleaning Solution
- Graduate Pipet
- 12 VDC Adapter
- Instruction manual

Click to buy: www.eseasongear.com

Mi151 pH/ORP/Temperature Laboratory Bench Meter

- Years warranty
3
- MEM**
- ATC
- MTC
- Points
2
- Dual Display
- Self diagnostics
- Memorized buffers
7
- CE**



This high performance economy microprocessor-based pH/ORP/Temp Bench meter is an ideal tool in schools, laboratories and production plants. It is provided with a series of new diagnostic features which add an entirely new dimension to the measurement of pH, by allowing the user to dramatically improve the reliability of the measurement:

- Automatic Temperature Compensation (ATC) for good accuracy under fluctuating temperatures;
- Hold Function freezes reading for easy viewing;
- Easy to read large custom LCD;
- Stability Indicator prompts whenever reading stabilizes;
- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for calibration;
- Messages on the LCD to make the calibration easy and accurate;
- User-selectable "calibration time out" to remind when a new calibration is necessary.

Mi151 can also measure with ORP electrodes, thanks to its capability to measure mV with a resolution up to 0.1 mV. For accurate measurements, use the electrode holder supplied with the meter.

Specifications		Mi151
Range	pH	-2.00 to 16.00 pH
	mV	±699.9 mV / ±1999 mV
	Temp	-20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH	0.01 pH
	mV	0.1 mV / 1 mV
	Temp	0.1°C (0.1°F)
Accuracy (@ 20°C)	pH	±0.01 pH
	mV	±0.2 mV / ±1 mV
	Temp	±0.4°C / ±0.8°F
Typical EMC Deviation	pH	±0.02 pH
	mV	±0.2 mV / ±1 mV
	Temp	±0.4°C / ±0.8°F
pH Automatic Calibration	1 or 2 point-calibration, with 7 memorized buffers	
Offset Calibration	±1 pH	
Slope Calibration	from 80 to 108%	
Temperature Compensation	automatic, from -20.0 to 120.0°C / -4.0 to 248.0°F or manual, without temperature probe	
pH Electrode	MA917B/1 (included)	
Temperature Probe	MA831R (included)	
Environment	0 to 50°C / 32 to 122°F; max RH 95%	
Input Impedance	10 ¹² Ohm	
Power supply	12 VDC power adapter (included)	
Dimensions	230 x 160 x 95 mm	
Weight	0.9 kg	



Glass Electrode & Temperature Probe

Choose from our wide selection of pH and ORP electrodes at pages 6 and 45.

Custom dual level LCD

Large and easy-to-read Custom dual level LCD Display with simultaneous readings and with user-friendly icons.



Accessories

- MA9001 pH 1.68 buffer solution, 230 mL bottle
- MA9004 pH 4.01 buffer solution, 230 mL bottle
- MA9006 pH 6.86 buffer solution, 230 mL bottle
- MA9007 pH 7.01 buffer solution, 230 mL bottle
- MA9009 pH 9.18 buffer solution, 230 mL bottle
- MA9010 pH 10.01 buffer solution, 230 mL bottle
- MA9012 Refilling solution for double junction electrode, 230 mL bottle
- MA9015 Electrode storage solution, 230 mL
- MA9016 Electrode cleaning solution, 230 mL
- MA831R Temperature probe



- MA9112 pH 12.45 buffer solution, 230 mL bottle
- MA9310 12 VDC Adapter, 220 V
- MA9311 12 VDC Adapter, 110 V
- MA9315 Electrode Holder
- MA917B/1 Glass body, double junction refillable pH electrode
- MA921B/1 Platinum ORP electrode with 1 m cable (will be replaced by SE300)
- SE300 Platinum ORP electrode with 1 m cable

Ordering Information

Mi151 is supplied complete with:

- MA917B/1 Double junction refillable pH electrode
- MA831R Temperature Probe
- MA9315 Electrode Holder
- M10004 pH 4.01 Sachet Buffer Solution
- M10007 pH 7.01 Sachet Buffer Solution
- M10010 pH 10.01 Sachet Buffer Solution
- M10016 Sachet Electrode Cleaning Solution
- Graduate Pipet
- 12 VDC Adapter
- Instruction manual

Click to buy: www.eseasongear.com

Mi160

pH/ORP/ISE/Temperature Laboratory Bench Meter

This new pH/ORP/ISE/Temp bench meter is ideal for very accurate and precise measurements for all laboratory needs. It can perform ion-selective measurements directly in ppm, as well as pH, ORP and temperature measurements. pH calibration can also be performed in 3 points selectable between 7 memorized buffers, to provide a very accurate calibration curve even when testing different samples, where very wide differences in pH can be found.

Thanks to the memory it can store up to 50 data sets for each range that can be downloaded to a PC via RS232 or USB. These instruments also have GLP features so, at any time, the user can recall the calibration data.

- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for pH calibration
- pH calibration up to 3 points
- ISE calibration up to 2 points; six standard solutions available: 0.01, 0.1, 1, 10, 100, 1000 ppm
- Messages on the LCD to make the calibration easy and accurate
- Relative mV feature
- GLP feature, to view last calibration data for pH or ISE



Specifications		Mi160
Range	pH	-2.00 to 16.00 pH
	mV	±699.9 mV / ±2000 mV
	ISE	0.001 to 19999 ppm
	Temp	-20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH	0.01 pH
	mV	0.1 mV / 1 mV
	ISE	0.001 (0.001 to 9.999) ppm; 0.01 (10.00 to 99.99) ppm; 0.1 (100.0 to 999.9) ppm; 1 (1000 to 9999) ppm
	Temp	0.1°C / 0.1°F
Accuracy (@20°C)	pH	±0.01 pH
	mV	±0.2 mV / ±1 mV
	ISE	±0.5% Full Scale
	Temp	±0.4°C / ±0.8°F
Rel mV offset		±2000 mV
pH Calibration		1, 2 or 3 point-calibration, with 7 memorized buffers
ISE Calibration		1 or 2 point calibration, 6 standard solutions available
Temperature Compensation		automatic, from -20.0 to 120.0°C / -4.0 to 248.0°F or manual, without temperature probe
pH Electrode		MA917B/1 (included)
Temperature Probe		MA831R (included)
Logging		up to 50 records, LOG on demand or auto-logging
Environment		0 to 50°C / 32 to 122°F; max RH 95%
Input Impedance		10 ¹² Ohm
Power Supply		12 VDC power adapter (included)
Dimensions		230 x 160 x 95 mm
Weight		1.1 kg

Accessories

- MA9004** pH 4.01 buffer solution, 230 mL bottle
MA9007 pH 7.01 buffer solution, 230 mL bottle
MA9010 pH 10.01 buffer solution, 230 mL bottle
MA9015 Electrode storage solution, 230 mL
MA9016 Electrode cleaning solution, 230 mL
MA9112 pH 12.45 buffer solution, 230 mL bottle
MA831R Temperature probe
MA9310 12 VDC Adapter, 220 V
MA9311 12 VDC Adapter, 110 V
MA9315 Electrode Holder



- MA917B/1** Glass body, double junction refillable pH electrode
MA921B/1 Platinum ORP electrode with 1 m cable (will be replaced by **SE300**)
SE300 Platinum ORP electrode with 1 m cable
MA9350 RS232 connection cable with 2 m cable
Mi5200 Application Software

Easy PC Compatibility

RS232 or USB communication interface allows readings to be downloaded to a serial port.



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Ordering Information

Mi160 is supplied complete with:

- **MA917B/1** Double junction refillable pH electrode
- **MA831R** Temperature Probe
- **MA9315** Electrode Holder
- **M10004** pH 4.01 Sachet Buffer Solution
- **M10007** pH 7.01 Sachet Buffer Solution
- **M10010** pH 10.01 Sachet Buffer Solution
- **M10016** Sachet Electrode Cleaning Solution
- **Mi5200** Application Software
- **MA9350** RS232 connection cable with 2 meters cable

Click to buy: www.easeongear.com

pH Electrode basics

CE




Milwaukee has a wide assortment of pH and ORP electrodes to meet all your specific requirements. Finding the right electrode for a specific application is a very important task and in order to solve this selection problem it is important to consider the following:

- Glass body electrode versus Epoxy (plastic) body electrode:** Glass body electrodes stand higher temperatures (typically 100°C against 80°C for plastic) and are more resistant to corrosive chemicals and solvents. They are easier to clean and are available in different shapes depending on the application. On the other hand plastic body electrodes are more rugged and the glass bulb is better protected.
- Gel filled electrodes versus refillable electrodes:** refillable electrodes last longer since electrolyte can be changed for repeated usage. The response is faster due to a greater outflow of electrolyte into the sample and therefore less likely to clog. Gel filled electrodes require less maintenance and resist to higher pressure.
- Double reference junction versus Single junction reference:** Double junction reference electrodes have a longer life and protects the sample measured from silver contamination from the electrolyte. The Silver wire is more protected and therefore gets less contaminated. The single junction electrodes normally cost less and are ideal for general purpose applications
- Conic shaped versus Sphere shaped:** The conic-shaped electrode is easier to clean and to maintain (ideal for applications such as dairy). Has a more rugged tip and therefore ideal for penetration. The sphere-shaped has a faster response time due to the larger surface area on the bulb.

pH electrodes are constructed from a special composition glass which senses the hydrogen ion concentration. This glass is typically composed of alkali metal ions. The alkali metal ions of the glass and the hydrogen ions in solution undergo an ion exchange reaction, generating a potential difference. In a combination pH electrode, the most widely used variety, there are actually two electrodes in one body. One portion is called the measuring electrode, the other the reference electrode. The potential generated at the junction site of the measuring portion is due to the free hydrogen ions present in solution.

The potential of the reference portion is produced by the internal element in contact with the reference fill solution. This potential is always constant. In summary, the measuring electrode delivers a varying voltage and the reference electrode delivers a constant voltage to the meter. The voltage signal produced by the pH electrode is a very small, high impedance signal. The input impedance requires to be interfaced only with equipment with high impedance circuits.

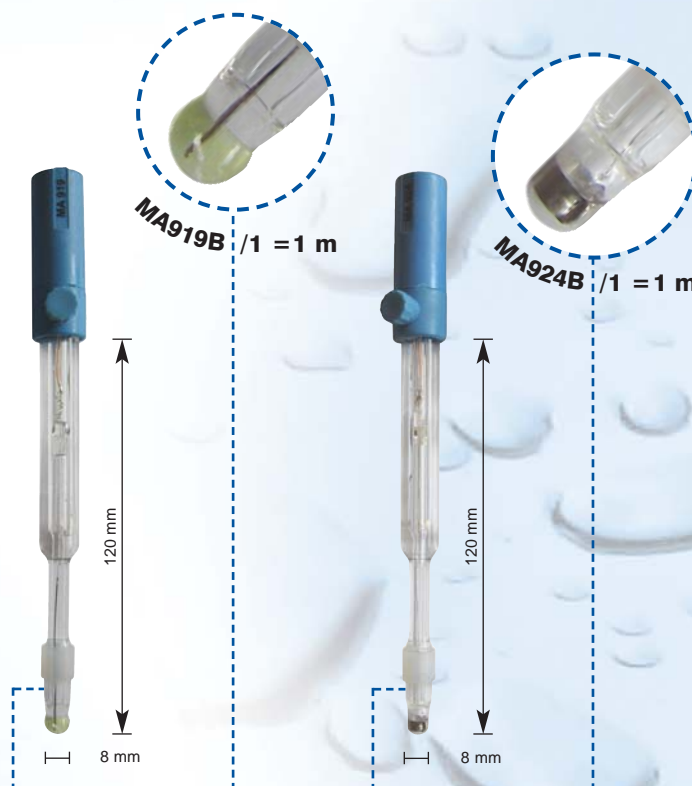

Model	MA919B/1	MA924B/1
Measuring Range	0 to 13 pH	±2000 mV
Temperature Range	-5 to 40 °C (23 to 104°F)	20 to 40 °C (68 to 104°F)
Shaft material	glass	glass
Reference Electrolyte	KCL 3.5M	KCL 3.5M
Reference Junction	open	open
Reference Type	double Ag/AgCl	double Ag/AgCl
Shape of membrane	spheric	Platinum ring
Max. Pressure	0,1 bar	0,1 bar
Connector type	BNC	BNC
Cable length	coaxial 1 meter	coaxial 1 meter
Shaft length	120 mm	120 mm
Diameter	8 mm	8 mm
Application	food laboratory	food laboratory

Click to buy: www.easeongear.com

pH Electrode basics

The pH electrode, due to the nature of its construction, needs to be kept moist at all times. In order to operate properly, glass needs to be hydrated. Hydration is required for the ion exchange process to occur. If an electrode should become dry, it is best to place it in some tap water for half an hour to condition the glass.


pH electrodes are like batteries; they run down with time and use. As an electrode ages, its glass changes resistance. This resistance change alters the electrode potential. For this reason, electrodes need to be calibrated on a regular basis. Calibration in pH buffer solution corrects for this change. Calibration of any pH equipment should always begin with buffer 7.0 as this is the "zero point." The pH scale has an equivalent mV scale. The mV scale ranges from +420 to -420 mV. At a pH of 7.0 the mV value is 0. Each pH change corresponds to a change of approx. ± 60 mV. As pH values become more acidic the mV values become greater. pH electrodes have junctions which allow the internal electrolyte solution of the measuring electrode to leak out into the solution being measured.

Glass Conic Tip Sensor

Glass Spheric Sensor

Epoxy Electrode

MA916B/1 (will be replaced by SE100)

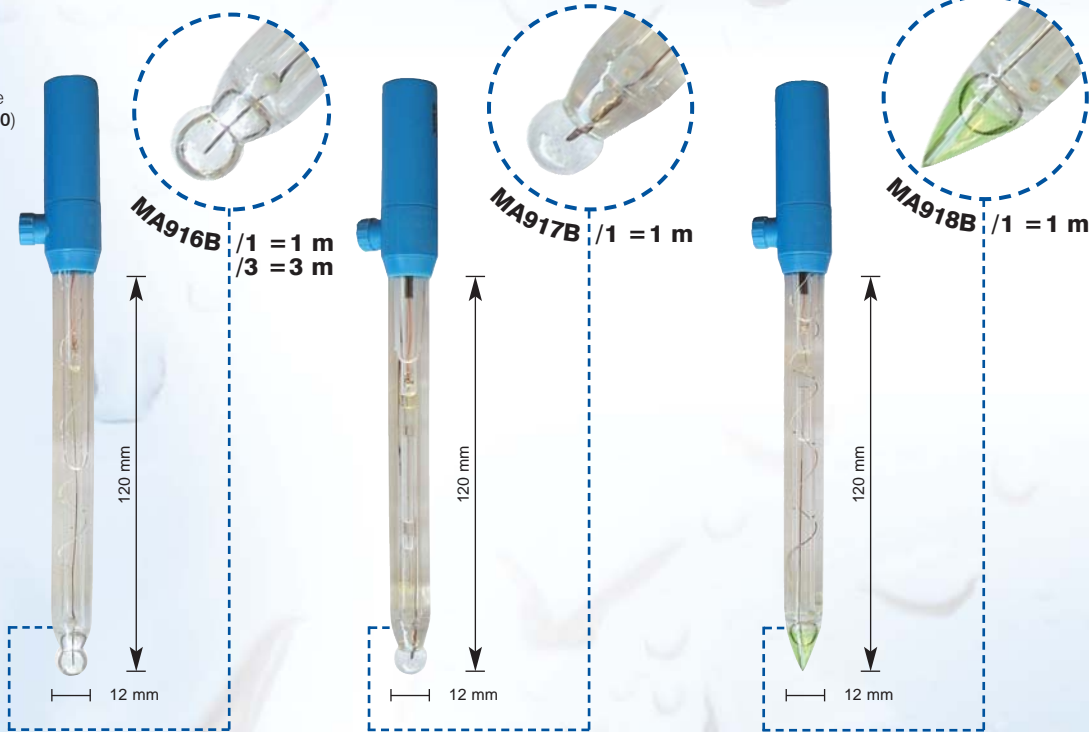


Model	MA916B/1 - MA916B/3	MA917B/1	MA918B/1
Measuring Range	0 to 13 pH	0 to 14 pH	0 to 12 pH
Temperature Range	20 to 40°C (68 to 104°F)	20 to 40°C (68 to 104°F)	-5 to 30°C (23 to 86°F)
Shaft Material	glass	glass	glass
Reference Electrolyte	KCl 3.5M + AgCl	KCl 3.5M	KCl 3.5M + AgCl
Reference Junction	ceramic, single	ceramic, single	ceramic, triple
Reference Type	single, Ag/AgCl	double, Ag/AgCl	single, Ag/AgCl
Shape of membrane	spheric	spheric	conic
Max pressure	0.1 bar	0.1 bar	0.1 bar
Connector Type	BNC	BNC	BNC
Cable length	coaxial, 1 or 3 m	coaxial, 1 m	coaxial, 1 m
Shaft length	120 mm	120 mm	120 mm
Diameter	12 mm	12 mm	12 mm
Application	laboratory applications	laboratory applications	laboratory applications

Click to buy: www.easeongear.com

pH Electrode basics

CE

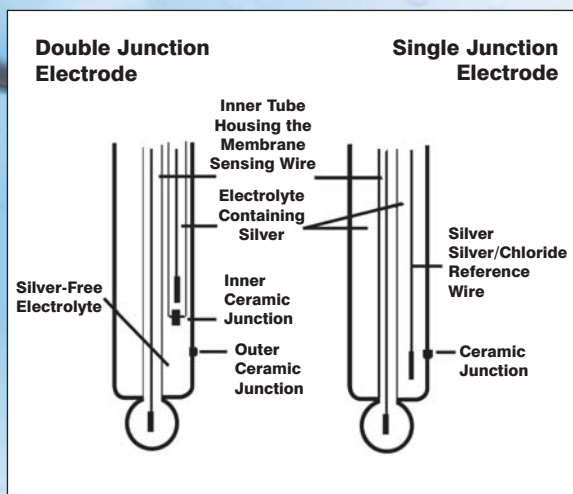

This junction can become clogged by particulates in the solution and can also facilitate poisoning by metal ions present in the solution. If a clogged junction is suspected it is best to soak the electrode in tap water to dissolve the material and clear the junction. When not in use it is best to store the electrode in either buffer 4.0 or buffer 7.0. Never store an electrode in distilled or deionized water as this will cause migration of the electrolyte solution from the electrode.

How long a pH electrode will last will depend on how it is cared for and the solutions it is used to measure. Typically, a gel-filled combination pH electrode will last six months to 1 year depending on the care and application.

How long an electrode will last is determined by how well the probe is maintained and the pH application. The harsher the system, the shorter the lifespan. For this reason it is always a good idea to have a back-up electrode on hand to avoid any system down time. Calibration is also an important part of electrode maintenance. This assures not only that the electrode is behaving properly but that the system is operating correctly.



Model	MA915B/2 - MA915B/3	MA920B/1	MA991B/1
Measuring Range	0 to 13 pH	0 to 12 pH	0 to 13 pH
Temperature Range	-5 to 40°C (23 to 104°F)	-5 to 40°C (23 to 104°F)	-5 to 40°C (23 to 104°F)
Shaft Material	glass	PVDF	glass
Reference Electrolyte	polymer	Viscolene	KCl 3.5M
Reference Junction	ground glass	open	ceramic, single
Reference Type	double, ground glass	single, Ag/AgCl	single, Ag/AgCl
Shape of membrane	spheric	conic	spheric
Max pressure	3 bar	0.1 bar	0.1 bar
Connector Type	BNC	BNC	BNC
Cable length	2 or 3 m	coaxial, 1 m	coaxial, 1 m
Shaft length	75 mm	75 mm	120 mm
Diameter	12 mm	6 mm	12 mm
Application	industrial applications	laboratory applications	laboratory applications

Click to buy: www.easeongear.com

pH Electrode basics

Temperature compensation: When measuring pH using a pH electrode the temperature error from the electrode varies based on the Nernst Equation as 0.03pH/10C/unit of pH away from pH7. The error due to temperature is a function of both temperature and the pH being measured. Temperature compensation can be achieved manually or automatically. Manual temperature compensation is usually achieved by entering the temperature of the fluid being measured into the instruments menu and then the instrument will display a "Temperature Compensated" pH reading.

This means that the temperature is corrected to the value expected at 25 Deg C. Automatic temperature compensation requires input from a temperature sensor and constantly sends a compensated pH signal to the display. Automatic temperature compensation is useful for measuring pH in systems with wide variations in temperature.

CE

DIN Connector

BNC Connector



Model	MA905B/3	MA913B/3	MA923B/3
Measuring Range	0 to 13 pH	0 to 13 pH	± 1999 mV
Temperature Range	-10 to 80°C (14 to 176°F)	20 to 40°C (68 to 104°F)	20 to 40°C (68 to 104°F)
Shaft Material		Epoxy	Epoxy
Reference Electrolyte	polymer	gel	gel
Reference Junction	double	ceramic, single	cloth
Reference Type		single, Ag/AgCl	single, Ag/AgCl
Shape of membrane		spheric	spheric pH: conic / ORP: Platinum sensor
Max pressure	6 bar	2 bar	3 bar
Connector Type	3/4" NPT - BNC	BNC	DIN
Cable length	3 m	coaxial, 3 m	7-pole, 3 m
Shaft length	120 mm	120 mm	120 mm
Diameter	22 mm	12 mm	14 mm
Application	industrial applications	water, waste water	water, waste water

Click to buy: www.eseasongear.com

Mi105 Portable pH/Temp Meter



Extended Range pH and Temperature Meter in a compact casing

The included electrode has a built-in temperature sensor and amplifier to prevent electrical interference. The large display shows readings in an extended range from -2.00 to 16.00 pH and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **Mi105** has a stability indicator and hold feature that freezes the display for easy and accurate recording. The large display also has graphic symbols to guide you through all operations. The battery life of the meters guarantees over 500 hours of continuous use. When switched ON it performs a self-check and displays the percentage of the remaining battery level to assure proper working condition. Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.



Specifications		Mi105
Range(*)	pH	-2.00 to 16.00 pH
	Temp	-5.0 to 105.0°C / 23.0 to 221.0°F
Resolution	pH	0.01 pH
	Temp	0.1 °C / 0.1 °F
Accuracy (@25°C)	pH	±0.02 pH
	Temp	±0.5°C up to 60°C; ±1°C outside / ±1°F up to 140°F; ±2°F outside
Typical EMC Deviation	pH	±0.02 pH
	Temp	±0.2°C / ±0.4°F
Temperature Compensation		automatic, from -5 to 80°C
pH Calibration		automatic, 1 or 2 points
Probe		MA914BR/1, amplified pH/temperature probe (included)
Environment		0 to 50°C / 32 to 122°F; max RH 100%
Battery Type		1 x 9V alkaline (included)
Battery Life		approx. 500 hours of use
Auto-off		after 8 minutes of non-use
Dimensions		200×85×50 mm
Weight		260 g (with battery)

(*) The temperature range is limited to 80°C (176°F) if using the MA914BR/1 probe.

Calibration, Maintenance & Cleaning Solutions

Choose from our wide selection of calibration, maintenance and cleaning solutions at page 53.



Accessories

- MA914BR/1** Combination amplified pH/Temp probe with BNC & RCA connectors and 1 m cable
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10006B** pH 6.86 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10009B** pH 9.18 buffer solution 20 mL sachet (25 pcs)



- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- MA9004** pH 4.01 buffer solution, 230 mL bottle
- MA9006** pH 6.86 buffer solution, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9009** pH 9.18 buffer solution, 230 mL bottle
- MA9010** pH 10.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL
- M10000B** Electrode rinse solution, 20 mL (25 pcs)

Ordering Information

Mi105 is supplied complete with MA914BR/1 pH/Temp amplified probe with 1 meter cable, 20 mL pH 4.01 and 7.01 sachet of calibration solution, 2x20 mL sachet of electrode cleaning solutions, 9V battery and instructions, all in a rugged carrying case.

Mi106

Portable pH/ORP/Temp Meter

Extended Range pH/ORP/Temperature Meter

The **Mi106** multi parameter portable meter is ideal for field measurements.

The included combined pH/ORP electrode has a built-in temperature sensor and amplifier to prevent electrical interference.

The large display shows readings in an extended range from -2.00 to 16.00 pH or ± 2000 mV and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **Mi106** has a stability indicator and hold feature that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.

When switched ON it performs a self-check and displays the percentage of the remaining battery level to assure proper working condition.

Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.



Years
warranty
3

ATC

Points
2

Dual
Display

Self
diagnostics

CE

Specifications	Mi106
Range (*)	pH -2.00 to 16.00 pH mV -2000 to +2000 mV Temp -5.0 to 105.0°C / 23.0 to 221.0°F
Resolution	pH 0.01 pH mV 1 mV Temp 0.1°C / 0.1°F
Accuracy (@25°C)	pH ± 0.02 pH mV ± 2 mV Temp $\pm 0.5^\circ\text{C}$ up to 60°C ; $\pm 1^\circ\text{C}$ outside / $\pm 1^\circ\text{F}$ up to 140°F ; $\pm 2^\circ\text{F}$ outside
Typical EMC Deviation	pH ± 0.02 pH mV ± 2 mV Temp $\pm 0.2^\circ\text{C}$ / $\pm 0.4^\circ\text{F}$
Temperature Compensation	automatic, from -5 to 80°C / 23 to 176°F
pH Calibration	automatic, 1 or 2-point
ORP Calibration	factory calibrated
Probe	MA923D/1, amplified pH/ORP/temperature probe (included)
Environment	0 to 50°C / 32 to 122°F ; max RH 95%
Battery Type	1 x 9V alkaline (included)
Battery Life	approx. 500 hours of use
Auto-off	after 8 minutes of non-use
Dimensions	200 x 85 x 50 mm
Weight	260 g (with battery)

(*) The temperature range is limited to 80°C (176°F) if using the MA923D/1 probe.

Hard Carrying Case

Each meter is supplied in a hard carrying case ideal for field measurements.



Accessories

- MA923D/1** Combination amplified pH/ORP/Temp probe with DIN connector and 1 m cable
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10006B** pH 6.86 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)

- M10009B** pH 9.18 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)
- MA9004** pH 4.01 buffer solution, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL
- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)



Ordering Information

Mi106 is supplied complete with MA923D/1 pH/ORP/Temp amplified probe with 1 meter cable, 20 mL pH 4.01 and 7.01 sachet of calibration solution, 2x20 mL sachet of electrode cleaning solutions, 9V battery, instructions, all in a rugged carrying case.

Click to buy: www.easeongear.com

MW100/MW101/MW102/MW500

Entry level, inexpensive pH/ORP/Temperature Portable Meters for fast and reliable results



MW100, MW101, MW102 and MW500 are compact pH, ORP and Temperature Portable Meters with Faster Micro Processor. These handy and ergonomically designed portable meters are ideal for anyone working on a low budget and still requires fast and reliable measurements.





These portable meters are suitable for a wide range of applications, such as Educational, Agriculture and Horticulture, as well as water and environmental analysis.

These easier and faster to calibrate portable meters have a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.

All meters are supplied with pH or ORP electrodes and calibration solutions.

- **MW100** performs pH measurements with a 0.1 pH resolution and with manual temperature compensation.
- **MW101** performs pH measurements with a 0.01 pH resolution and with manual temperature compensation.
- **MW102** is a microprocessor based pH/Temperature meter with extended range (-2.00 to 16.00 pH), Automatic Temperature Compensation, automatic calibration in 2 points and ± 0.02 pH accuracy.
- **MW500** performs ORP measurements with a range of ± 1000 mV.

Specifications

		 MW100 pH Meter	 MW101 pH Meter	 MW102 pH/Temp Meter	 MW500 ORP Meter
Range	pH/ORP Temp	0.0 to 14.0 pH	0.00 to 14.00 pH	-2.00 to 16.00 pH -5 to 70°C	± 1000 mV
Resolution	pH/ORP Temp	0.1 pH	0.01 pH	0.01 pH 0.1°C	1 mV
Accuracy (@25°C)	pH/ORP Temp	± 0.2 pH	± 0.02 pH	± 0.02 pH $\pm 0.5^\circ\text{C}$	± 5 mV
Typical EMC Deviation	pH Temp			± 0.02 pH $\pm 0.5^\circ\text{C}$	
Temperature Compensation		N.A.	manual, 0 to 50°C	automatic, 0 to 70°C	
Calibration		manual, 2-point through offset and slope trimmers	manual, 2-point through offset and slope trimmers	automatic, at 1 or 2 points	
pH Electrode		SE220 (included)	SE220 (included)	SE220 (included)	
ORP Electrode					SE300 (included)
Temperature Probe				MA830R (included)	
Environment		0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C; max RH 95%	0 to 50°C; max RH 95%
Battery Type		1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)
Battery Life		approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use
Auto-off				after 8 minutes of non-use	
Dimensions		145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm
Weight		220 g (with battery)	220 g (with battery)	220 g (with battery)	220 g (with battery)

Accessories

- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
M10007B pH 7.01 buffer solution 20 mL sachet (25 pcs)
M10010B pH 10.01 buffer solution 20 mL sachet (25 pcs)
MA9004 pH 4.01 buffer solution, 230 mL bottle
MA9007 pH 7.01 buffer solution, 230 mL bottle

- MA9015** Electrode storage solution, 230 mL
MA9016 Electrode cleaning solution, 230 mL
MA830R Temperature probe
MA9020 200-275 mV ORP solution, 230 mL bottle
SE220 pH electrode with BNC connector and 1 m cable
SE300 Platinum ORP electrode with 1 m cable



Ordering Information

MW100 and **MW101** are supplied complete with a SE220 pH electrode, pH 7.01 20 mL sachet of calibration solution, calibration screwdriver, 9V battery and instructions.

MW102 is supplied complete with a SE220 pH electrode, MA830R stainless steel temperature probe, pH 4.01 and pH 7.01 20 mL sachet of calibration solution, 9V battery and instructions.

MW500 is supplied complete with a SE300 platinum electrode, 9V battery and instructions.

Click to buy: www.easeongear.com

Measuring pH in Meat

The pH changes occurring in a carcass during the first 24 h after slaughter are important for the quality of the final meat or meat products. Protein denaturation will occur if pH falls to too low a level or if a relatively low pH sets in at a time after slaughter where the carcass temperature is still high. This will result in meat with poor water holding capacity and in extreme cases in meat that is PSE. pH is measured electrochemically using either glass or solid state (IS-FET) electrodes. However, electrochemically based methods are slow to use and do not offer good precision on unhomogenized meat.



1. Calibrate the pH meter using pH 7 and pH 4 standardization buffers.



2. Cut meat sample into small pieces and weight approximately 10 grams into a blender cup. Run duplicates on each sample.




3. Add 100 ml of distilled deionized water

4. Blend for 30 seconds on high speed.



5. Transfer sample to a beaker. Read the pH as soon as possible.

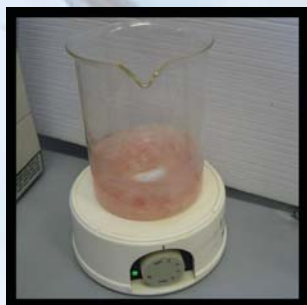

6. Add a stir bar to the beaker, turn on the stir plate and place the pH electrode in the sample. Wait for the ready light to come on before recording the pH value.



7. Blender cups, beakers and stir bars can be rinsed in distilled water between samples. The pH electrode should be rinsed with distilled water between each sample and periodically rinsed with acetone from a squeeze bottle to remove fat buildup.

Click to buy: www.easeongear.com

pH55/pH56 Pocket-size pH/Temperature Meters with replaceable electrode

Waterproof pH testers with Large dual-level LCD that displays pH and temperature (°C or °F).

The large display shows readings in an extended range from -2.0 to 16.0 pH (**pH56** has a 0.01 pH resolution) and simultaneously shows temperature from -5.0 to 105.0°C or 23.0 to 221.0°F.

They have a stability indicator and hold function that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.



Complete with a temperature probe for faster and more precise temperature measurement they compensate automatically for temperature.

Calibration is made automatically in 1 or 2 points with memorized standard and NIST buffer sets. Auto power OFF saves battery power after non-use.

The double-junction electrode can be replaced in a very fast and simple way! The modular design allows easy electrode and battery replacement.



Specifications

			
		pH55	pH56
Range	pH Temp	-2.0 to 16.0 pH -5.0 to 60.0°C / 23.0 to 140.0°F	-2.00 to 16.00 pH -5.0 to 60.0°C / 23.0 to 140.0°F
Resolution	pH Temp	0.1 pH 0.1°C / 0.1°F	0.01 pH 0.1°C / 0.1°F
Accuracy (@25°C)	pH Temp	±0.1 pH ±0.5°C / ±1°F	±0.05 pH ±0.5°C / ±1°F
Typical EMC Deviation	pH Temp	±0.1 pH ±0.3°C / ±0.6°F	±0.02 pH ±0.3°C / ±0.6°F
Calibration		automatic, 1 or 2 points with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.01, 6.86, 9.18)	automatic, 1 or 2 points with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.01, 6.86, 9.18)
Temperature Compensation		automatic, from -5 to 60°C	automatic, from -5 to 60°C
Probe		Mi56P (replaceable)	Mi56P (replaceable)
Environment		-5 to 50°C / 32 to 122°F; max RH 100%	-5 to 50°C / 32 to 122°F; max RH 100%
Battery Type		4 x 1.5V; IEC LR44, A76 (included)	4 x 1.5V; IEC LR44, A76 (included)
Battery Life		approx. 300 hours of use	approx. 300 hours of use
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		200 x dia 38 mm	200 x dia 38 mm
Weight		100 g	100 g

Accessories

- Mi56P** Replaceable electrode for pH55 & pH56
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)

- MA9004** pH 4.01 buffer, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9009** pH 9.18 buffer solution, 230 mL bottle
- MA9010** pH 10.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL
- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)



Temperature Sensor

The **pH55** and **pH56**'s exposed temperature sensor provides fast response time, and its proximity to the pH electrode guarantees much more accurate temperature compensated readings.



Replaceable electrode

Replace the electrode in a fast and simple way yourself! Just unscrew the plastic ring on the top of the electrode and replace the electrode with a new one.



Ordering Information

pH55 is supplied complete with protective cap, 20 mL, pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

pH56 is supplied complete with protective cap, 20 mL, pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

Click to buy: www.easeongear.com

ORP57/pH58

Pocket-size pH/ORP/Temperature Meters with replaceable electrode

Combination waterproof testers with advanced functions also include the new model **pH58** for simultaneous pH and ORP measurements and temperature, which is continuously displayed on the dual level LCD.

It shows readings in an extended range from -2.00 to 16.00 pH or ± 1000 mV and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **pH58** has a stability indicator and hold feature that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.

Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.

The modular design allows easy electrode and battery replacement.



Years warranty
2

ATC

IP65

Points
2

AUTO Buffer

Dual Display

Self diagnostics

CE

Electrode Replaceable

Specifications

		ORP57	pH58
Range	pH ORP Temp	± 1000 mV -5.0 to 60.0°C / 23.0 to 140.0°F	-2.00 to 16.00 pH ± 1000 mV -5.0 to 60.0°C / 23.0 to 140.0°F
Resolution	pH ORP Temp	1 mV 0.1°C / 0.1°F	0.01 pH 1 mV 0.1°C / 0.1°F
Accuracy (@25°C)	pH ORP Temp	± 2 mV $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	± 0.05 pH ± 2 mV $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$
Typical EMC Deviation	pH ORP Temp	± 2 mV $\pm 0.3^\circ\text{C}$ / $\pm 0.6^\circ\text{F}$	± 0.02 pH ± 2 mV $\pm 0.3^\circ\text{C}$ / $\pm 0.6^\circ\text{F}$
pH Calibration			automatic for pH, 1 or 2 points, from -5 to 60°C with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.01, 6.86, 9.18)
ORP Calibration		factory calibrated	factory calibrated
Probe		Mi57P (replaceable)	Mi58P (replaceable)
Environment		0 to 50°C; max RH 100%	-5 to 50°C; max. RH 100%
Battery Type		4 x 1.5V; IEC LR44, A76	4 x 1.5V; IEC LR44, A76
Battery Life		approx. 300 hours of use	approx. 250 hours of use
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		200 x dia 38 mm	200 x dia 38 mm
Weight		100 g	100 g

Replaceable combination pH/ORP electrode for pH58

Replace the electrode in a fast and simple way yourself! Just unscrew the plastic ring on the top of the electrode and replace the electrode with a new one.



Calibrations, Maintenance & Cleaning Solutions

Choose from our wide selection of calibration, maintenance and cleaning solutions at page 53.



Accessories

Mi57P	Replaceable electrode for ORP57
Mi58P	Replaceable electrode for pH58
M10004B	pH 4.01 buffer solution 20 mL sachet (25 pcs)
M10007B	pH 7.01 buffer solution 20 mL sachet (25 pcs)
M10010B	pH 10.01 buffer solution 20 mL sachet (25 pcs)
MA9004	pH 4.01 buffer solution, 230 mL bottle

MA9006	pH 6.86 buffer solution, 230 mL bottle
MA9007	pH 7.01 buffer solution, 230 mL bottle
MA9009	pH 9.18 buffer solution, 230 mL bottle
MA9010	pH 10.01 buffer solution, 230 mL bottle
MA9015	Electrode storage solution, 230 mL
MA9016	Electrode cleaning solution, 230 mL
MA9020	ORP test solution (200/275 mV), 230 mL bottle
M10000B	Electrode rinse solution, 20 mL sachet (25 pcs)

Ordering Information

ORP57 is supplied complete with protective cap, carton box, batteries and instructions.

pH58 is supplied complete with protective cap, 20 mL pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

Click to buy: www.easeongear.com

MC110/MC120 pH Monitors

New



The Smart pH monitor allows you to continuously monitor pH values directly in your reservoir. Features include: user selectable set point, visual LED alarm when values go above the set point and manual calibration.

Each monitor is powered by a 12 VDC adapter and is ideal for applications such as Hydroponic and Aquarium.

The pH monitors are very simple to operate:

1. hang your monitor above the reservoir;
2. connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area away from the water);
3. immerse 2/3 of the electrode in the solution;
4. the probe can now remain there permanently.

The monitors are supplied complete with a MA911B/2 pH electrode. Each monitor comes complete with a 12 VDC adapter and calibration solution.

Set point:

A visual LED alarms when value goes above or below the set point the user selected.



Specifications

		MC110	MC120
Range	pH	0.0 to 14.0 pH	0.0 to 14.0 pH
Resolution	pH	0.1 pH	0.1 pH
Accuracy (@25°C)	pH	±0.2 pH	±0.2 pH
Calibration		manual, 2 point, through trimmers on the meter front panel	manual, 2 point, through trimmers on the meter front panel
Set point		3.5 to 7.5 pH	5.5 to 9.5 pH
Alarm		active when measure is higher or lower than selected set point	active when measure is higher or lower than selected set point
pH Electrode		MA911B/2 (included)	MA911B/2 (included)
Environment		0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Power Supply		12 VDC power adapter (included)	12 VDC power adapter (included)
Dimensions		148,5 x 82,5 x 32 mm	148,5 x 82,5 x 32 mm
Weight		160 g (meter only)	160 g (meter only)

Accessories

- M10004B** pH 4.01 buffer solution, 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution, 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- M100058B** Cal-test solution for MC115, 20 mL sachet (25 pcs)
- M10016B** Electrode cleaning solution, 20 mL sachet (25 pcs)



- MA9015** Electrode storage solution, 20 mL sachet (25 pcs)
- MA9016** Electrode cleaning solution, 20 mL sachet (25 pcs)
- MA911B/2** Double junction, gel filled pH electrode with 2 m cable

Ordering Information

MC110 is supplied complete with a 12VDC adapter, MA911B/2 pH electrode, 20 mL pH 7.01 sachet of calibration solution, calibration screwdriver and instructions.

MC120 is supplied complete with a 12VDC adapter, MA911B/2 pH electrode, 20 mL pH 7.01 sachet of calibration solution, calibration screwdriver and instructions.

MC122/MC510/MC125

pH & ORP Controllers

With Milwaukee's MC Controllers you can monitor and control pH and/or ORP levels.

The Milwaukee Instruments MC Controllers have a user selectable set point and a visual "Power Activated" LED notification light. Power to the controller box is turned on when the reading is Above or Below the selected set point. These MC Controllers are ideal for CO₂ or ozone dosing. This could be controlled by a solenoid valve (MA955).

With each Milwaukee Smart controller, your aquarium will have the individual attention that it needs.

Each unit comes with 12 VDC adapter, mounting kit, probe, probe holder and starter calibration solution for pH. (factory calibrated for ORP)
Professional pH controller especially designed for use with aquariums.



MA955 Solenoid valve for CO₂ dosing



Key features include:

- User selectable Hi/Low Set Point
- Manual 2 points calibration
- Visual LED alarm
- Supplied with 12 VDC adapter and mounting kit
- Power plug for CO₂ dosing
- Double junction pH electrode and/or platinum ORP electrode (BNC connector)

Specifications

	MC122	MC510	MC125
Range	0.0 to 14.0 pH	±1000 mV (ORP)	0.00 to 14.00 pH; ±1000 mV (ORP)
Resolution	0.1 pH	1 mV (ORP)	0.01 pH; 1 mV (ORP)
Accuracy (@25°C)	±0.2 pH	±5 mV (ORP)	±0.2 pH; ±5 mV (ORP)
Set point pH	5.5 to 9.5 pH		4 to 8 pH
Set point ORP		0 to 600 mV	-200 to 600 mV
Alarm	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set point	active when measurement is higher than the set points
Output Power Socket	active when measurement is higher or lower than selected set point (5A max)	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set point
pH Electrode	MA911B/2 (included)	MA921B/2 (included)	MA911B/2 (included)
ORP Electrode		MA921B/2 (included)	MA921B/2 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Power Supply	12 VDC power adapter (included)	12 VDC power adapter (included)	12 VDC power adapter (included)
Power Drivers	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz
Dimensions	148,5 x 82,5 x 32 mm	148,5 x 82,5 x 32 mm	148,5 x 82,5 x 32 mm
Weight	180 g (meter only)	180 g (meter only)	180 g (meter only)

Accessories

- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)
- M10000B** Electrode rinse solution 20 mL sachet (25 pcs)
- MA9015** Electrode storage solution 20 mL sachet (25 pcs)



- MA955** Solenoid valve with 1.5 m cable
- MA911B/2** Double junction, gel filled pH electrode with 1 m cable
- MA921B/2** ORP Electrode with BNC connector and 2 m cable

Ordering Information

MC122 is supplied complete with 12 VDC adapter, MA911B/2 pH electrode, 20 mL pH4.01 sachet of calibration solution, 20 mL pH7.01 sachet of calibration solution-calibration screwdriver and instructions.

MC510 is supplied complete with 12 VDC adapter, MA921B/2 ORP electrode and instructions.

MC125 is supplied complete with 12 VDC adapter, power plug socket for ozone dosing, MA911B/2 pH electrode, MA921B/2 ORP electrode, 20 mL pH7.01 sachet of calibration solution, calibration screwdriver and instructions.

Click to buy: www.easeongear.com

Mi170

Autoranging EC/TDS/NaCl/Temperature Laboratory Bench Meter

Years
warranty
3

LOG

RS232

USB

ATC

MTC

Software
CDDual
DisplaySelf
diagnostics

GLP

CE



Mi170 measures 4 different parameters - EC, TDS (Total Dissolved Solids), percentage of NaCl and temperature in a variety of ranges.

The auto-ranging feature for EC and TDS measurements automatically sets the resolution suitable to the tested sample. All measurements can be temperature compensated at 20 or 25°C and the compensation coefficient is selectable by the user.

The automatic temperature compensation can also be disabled for measuring the actual conductivity value. The stability indicator on the LCD ensures accuracy.

Conductivity readings are performed with the 4-ring probe supplied with the meter. The GLP feature allows users to store and recall data on system status.

PC compatible through an RS232 or USB port.

Specifications	Mi170
Range	EC 0.00 to 29.99 $\mu\text{S}/\text{cm}$; 30.0 to 299.9 $\mu\text{S}/\text{cm}$; 300 to 2999 $\mu\text{S}/\text{cm}$; 3.00 to 29.99 mS/cm ; 30.0 to 200.0 mS/cm ; up to 500.0 mS/cm actual conductivity (uncompensated EC)* TDS 0.00 to 14.99 mg/L (ppm); 15.0 to 149.9 mg/L (ppm); 150 to 1499 mg/L (ppm); 1.5 to 14.99 g/L (ppt); 15.0 to 100.0 g/L (ppt); up to 400.0 g/L actual TDS* (with 0.80 factor) NaCl 0.0 to 400.0% Temp -20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	EC 0.01 $\mu\text{S}/\text{cm}$; 0.1 $\mu\text{S}/\text{cm}$; 1.0 $\mu\text{S}/\text{cm}$; 0.01 mS/cm ; 0.1 mS/cm TDS 0.01 mg/L ; 0.1 mg/L ; 1.0 mg/L ; 0.01 g/L ; 0.1 g/L NaCl 0.1% Temp 0.1°C / 0.1°F
Accuracy	EC $\pm 1\%$ of reading $\pm (0.05 \mu\text{S}/\text{cm}$ or 1 digit) TDS $\pm 1\%$ of reading $\pm (0.03 \text{ mg}/\text{L}$ or 1 digit) NaCl $\pm 1\%$ of reading Temp $\pm 0.4^\circ\text{C}$ / $\pm 0.8^\circ\text{F}$
Calibration	EC 1 point slope calibration with 6 memorized solutions (84.0 $\mu\text{S}/\text{cm}$, 1413 $\mu\text{S}/\text{cm}$, 5.00 mS/cm , 12.88 mS/cm , 80.0 mS/cm , 111.8 mS/cm) NaCl 1 point, with MA9066 calibration solution Temp 2 points, 0 to 50°C / 32 to 12 °F
Temp. Compensation	automatic or manual, from -20.0 to 120.0°C / -4.0 to 248.0°F
Temp. Coefficient	selectable from 0.00 to 6.00%/°C (EC and TDS only)
Probe	MA814DB/1 4-ring probe with built-in temperature sensor (included)
TDS Factor	0.40 to 0.80 (default value is 0.50)
Logging	up to 50 records, LOG on demand or auto-logging
GLP	last EC, NaCl calibration data
PC Interface	RS232 / USB Opto-isolated
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Power supply	12 VDC power adapter (included)
Dimensions	230 x 160 x 95 mm
Weight	0.9 kg

(*) Uncompensated conductivity (or TDS) is the conductivity (or TDS) value without temperature compensation.

More accurate readings with the 4-RING MA814DB/1 EC/TDS/NaCl and Temperature probe!

Conductivity readings are performed by applying an alternate current to the 4-ring probe which creates a variable voltage depending on the conductivity.



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Accessories

- MA814DB/1 EC/Temperature probe with DIN connector and 1 m cable
- MA9060 12880 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
- MA9061 1413 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
- MA9063 84 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
- MA9064 80000 $\mu\text{S}/\text{cm}$ conductivity solution, 230 mL bottle



- MA9065 111.8 mS/cm calibration solution, 230 mL bottle
- MA9066 100% NaCl calibration solution, 230 mL bottle
- MA9069 5000 $\mu\text{S}/\text{cm}$ solution, 230 mL bottle
- MA9310 12 VDC Adapter, 220 V
- MA9311 12 VDC Adapter, 110 V
- MA9315 Electrode holder
- MA9350 RS232 connection cable with 2 meters cable
- Mi5200 Application Software

Ordering Information

- Mi170 is supplied complete with
- MA814DB/1 EC/TDS/NaCl/Temperature Probe
 - MA9315 Electrode Holder
 - M10030 12880 $\mu\text{S}/\text{cm}$ calibration solution
 - M10031 1413 $\mu\text{S}/\text{cm}$ calibration solution
 - Mi5200 Application Software
 - MA9350 RS232 connection cable with 2 meters cable
 - 12 VDC Adapter
 - Instruction manual

Click to buy: www.eseasongear.com

Mi306

Automatic & Logging EC/TDS/NaCl Temp Meter

Mi306 is a waterproof portable logging microprocessor-based Conductivity/TDS/NaCl/temperature meter. The autoranging feature of the EC and TDS ranges automatically sets the meter to the scale with the highest possible resolution.

The Auto Endpoint (HOLD) feature automatically freezes the display when a stable reading is reached. The measurements are automatically (ATC) or manually (MTC) compensated for temperature.

The temperature coefficient value is user selectable. It is possible to disable the temperature compensation and measure the actual conductivity (NoTC).

The Battery Error Preventing System (BEPS) switches the meter off when the batteries are too weak to support proper function. The meter can store measurements in memory by logging function for retrieval at a later time upon user request.

Mi306 also allows data transfer to computer through the RS232 port. Double LCD displays, for simultaneous readings of the specific conductivity and temperature.

Years
warranty
2

LOG

RS232

ATC

MTC

Software
CDSelf
diagnostics

CE

Specifications	Mi306
Range (Autoranging) EC	0.00 to 29.99 $\mu\text{S/cm}$; 30.0 to 299.9 $\mu\text{S/cm}$; 300 to 2999 $\mu\text{S/cm}$;
(Autoranging) TDS	3.00 to 29.99 mS/cm ; 30.0 to 200.0 mS/cm ; up to 500.0 mS/cm actual(*) EC
NaCl Temp	0.00 to 14.99 mg/L ; 15.0 to 149.9 mg/L ; 150 to 1499 mg/L ; 1.50 to 14.99 g/L ;
	15.0 to 100.0 g/L ; up to 400.0 g/L actual(*) TDS (with 0.80 factor)
Resolution EC	0.01 $\mu\text{S/cm}$ (from 0.00 to 29.99 $\mu\text{S/cm}$); 0.1 $\mu\text{S/cm}$ (from 30.0 to 299.9 $\mu\text{S/cm}$);
TDS	1 $\mu\text{S/cm}$ (from 300 to 2999 $\mu\text{S/cm}$); 0.01 mS/cm (from 3.00 to 29.99 mS/cm);
NaCl Temp	0.1 mS/cm (over 30.0 mS/cm)
Accuracy EC	0.01 mg/L (from 0.00 to 14.99 mg/L); 0.1 mg/L (from 15.0 to 149.9 mg/L);
TDS	1 mg/L (from 150 to 1499 mg/L); 0.01 g/L (from 1.50 to 14.99 g/L);
NaCl Temp	0.1 g/L (over 15.0 g/L)
Typical EMC Deviation EC	0.1 %
TDS	0.1°C
NaCl Temp	±1% of reading (±0.05 $\mu\text{S/cm}$ or 1 digit whichever greater)
Logging	±1% of reading (±0.053 ppm or 1 digit whichever greater)
Communication	±1% of reading
EC Calibration	±0.4°C
NaCl Calibration	±1% of reading
Temperature Compensation	±1% of reading
Temperature Coefficient	±1% of reading
TDS Factor	±0.1°C
Probe	up to 250 records, LOG on demand
Auto-off	with PC through RS232 port
Battery Type / Battery Life	1 point with 7 memorized buffers: 84 $\mu\text{S/cm}$, 1413 $\mu\text{S/cm}$, 5000 $\mu\text{S/cm}$, 80000 $\mu\text{S/cm}$, 111800 $\mu\text{S/cm}$
Casing	1 point with MA9066 buffer (optional)
Environment	automatic or manual from 0 to 60°C
Dimensions	(can be disabled to measure actual conductivity and TDS)
Weight	0.00 to 6.00 °/°C (for EC and TDS only)
	Default value is 1.90%/°C
	0.40 to 0.80 (default value is 0.50)
	reference Temperature: 20 or 25°C
	MA814D/1 EC probe with built-in temperature sensor & 1 m cable (included)
	after 5 minutes of non use (can be disabled)
	1 x 9V Battery (included) / approx. 100 hours of use
	IP 67
	0 to 50°C / 32 to 122°F; max RH 100%
	200 x 85 x 50 mm
	280 g

(*) Uncompensated conductivity (or TDS) is the conductivity (or TDS) value without temperature compensation.

Accessories



- MA814D/1** 4-ring EC probe with DIN connector and 1 m cable
- M10030B** 12880 $\mu\text{S/cm}$ calibration solution, 20 mL sachet, 25 pcs.
- M10031B** 1413 $\mu\text{S/cm}$ calibration solution, 20 mL sachet, 25 pcs.
- M10035B** 111.8 mS/cm calibration solution, 20 mL sachet, 25 pcs.
- MA9060** 12880 $\mu\text{S/cm}$ calibration solution, 230 mL bottle
- MA9061** 1413 $\mu\text{S/cm}$ calibration solution, 230 mL bottle
- MA9063** 84 $\mu\text{S/cm}$ calibration solution, 230 mL bottle
- MA9065** 111.8 mS/cm calibration solution, 230 mL bottle
- MA9066** 100% NaCl calibration solution, 230 mL bottle
- MA9069** 5000 $\mu\text{S/cm}$ solution, 230 mL bottle
- MA9351** RS232 connection cable (5 to 9 pin) with 2 meters cable (for Mi306)
- Mi5200** Application Software

Ordering Information

Mi306 is supplied in a hard carrying case complete with

- **MA814D/1** EC/TDS/NaCl/Temp probe with DIN connector and 1 meter cable
- **MA9060** 12880 $\mu\text{S/cm}$ calibration solution
- **Mi5200** Application Software
- **MA9351** RS232 connection cable with 2 meters cable
- Instruction manual

Click to buy: www.easeongear.com

MW301/MW302/MW401/MW402

Entry level, inexpensive Conductivity & TDS Portable Meters for fast and reliable results

MW301, MW302, MW401 and MW402 are compact Conductivity and TDS Portable Meters with Faster Micro Processor. These handy and ergonomically designed portable meters are ideal for anyone working on a low budget and still requires fast and reliable measurements. These portable meters are suitable for a wide range of applications, such as Educational, Agriculture and Horticulture, as well as water and environmental analysis.

These portable meters with Automatic Temperature Compensation have a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.





Each meter is supplied complete with Conductivity/TDS probe with 1 meter cable and calibration solution.

Choose your portable EC & TDS meter according to the proper EC/TDS ranges for your application:

- **MW301:** 0 to 1990 μ S/cm with a 10 μ S/cm resolution;
- **MW302:** 0.0 to 10.0 mS/cm with a 0.1 mS/cm resolution;
- **MW401:** 0 to 1990 mg/L (ppm) with a 10 mg/L resolution;
- **MW402:** 0.0 to 10.0 g/L (ppt) with a 0.1 g/L resolution.



Specifications

	 MW301	 MW302	 MW401	 MW402
Range	0 to 1990 μ S/cm	0.0 to 10.0 mS/cm	0 to 1990 mg/L (ppm)	0.0 to 10.0 g/L (ppt)
Resolution	1 μ S/cm	0.1 mS/cm	1 mg/L (ppm)	0.1 g/L (ppt)
Accuracy (@25°C)	\pm 2% Full Scale	\pm 2% Full Scale	\pm 2% Full Scale	\pm 2% Full Scale
Conversion Factor			0.5	0.5
Calibration Solutions (included)	1413 μ S/cm (M10031B)	1413 μ S/cm (M10031B)	1382 mg/L (M10032B)	6.44 g/L (M10038B)
Conductivity Probe	SE510 (included)	SE520 (included)	SE510 (included)	SE520 (included)
Temperature Compensation	automatic, from 5 to 50°C	automatic, from 5 to 50°C	automatic, from 5 to 50°C	automatic, from 5 to 50°C
Environment	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%
Battery Type	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)
Battery Life	approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use
Dimensions	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm
Weight	220 g (with battery)	220 g (with battery)	220 g (with battery)	220 g (with battery)

Accessories

- SE510** EC/TDS probe with DIN connector and 1 m cable for MW301, MW401
- SE520** EC/TDS probe with DIN connector and 1 m cable for MW302, MW402
- M10031B** 1413 μ S/cm calibration solution, 20 mL (25 pcs)
- M10032B** 1382 ppm (mg/L) calibration solution, 20 mL (25 pcs)

- M10038B** 6.44 ppt (g/l) calibration solution, 20 mL (25 pcs)
- MA9060** 12880 μ S/cm calibration solution, 230 mL bottle
- MA9061** 1413 μ S/cm calibration solution, 230 mL bottle
- MA9062** 1382 ppm TDS solution, 230 mL bottle



Ordering Information

MW301 is supplied complete with SE510 EC probe, 20 mL 1413 μ S/cm sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW302 is supplied complete with SE520 EC probe, 20 mL 1413 μ S/cm sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW401 is supplied complete with SE510 EC probe, 20 mL 1382 ppm sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW402 is supplied complete with SE520 EC probe, 20 mL 6.44 ppt sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

EC59/EC60

Pocket-size EC/TDS/Temp Meters

These new waterproof Pocket-size EC/TDS/Temp Meters include features such as a replaceable probe, temperature in °C or °F, automatic temperature compensation with adjustable β , battery level indicator, stability indicator, automatic shut-off and automatic calibration all in a floating, waterproof casing.

EC59 shows on the dual-level LCD the EC (3999 $\mu\text{S}/\text{cm}$) or TDS (2000 ppm) value. It also displays the temperature from 0.0 to 60.0°C (or 32.0 to 140.0°F) on the secondary level at the same time.

EC60 shows on the dual-level LCD the EC (20.00 mS/cm) or TDS (10.00 ppt) value. It also displays the temperature from 0.0 to 60.0°C (or 32.0 to 140.0°F) on the secondary level at the same time.



Specifications

		EC59	EC60
Range	EC	3999 $\mu\text{S}/\text{cm}$	20.00 mS/cm
	TDS	2000 ppm	10.00 ppt
	Temp	0.0 to 60.0°C / 32.0 to 140.0°F	0.0 to 60.0°C / 32.0 to 140.0°F
Resolution	EC	1 $\mu\text{S}/\text{cm}$	0.01 mS/cm
	TDS	1 ppm	0.01 ppt
	Temp	0.1°C / 0.1°F	0.1°C / 0.1°F
Accuracy (@20°C)	EC	2% Full Scale	2% Full Scale
	TDS	2% Full Scale	2% Full Scale
	Temp	$\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	$\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$
Typical EMC Deviation	EC	2% Full Scale	2% Full Scale
	TDS	2% Full Scale	2% Full Scale
	Temp	$\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	$\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$
Calibration		automatic, 1 point	automatic, 1 point
Temperature Compensation		automatic, with $\beta=0.0$ to 2.4%/°C	automatic, with $\beta=0.0$ to 2.4%/°C
Probe		Mi59P (replaceable)	Mi59P (replaceable)
Environment		0 to 50°C / 32 to 122°F; max RH 100%	0 to 50°C / 32 to 122°F; max RH 100%
Battery Type		4 x 1.5V; IEC LR44, A76 (included)	4 x 1.5V; IEC LR44, A76 (included)
Battery Life		approx. 100 hours of use	approx. 100 hours of use
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		200 x dia 38 mm	200 x dia 38 mm
Weight		100 g	100 g


Easy to read Display

Dual level LCD displays EC/TDS and temperature.



Replaceable EC/TDS/Temp probe

Exposed temperature sensor.



Replaceable EC/TDS probe.

Accessories

- Mi59P** Replaceable probe for EC59 & EC60
- M10030B** 12880 $\mu\text{S}/\text{cm}$ calibration solution, 20 mL sachet, 25 pcs
- M10031B** 1413 $\mu\text{S}/\text{cm}$ calibration solution, 20 mL sachet, 25 pcs
- M10032B** 1382 ppm (mg/L) calibration solution, 20 mL sachet, (25 pcs)
- M10038B** 6.44 ppt (g/L) calibration solution, 20 mL sachet, (25 pcs)



- MA9060** 12880 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
- MA9061** 1413 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
- MA9016** Cleaning solution, 230 mL bottle
- M10000B** Rinse solution, 20 mL sachet, 25 pcs

Ordering Information

EC59 is supplied complete with protective cap, 20 mL 1413 $\mu\text{S}/\text{cm}$ sachet of calibration solution, carton box, batteries and instructions.

EC60 is supplied complete with protective cap, 20 mL 12880 $\mu\text{S}/\text{cm}$ sachet of calibration solution, carton box, batteries and instructions.

Click to buy: www.easeongear.com

MC310

Conductivity Monitor

New



Reliable Conductivity monitors with Automatic temperature compensation and 1 point manual calibration powered by a 12 VDC adapter.

They are ideal for the hydroponic market and allow you to continuously monitor EC values directly in your reservoir.

Other features include: user selectable set point, visual LED alarm when values go above/below (selectable by the user) the set point.

The monitors are very simple to operate:

1. hang your monitor above your reservoir
2. connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area from the water!)
3. immerse 2/3 of the probe in the solution
4. the probe can now remain there permanently.

Specifications



MC310

Range	EC	0.0 to 10.0 mS/cm
Resolution	EC	0.1 mS/cm
Accuracy (@25°)		±2% Full Scale
Set point		1 to 5 mS/cm
Alarm		active when the measurement is higher/lower than the set point
Temperature Compensation		automatic, from 5 to 50°C
Environment		0 to 50°C; max RH 95%
Probe		MA812/2 (included)
Power Supply		12 VDC power adapter (included)
Dimensions		148,5 x 82,5 x 32 mm
Weight		180 g (meter only)

Set point:

A visual LED alarms when value goes above or below the set point the user selected.



Accessories

- M10031B 1413 μ S/cm calibration solution, 20 mL sachet (25 pcs)
- M10032B 1382 ppm calibration solution, 20 mL sachet (25 pcs)
- M10442B 1500 ppm calibration solution, 20 mL sachet (25 pcs)
- M100020B Cal-Test solution for MC315, 20 mL sachet (25 pcs)



- MA811/2 Conductivity probe with 2 m cable
- MA812/2 Conductivity probe with 2 m cable

Ordering Information

MC310 is supplied complete with 12VDC adapter, MA811/2 EC probe, 20 mL 1413 μ S/cm sachet of calibration solution, screwdriver for calibration and instruction.

MC410

TDS Monitor

Reliable TDS monitors with Automatic temperature compensation and 1 point manual calibration powered by a 12 VDC adapter.

They are ideal for the hydroponic market and allow you to continuously monitor TDS values directly in your reservoir.

Other features include: user selectable set point, visual LED alarm when values go above/below (selectable by the user) the set point.

The monitors are very simple to operate:

1. hang your monitor above your reservoir
2. connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area from the water!)
3. immerse 2/3 of the probe in the solution
4. the probe can now remain there permanently.



Specifications

MC410



Range	EC/TDS	0 to 1990 ppm
Resolution	EC/TDS	10 ppm
Accuracy (@25°)		±2% Full Scale
Conversion Factor		0.7
Set point		100 to 1900 ppm
Alarm		active when the measurement is higher/lower than the set point
Temperature Compensation		automatic, from 5 to 50°C
Environment		0 to 50°C; max RH 95%
Probe		MA812/2 (included)
Power Supply		12 VDC power adapter (included)
Dimensions		148,5 x 82,5 x 32 mm
Weight		180 g (meter only)

Set point:

On the MC410 a visual LED alarms when value goes above or below the set point the user selected.



Accessories

- M10031B** 1413 µS/cm calibration solution, 20 mL sachet (25 pcs)
- M10032B** 1382 ppm calibration solution, 20 mL sachet (25 pcs)
- M10442B** 1500 ppm calibration solution, 20 mL sachet (25 pcs)
- M100020B** Cal-Test solution for SMS315, 20 mL sachet (25 pcs)

M100040B

- MA811/2**
MA812/2



- Cal-Test solution for MC415, 20 mL sachet (25 pcs)
- Conductivity probe with 2 m cable
- Conductivity probe with 2 m cable

Ordering Information

MC410 is supplied complete with 12VDC adapter, MA812/2 TDS probe, 20 mL 1382 ppm sachet of calibration solution, screwdriver for calibration and instruction.

Click to buy: www.easeongear.com

Mi190 Extended Range Bench Dissolved Oxygen Meter



Ideal for testing Dissolved Oxygen in the pharmaceutical and food Industry, as well as monitoring in water treatment plants. The user can choose to measure D.O. readings in mg/L or % of saturation of O₂.

This meter can be used for any type of water, as it allows measurements to compensate for temperature, altitude and salinity factors. The automatic logging interval can be set to perform analysis and store data into the memory.

All logged data can be downloaded to your PC through an RS232 or USB serial port. Memory can store up to 50 samples. **Mi190** features an automatic calibration procedure, at 1 or 2 points (at 0 and 100% of O₂ saturation). The polarographic probe supplied with the meter (MA840) measures the current generated by the reaction of O₂ with Ag.

Mi190 is supplied complete with MA840 DO probe with 3 m cable, 2 spare membranes, MA7041 electrolyte solution (30 mL), 12 VDC power adapter, probe holder and instruction manual.



Specifications	Mi190
Range	O ₂ 0.00 to 45.00 mg/L (ppm) % Saturation O ₂ 0.0 to 300% Temp -5.0 to 55.0°C / 23.0 to 131.0°F
Resolution	O ₂ 0.01 mg/L (ppm) % Saturation O ₂ 0.1% Temp 0.1°C / 0.1°F
Accuracy	O ₂ ±1.5 Full Scale % Saturation O ₂ ±1.5 Full Scale Temp ±0.4°C / ±0.8°F
Logging	50 records, LOG on demand or auto-logging
DO Calibration	automatic, 1 or 2 point at 0% (MA9070) and 100% (in air)
Temperature Compensation	0.0 to 50.0°C / 32.0 to 122.0°F
Altitude Compensation	0 to 4000 m; resolution 100 m
Salinity Compensation	0 to 40 g/L; resolution 1 g/L
DO Probe	MA840 with DIN connector (included)
Temperature Probe	Included in DO probe
Calibration	2 points (0.0°C and 50.0°C / 32.0 to 122.0°F)
Logging	up to 50 records, LOG on demand or auto-logging
PC interface	RS232 / USB Opto-isolated
Power supply	12 VDC power adapter (included)
Environment	0 to 50°C / 32 to 122°F; max RH 100%
Dimensions	230 x 160 x 95 mm
Weight	0.9 Kg

Polarographic D.O. Probe

Polarographic D.O. probe with 3 meters cable



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Accessories

- MA9070** Zero Oxygen Solution, 230 mL bottle
- MA9071** Refilling Electrolyte Solution, 230 mL bottle
- MA9310** 12 VDC Adapter, 220 V
- MA9311** 12 VDC Adapter, 110 V
- MA9315** Electrode Holder



- MA841** Spare membrane (5 pcs)
- MA840** DO probe with 3 meters cable
- MA9350** RS232 connection cable with 2 m cable
- Mi5200** Application Software

Ordering Information

Mi190 is supplied complete with:

- **MA840** DO probe with 3 meter cable
- **MA841** Spare membrane (2 pcs)
- **MA9071** Electrolyte solution
- **MA9315** Electrode Holder
- **Mi5200** Application Software
- **MA9350** RS232 connection cable with 2 meters cable
- 12 VDC Adapter
- Instruction manual

Click to buy: www.easeongear.com

Mi605

Portable D.O. Meter for Field Applications

Mi605 is a portable, microprocessor-based, Dissolved Oxygen meter with automatic calibration and temperature compensation (ATC) specifically designed for spot sampling applications.

Dissolved Oxygen measurements can be displayed in parts per million (ppm=mg/L) or in % of saturation.

The temperature is indicated in Celsius from 0 to 50°C with 0.1 resolution. The meter compensates salinity and altitude automatically after manual input.

Calibration is very simple and fast: just expose the polarographic Dissolved Oxygen probe MA840, supplied with the instrument, to air and press the CAL button.

No need for chemical solutions!

A HOLD button allows the user to freeze the reading on the LCD.

The low battery indicator and the easy to replace screw on cap membranes make the Mi605 a compact instrument and ideal for all applications: aquaculture, wastewater, environmental and educational.



Years
warranty
2

ATC

Dual
Display

Self
diagnostics

CE

Specifications	Mi605
Range	O ₂ 0.0 to 45.00 mg/L (ppm) % Saturation O ₂ 0.0 to 300% Temp 0.0 to 50.0°C / 32 to 122°F
Resolution	O ₂ 0.01 mg/L (ppm) % Saturation O ₂ 0.1% Temp 0.1°C
Accuracy (@25°C)	O ₂ ±1.5% Full Scale % Saturation O ₂ ±1.5% Full Scale Temp ±0.5°C
Typical EMC Deviation	O ₂ ±0.3 mg/L (ppm) % Saturation O ₂ ±3.5% Temp ±0.5°C
Calibration	automatic in saturated air
Temperature Compensation	automatic, from 0 to 50°C / 32 to 122°F
Altitude Compensation	0 to 4000 m; 100 m resolution
Salinity Compensation	0 to 80 g/L; 1 g/L resolution
Probe	MA840 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 100%
Battery Type	1 x 9V alkaline (included)
Battery Life	approx. 100 hours of use
Auto-off	after 4 hours of non-use
Dimensions	200 x 85 x 50 mm
Weight	280 g (with battery)

Hard Carrying Case

Mi605 is supplied complete in a hard carrying case complete with a D.O. probe, spare membranes, calibration solutions, battery and instructions.



Accessories

- MA9071** Refilling Electrolyte solution, 230 mL bottle
- MA841** Spare membrane (5 pcs)
- MA840** D.O. Probe



Ordering Information

Mi605 is supplied complete with MA840 polarographic D.O. probe with 3 meters cable, 2 spare membranes, 20 mL bottle of electrolyte solution, rugged carrying case, 9V battery and instructions.

Click to buy: www.easeongear.com

MW600

Entry level, inexpensive Dissolved Oxygen Portable Meter for fast and reliable results


The **MW600** is a compact Portable Dissolved Oxygen meter with Faster Micro Processor. This handy and ergonomically designed portable meter is ideal for anyone working on a low budget and still requires fast and reliable measurements. This portable meter measures Dissolved Oxygen with a Polarographic probe and is suitable for a wide range of applications, such as Educational and Aquaculture, as well as water and environmental analysis.

Other features include smaller, ergonomic and lighter case design, 100% larger and easier to read LCD Display, low battery warning, easy to replace screw on cap membranes and long battery life.

Rugged Carrying Case (Optional) provides handy on-site meter calibration and measurements.

MW600 is supplied complete with a MA840 D.O. polarographic probe with 3 m cable, calibration screwdriver, 2 spare membranes, MA9071s (30 mL) electrolyte solution, battery and instructions.

The **MW600** calibrates easily in 2 points (at 100% saturated air and in 0 Oxygen solution) and has Automatic Temperature Compensation which guarantees the highest accuracy.

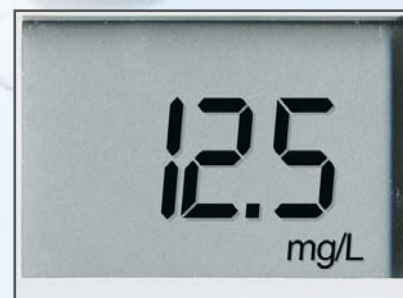

Specifications	MW600
Range	O ₂ 0.0 to 19.9 mg/L
Resolution	O ₂ 0.1 mg/L
Accuracy (@25°C)	O ₂ ±1.5% Full Scale
Calibration	manual on 2 points (zero and slope)
Temperature Compensation	automatic from 0 to 30°C
Probe	MA840 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Battery Type	9V alkaline (included)
Battery Life	approximately 70 hours of use
Dimensions	145 x 80 x 40 mm
Weight	220 g (with battery)

ALTITUDE & SALINITY COMPENSATION:

If the sample contains salts or if you are performing the measurements at altitude different from sea level, the readout values must be corrected, taking into account the lower degree of oxygen solubility.

Altitude Compensation: all the readouts are referred to sea level, thus the displayed measurements are higher than the actual values. In fact, altitude affects D.O. concentration by decreasing its value.

The table on the left reports the oxygen solubility at various temperatures and altitudes, based on sea level barometric pressure of 760 mmHg.

This gives an idea of the error that can be introduced at different altitudes and allows to calculate the quantity to be subtracted to correct the reading.

Altitude, Meters above Sea Level										
°C	0 m	300 m	600 m	900 m	1200 m	1500 m	1800 m	°F		
0	14.6	14.1	13.6	13.2	12.7	12.3	11.8	32.0		
2	13.8	13.3	12.9	12.4	12.0	11.6	11.2	35.6		
4	13.1	12.7	12.2	11.9	11.4	11.0	10.6	39.2		
6	12.4	12.0	11.6	11.2	10.8	10.4	10.1	42.8		
8	11.8	11.4	11.0	10.6	10.3	9.9	9.6	46.4		
10	11.3	10.9	10.5	10.2	9.8	9.5	9.2	50.0		
12	10.8	10.4	10.1	9.7	9.4	9.1	8.8	53.6		
14	10.3	9.9	9.6	9.3	9.0	8.7	8.3	57.2		
16	9.9	9.7	9.2	8.9	8.6	8.3	8.0	60.8		
18	9.5	9.2	8.7	8.6	8.3	8.0	7.7	64.4		
20	9.1	8.8	8.5	8.2	7.9	7.7	7.4	68.0		
22	8.7	8.4	8.1	7.8	7.7	7.3	7.1	71.6		
24	8.4	8.1	7.8	7.5	7.3	7.1	6.8	75.2		
26	8.1	7.8	7.5	7.3	7.0	6.8	6.6	78.8		
28	7.8	7.5	7.3	7.0	6.8	6.6	6.3	82.4		
30	7.5	7.2	7.0	6.8	6.5	6.3	6.1	86.0		
32	7.3	7.1	6.8	6.6	6.4	6.1	5.9	89.6		
34	7.1	6.9	6.6	6.4	6.2	6.0	5.8	93.2		
36	6.8	6.6	6.3	6.1	5.9	5.7	5.5	96.8		
38	6.6	6.4	6.2	5.9	5.7	5.6	5.4	100.4		
40	6.4	6.2	6.0	5.8	5.6	5.4	5.2	104.0		

Accessories

- MA9070** Zero Oxygen calibration solution, 230 mL bottle
MA9071 Refilling Electrolyte solution, 230 mL bottle

- MA840** D.O. Probe
MA841 Spare membrane (5 pcs)



Ordering Information

MW600 is supplied complete with MA840 probe, 2 spare membranes, 20 mL bottle of electrolyte solution, calibration screwdriver, 9V battery and instructions.

Click to buy: www.easeongear.com