


ABYSS CANISTER TECHNICAL BULLETIN

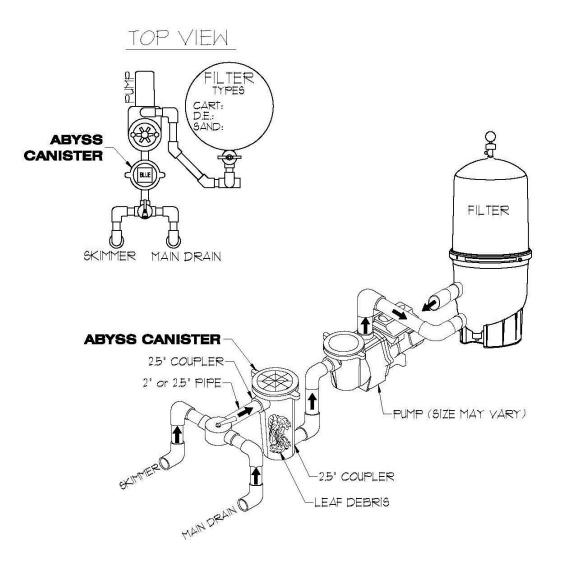

CAUTION: The Abyss canister must be plumbed between the pump and any suction side valves in order to prevent excessive water surges and pressures

Note: Plumb the Abyss canister so lid is at the same elevation as the pump lid Use 2" or 2.5" plumbing

BLUE SQUARE MFG Developing Tomorrow's Pool Technology*