

# Adding Cameras to your Connect2Go Account

## Step #1:

When you are logged into your Connect2Go Account Click on your Security System Icon on the left of the screen. In this example it is labeled Home Security System. Then click on the Cameras Icon from that page.




## Step #2:

In this example there are no cameras presently added so click on the "Add Camera" button shown here.




## Step #3:

Select whether your camera is on the same network as your security system. Pick External from this dropdown menu if your camera is in a different physical location or on a different router. For this example we are on the same LAN as our security system.

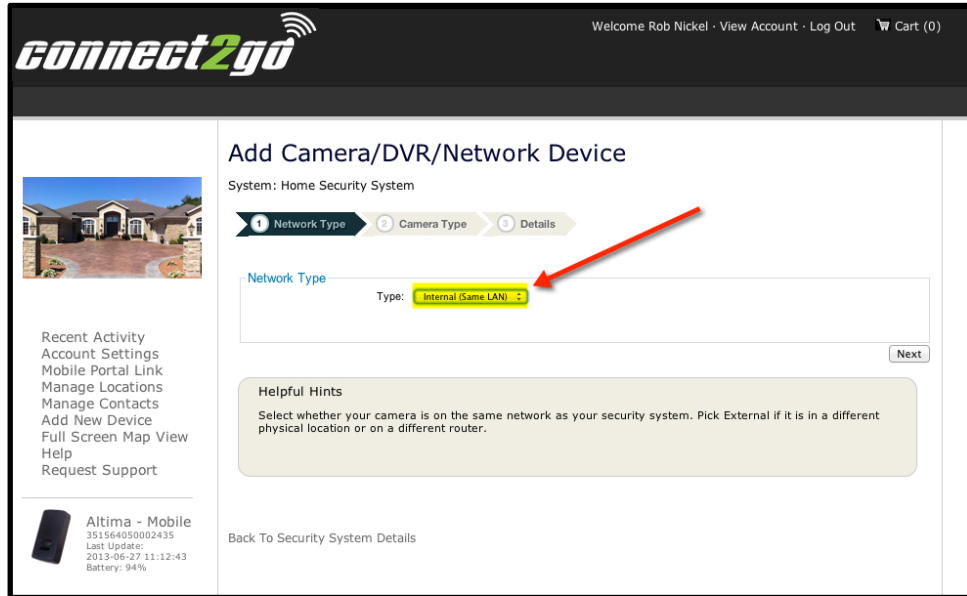

## Step #4:

If your camera is listed in the dropdown menu on this page under Camera/Device Type select that camera for all others select "Other/Generic". In this example a Foscam FI8910W Indoor/PT Camera.

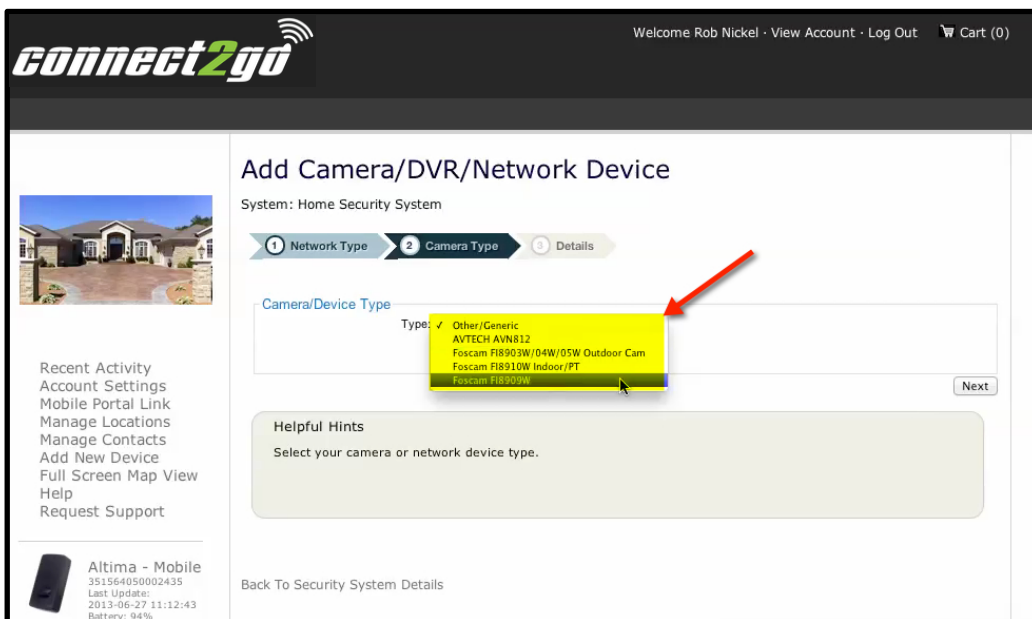

## Step #5:

In this section you can give your device a name, enter the port number for your camera and enter the username and password for that camera. In this example we named the device "Office Camera" and entered the external port 32750 with the username of "Guest" and password of "password". Then click next

The screenshot shows the 'Add Camera/DVR/Network Device' page for a 'Home Security System'. The progress bar indicates three steps: 1. Network Type, 2. Camera Type, and 3. Details. The 'Details' section is highlighted with a yellow background and contains the following information:

Name:	Office Camera
Port:	32750
UserName:	guest
Password:	password

A red arrow points to the 'Next' button located at the bottom right of the details form. Below the form is a 'Helpful Hints' section with two paragraphs of text. On the left side of the page, there is a sidebar with navigation links and a mobile device status section for 'Altima - Mobile'.

## Step #6:


Your camera is now added. Go back to your Details page and you will now see the live thumbnail view of that camera and any other cameras you add. From here we can click on view or edit that camera.

The screenshot shows the 'Details for Home Security System' page. The page header includes the 'connect2go' logo and user information. The main content area is titled 'System' and 'Details for Home Security System'. It displays the following information:


- MAC: 001C2A0031AA
- Version: 114
- Last Update: June 27, 2013, 11:39 am

Below this information is a 'Command Queue' section showing 'No Commands Queued'. A row of icons represents different system components: Status, EnvisAlarm™, EnvisAlerts™ +, Recent Events, Cameras, Thermostats, and Contacts. At the bottom, there is a 'Cameras' section with an 'Add Camera' button. A red arrow points to a camera thumbnail labeled 'Office Camera' with 'View' and 'Edit' options.

When you click on view you will now see a full size view of your camera live, and if available you can also control your camera's pan-tilt-zoom or other features as highlighted.

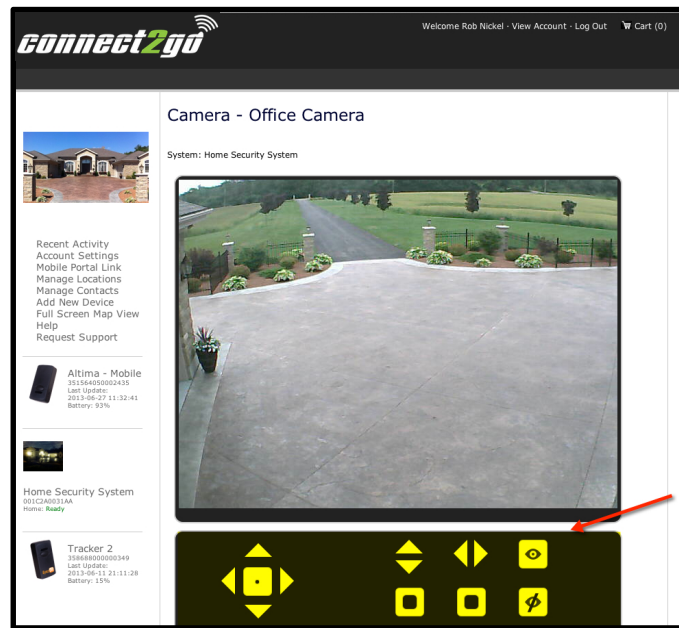

If you click on "Edit" you can go back and edit the details, and click on the "Update" button so the changes are saved.

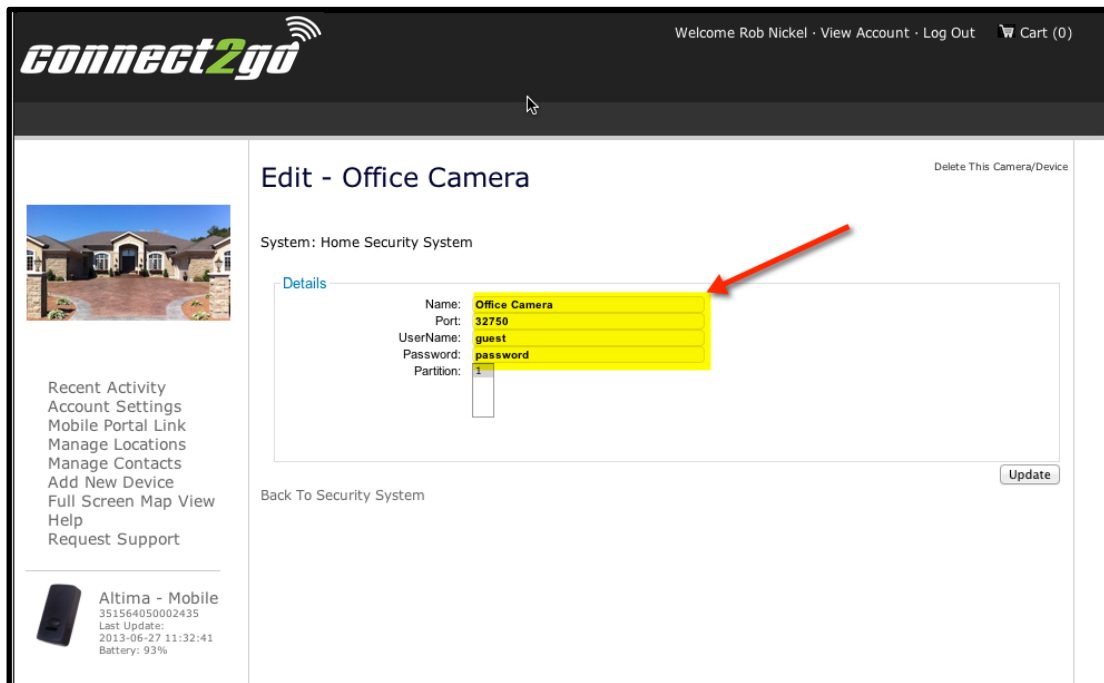

If you want to delete the camera totally from your Connect2Go Account simply click on the "Delete the Camera/Device button shown here.

The screenshot displays the Connect2Go web interface. At the top left is the logo, and at the top right, it says "Welcome Rob Nickel - View Account - Log Out" and "Cart (0)". The main heading is "Edit - Office Camera". Below this, it says "System: Home Security System". A red arrow points to a yellow button labeled "Delete This Camera/Device" in the top right corner. The "Details" section contains a form with the following fields: Name: Office Camera, Port: 32750, UserName: guest, Password: password, and Partition: 1. There is an "Update" button at the bottom right of the details form. On the left side, there is a sidebar with a list of links: "Recent Activity", "Account Settings", "Mobile Portal Link", "Manage Locations", "Manage Contacts", "Add New Device", "Full Screen Map View", "Help", and "Request Support". Below the sidebar, there is a section for "Altima - Mobile" with a small image of a phone and the text: "351564050002435", "Last Update: 2013-06-27 11:32:41", and "Battery: 93%".