



#### **Patio Comforts**


877-264-3794 • www.patiocomforts.com customerservice@patiocomforts.com

# APPLICATION INFORMATION INFRATECH QUARTZ-TUBE ELECTRIC INFRARED RADIANT HEATERS FOR COMFORT HEATING


The following information is designed to help you apply and install INFRATECH QUARTZ TUBE ELECTRIC RADIANT HEATERS in a variety of locations. INFRATECH heaters are one of the most economical of all radiant heaters to buy, and can be some of the least costly to operate. They may also be the most economical to install, depending on the location of electrical power adequate to operate the heater(s) properly.

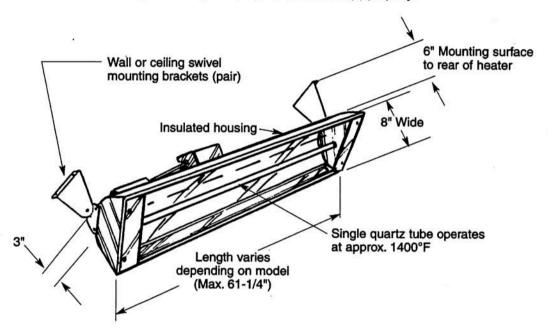


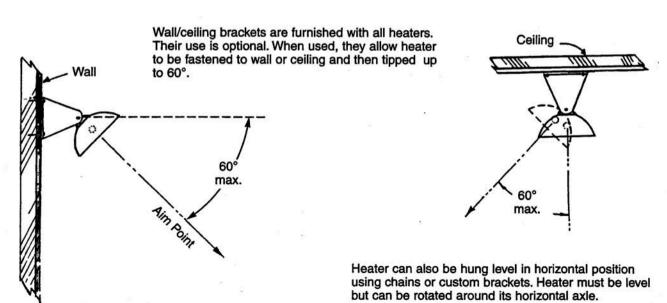


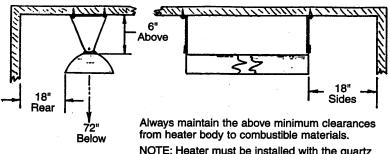

NOTE: Heater must be installed with the quartz tube horizontally level. For maximum tube life, use a level on body of heater to find level position.

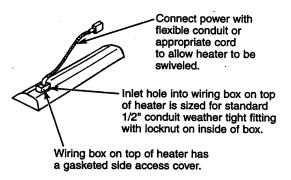


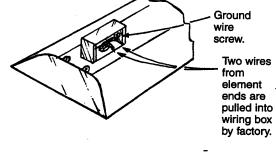

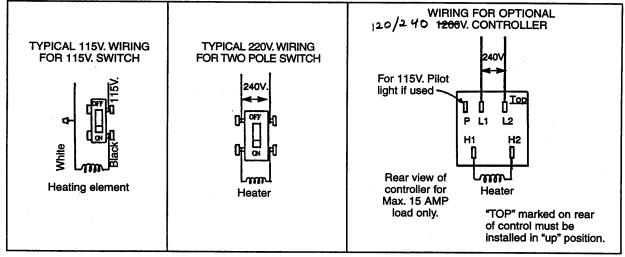

Use thin 11/32" wrench to hold inside nut. Nuts must be tight.

Connect High Temp Stainless terminal on wire ends to element ends.





## **LOCATION SUGGESTIONS**


# NOT RECOMMENDED

### **RECOMMENDED**

Unless heaters are installed over 12 ft. high, it is generally recommended that radiant heaters be mounted on an angle to assure that radiant warmth is distributed from the side rather than straight down on the heads and shoulders of people being warmed.

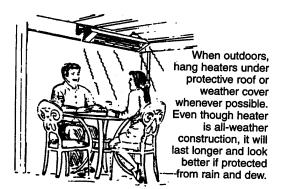


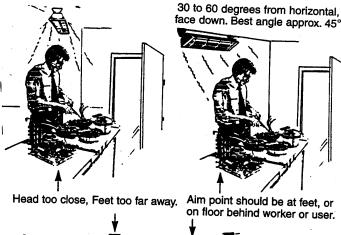



Warm floor reradiates heat. Warm air rises from floor. Some heat reflects from floor.

Mounting a heater directly over a work table or other obstruction will block radiation, primarily heating the object. It is preferable to move the heater to the side, allowing it to heat the floor as well.

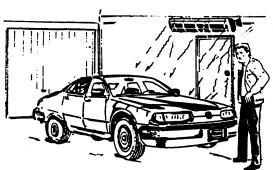


Install fixture to heat the area from the "cold side" if practical. This helps compensate for increased body heat losses on the cold side.

#### **GENERAL NOTES:**

- INFRATECH RADIANT HEATERS are furnished with wall/ceiling mount swivel brackets. These brackets may be discarded when the heater is hung with chains or other special bracketing.
- 2. See sales literature and price list for full listing of models, descriptions, amperages, and voltages.
- 3. For comfort heating, it is usually best to beam radiant heat onto people from two sides rather than from just one side. There are times when this is not practical. The following chart is for warming from one side only.
- 4. If insufficient overhead clearance exists to allow mounting at the recommended heights, heaters may be mounted lower and tipped up at any angle. At lower mounting heights, however, the heater is closer to the area of use and could prove too warm for people close to the heater.
- At times, especially when the mounting height must be quite low, an increased number of smaller heaters can help prevent overeating.
- 6. Heaters up to 15 amps can be used with the simple controller described on the price sheet. This controller, which is actually a percentage timer, allows the heater to be turned down to the precise amount of heat required. In critical commercial applications, such as in restaurants where patrons are forced to sit in one place in front of a heater, it is highly recommended that you use heaters rated under 15 amps and use this controller.

# RECOMMENDED MOUNTING HEIGHT AND WATT CHART FOR BODY COMFORT

### AVERAGE RECOMMENDED WATTS PER SQ. FT. FOR BODY COMFORT

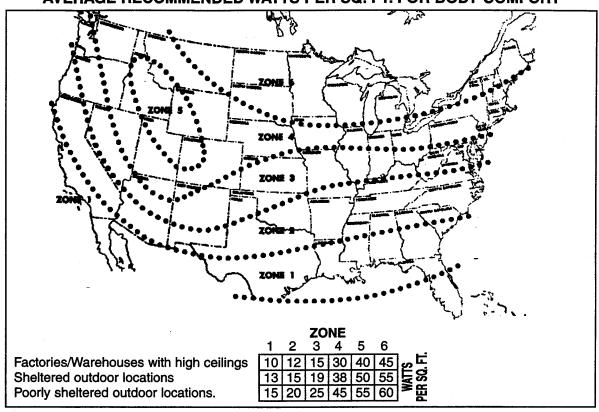

# **TOTAL WATTS**

F	_	750	1000	1500	2000	2500	3000	4000	5000
i X	8'	<u>8x8</u> 12	8x10 12.5	8x10 18	8x10 25				
Ť	10'	10x10 7.5	9x12 14	9x12 13.5	9x12 16.5	9x12 23	12x18 13.8	12x18 18.5	12x18 23
RE	12'		10x14 11	10x14 10.7	10x14 14.2	10x14 17.8	13x20 11.5	13x20 15.3	13x20 19
Н	14'	<b>.</b>			11x16 11.3	11x16 14.2	14x22 9.7	14x22 12.9	14x22 16
EIC	16'	AREA WATTS PER				12x8 11.5	15x24 8.3	15x24 11.1	15x24 13
G H T	18'	SC	QUARE F	-оот			16x26 7.2	16x26 9.6	16x26 12