



---

## Rachio Irrigation Control Installation Guide

---


### Getting Started

Install the Rachio Controller, connect the system to Wi-Fi and configure schedules and zones in the Rachio app before adding Rachio to an Alarm.com account. See Rachio's installation guide for details.

#### To Add the Rachio Controller to an Alarm.com Account:

1. Log in to the Alarm.com Dealer Website
2. Add the Irrigation Service Plan add-on to the account
3. Log in to the Alarm.com app
4. On the **home page of the app**, scroll to the Irrigation card and tap "Connect to account"
5. Enter the customer's Rachio app credentials and select "Allow Access"
6. Wait for the controller to load. The Irrigation card will automatically refresh after authorization is complete.



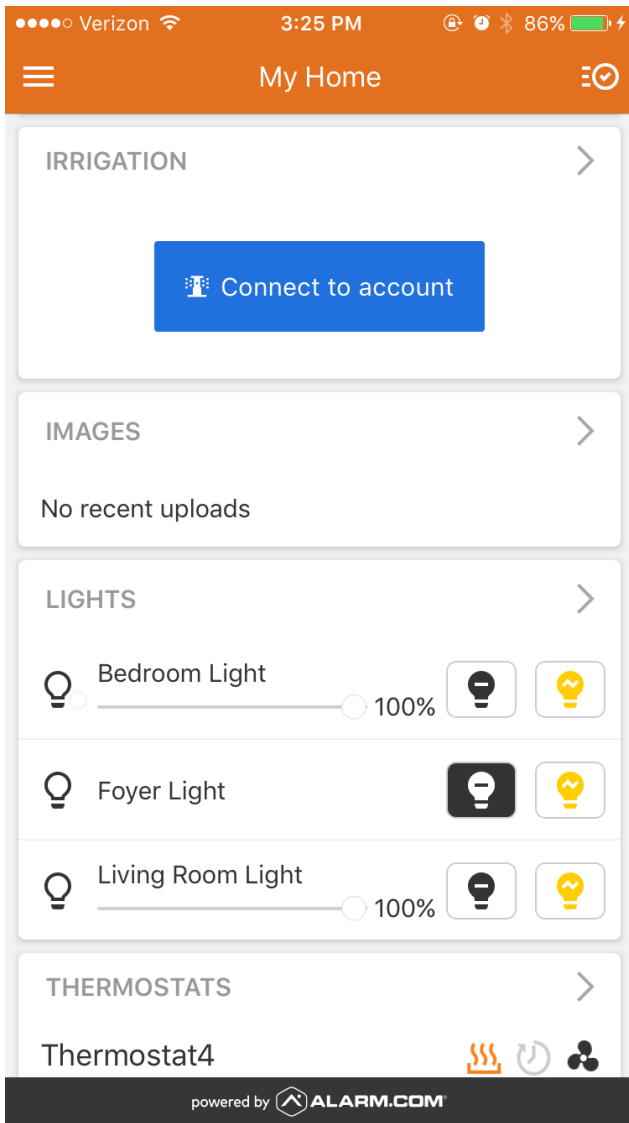

---

## Real-Time Irrigation Control


### View and control Irrigation on the Alarm.com app

**Note:** You must use the Alarm.com app to view Irrigation details. Irrigation is not yet available on the Alarm.com Customer Website.

#### Irrigation Card

The Irrigation Card displays the current status of your Rachio controller, whether it is currently in use or when it was last in use. It also displays if the controller is in Rain Delay or Standby mode.



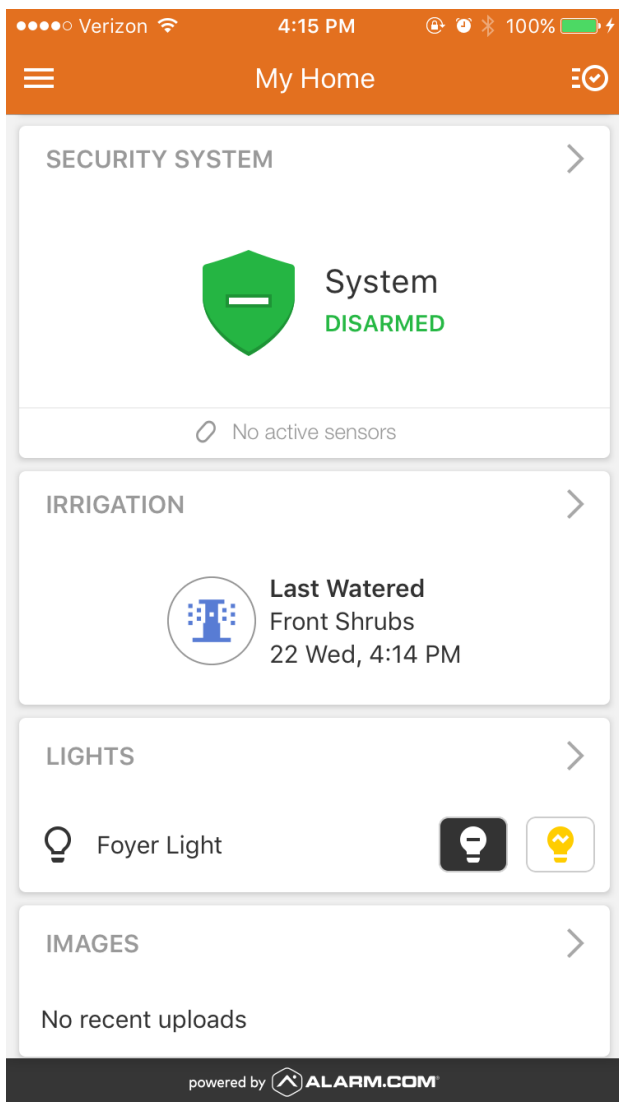


**Note:** Last Watered displays the last zone watered, regardless of whether it was watered through a schedule or manually.

### Irrigation Feature Screen

1. Set Rachio to Standby or Rain Delay
2. Start watering an individual zone, all zones or run a schedule
3. View the last time each zone was watered



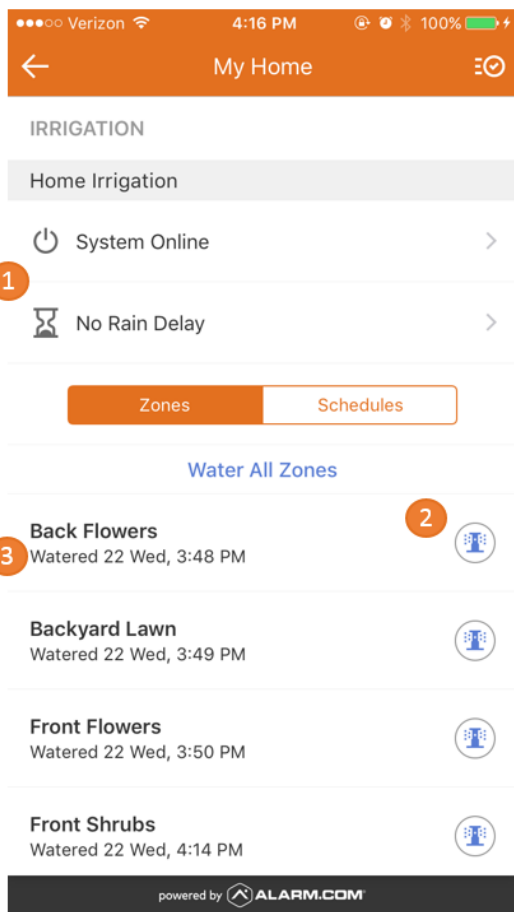

## Tips for Use

- You cannot interact with a zone or schedule while watering. Select "Stop Watering" before making changes.
- To water zones that are not in a schedule, select "Water All Zones" and deselect zones as desired.
- Schedule names are visible in the Alarm.com app, but the zones and durations are only available in the Rachio app. Use the Rachio app to give each schedule a descriptive name for easy reference from the Alarm.com app.
- If you are adding Rachio and Rain Bird systems to the same account, Rachio must be added first.
- To change zone names, use the Devices page on the Customer Website: <https://www.alarm.com/web/Automation/Devices.aspx>

## Delete a Device

To remove a Rachio controller from a customer account, use the Dealer Website. Find the customer's account and navigate to Equipment > emPower Devices > Rachio > Log out of Rachio Account

